




## Retroreflective sensor ML9-54-G/25/136/115




- Ultra bright LEDs for power on, weak signal indication and switching state
- Flashing power on LED in case of short-circuit
- TEACH-IN
- Automatic adjustment in case of soiling in contrast detection mode
- Not sensitive to ambient light, even with switched energy saving lamps
- Protected against mutual interference (no cross-talk)
- Protection class II

Retroreflective sensor with polarization filter for clear object detection



### Dimensions

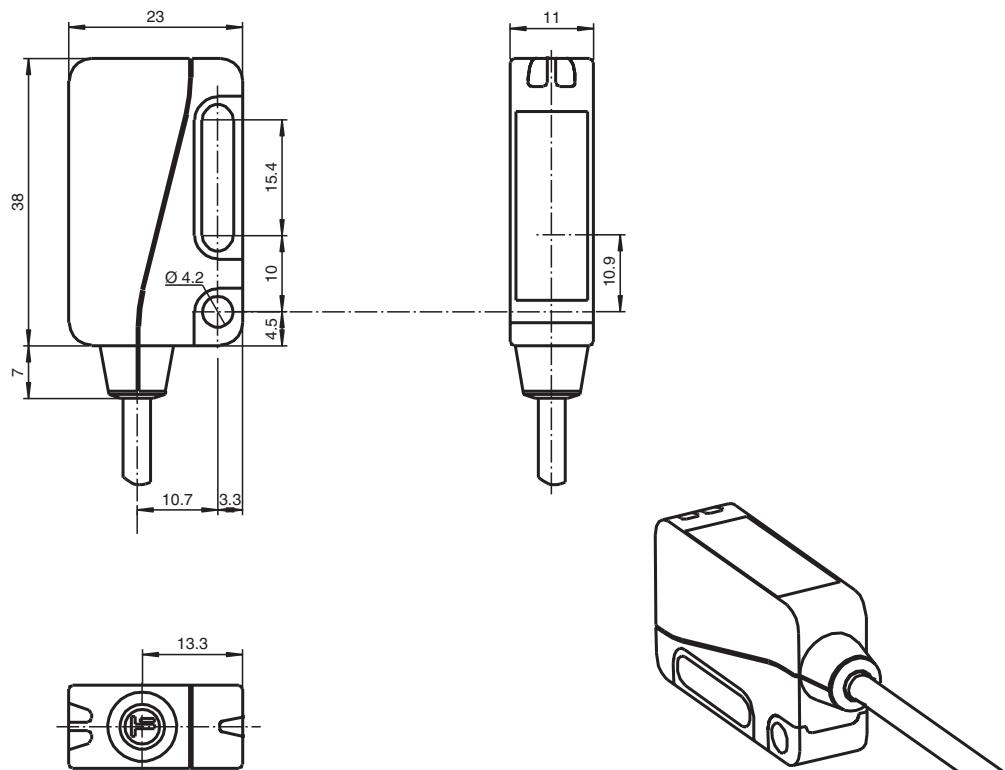

### Technical Data

#### General specifications


Effective detection range	0 ... 3.5 m in TEACH mode 0 ... 5.7 m in normal mode
Reflector distance	0 ... 3.5 m in TEACH mode 0 ... 5.7 mm in normal mode
Threshold detection range	7.6 m

## Technical Data

Reference target	H85-2 reflector	
Light source	LED	
Light type	modulated visible red light , 660 nm	
Polarization filter	yes	
Angle deviation	max. $\pm 1^\circ$	
Diameter of the light spot	approx. 40 mm at detection range 1 m	
Opening angle	1.7 °	
Ambient light limit	40000 Lux	
<b>Functional safety related parameters</b>		
MTTF <sub>d</sub>	1050 a	
Mission Time (T <sub>M</sub> )	20 a	
Diagnostic Coverage (DC)	0 %	
<b>Indicators/operating means</b>		
Operation indicator	LED green, statically lit Power on , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz)	
Function indicator	LED yellow: switching state ; Stability control ; Teach-In	
Control elements	Teach-In key	
Contrast detection levels	10 % - clean, water filled PET bottles	
<b>Electrical specifications</b>		
Operating voltage	U <sub>B</sub>	10 ... 30 V DC , class 2
Ripple		max. 10 %
No-load supply current	I <sub>0</sub>	< 20 mA at 24 V DC
<b>Output</b>		
Switching type	light-on	
Signal output	2 push-pull (4 in 1) outputs, complementary, short-circuit proof, reverse polarity protected	
Switching voltage	max. 30 V DC	
Switching current	max. 100 mA	
Switching frequency	f	1000 Hz
Response time		500 µs
<b>Conformity</b>		
Product standard	EN 60947-5-2	
<b>Approvals and certificates</b>		
EAC conformity	TR CU 020/2011	
Protection class	II, rated voltage $\leq$ 50 V AC with pollution degree 1-2 according to IEC 60664-1 functional insulation acc. to DIN EN 50178	
UL approval	cULus	
CCC approval	CCC approval / marking not required for products rated $\leq$ 36 V	
<b>Ambient conditions</b>		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
Storage temperature	-40 ... 75 °C (-40 ... 167 °F)	
<b>Mechanical specifications</b>		
Housing width	23 mm	
Housing height	38 mm	
Housing depth	11 mm	
Degree of protection	IP67	
Connection	2 m fixed cable	
Material		
Housing	PC (glass-fiber-reinforced Makrolon)	
Optical face	glass	
Mass	approx. 25 g	


## Connection Assignment

Option:

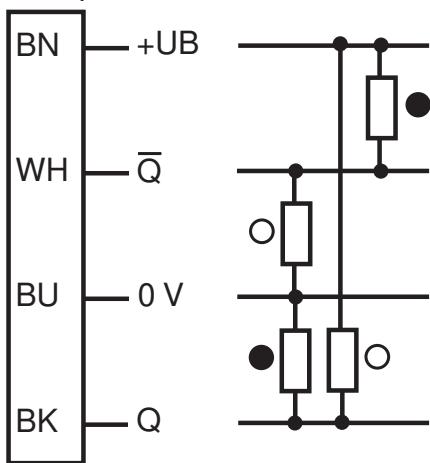


○ = Light on  
● = Dark on

## Assembly

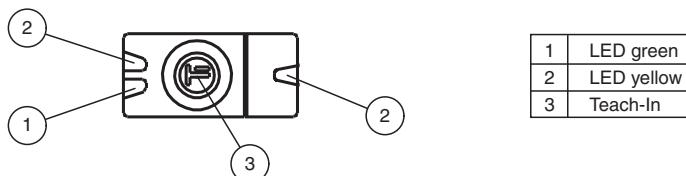

## Characteristic Curve

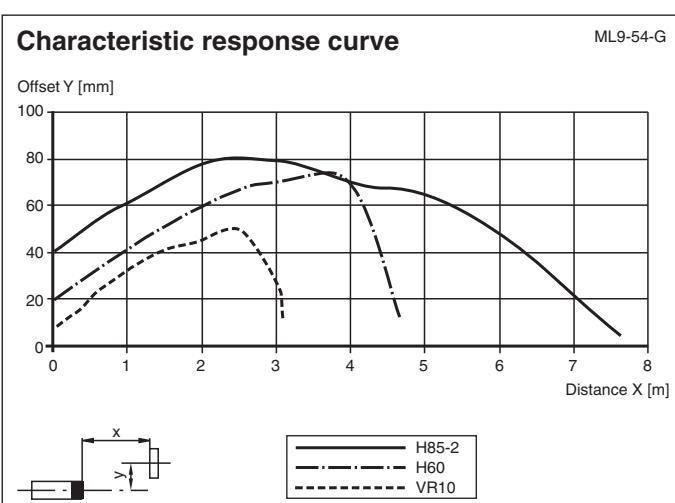


## Characteristic Curve

### Relative received light strength in standard mode


ML9-54-G...

Reflector type:

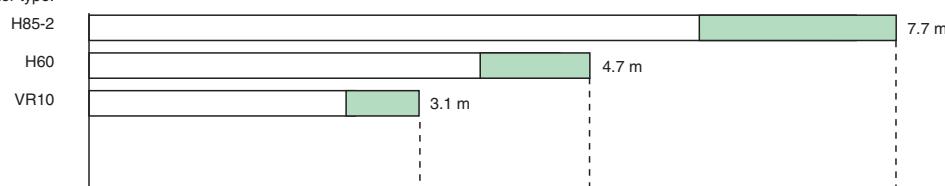

Stability control


- Stability control > 2
- Stability control < 2

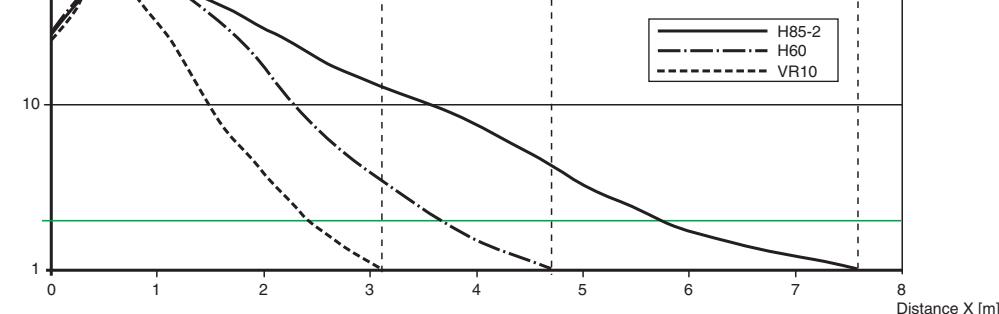

### Relative received light strength in glass detection mode


ML9-54-G...

Reflector type:

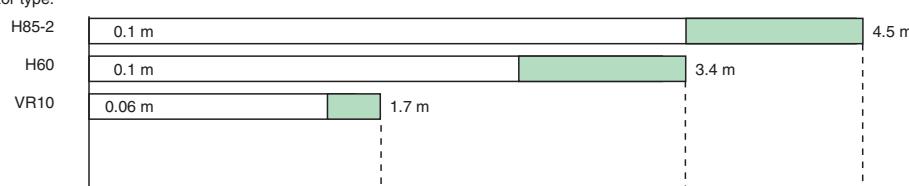

Stability control

- Stability control > 2
- Stability control < 2

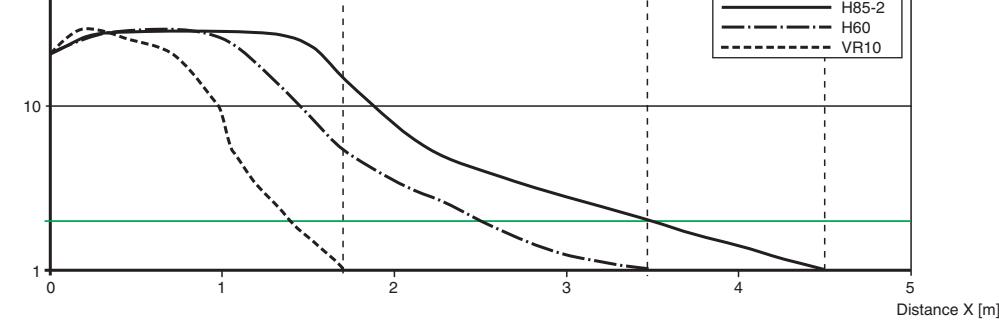

## Accessories



OMH-ML9

Mounting aid for ML9 series, Mounting bracket



OMH-ML9-01

Mounting aid for ML9 series, Threaded bolt M3

**Adjustment instructions****Adjustment instructions for devices with Teach-In**

After the operating voltage has been applied, the LED is lit green. The sensor is automatically set to a state of maximum sensitivity (state as supplied) or the state of the most recent Teach-In setting.

Assemble the appropriate reflector opposite the light barrier.

**Teach-In using the Teach key**

- Align the sensor to an appropriate reflector.
- Press the Teach key - as confirmation, the green display LED is briefly turned off once.
- Hold the Teach key down until the yellow and green display LED is flashing at regular intervals (about 2.5 Hz). Then release the Teach key.
- During the internal set-up of the sensor, the green and yellow display LEDs flash alternately (about 2.5 Hz).
- Teach-In successful: The green and yellow display LEDs are lit. Contrast detection 10% is activated. The device is ready for operation.
- Teach-In not successful: The green and yellow display LEDs flash alternately and rapidly (about 8 Hz) for about 5 seconds. Then the sensor goes to the state with maximum sensitivity.

After this happens, repeat the Teach-In procedure, starting with step 1.