


Sensor output interface terminal KCD2-R

- Relay output with 1 pole, yellow LED indicates switching state
- Free-wheeling diode
- Compact terminal housing
- Clips onto standard 35 mm rail to DIN EN 50 022
- Degree of protection IP20

Sensor output interface terminals with relay output



Dimensions

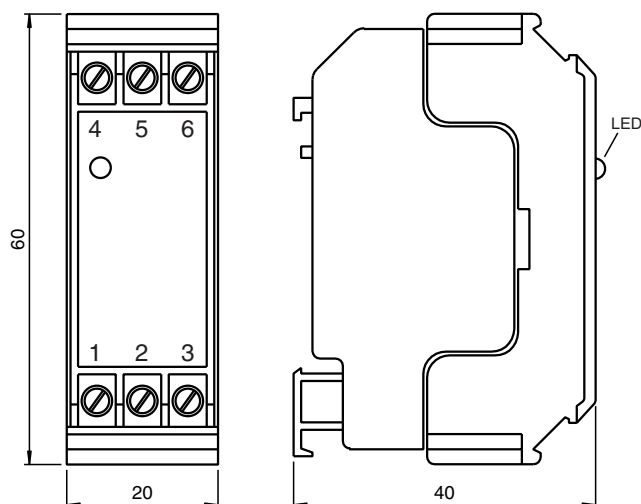

Technical Data

Functional safety related parameters

MTTF _d	19699 a
-------------------	---------

Indicators/operating means

LED yellow	switch output
------------	---------------

Electrical specifications

Operating voltage	U _B	24 V DC ± 15 %
Ripple		≤ 10 %
Operating current	I _B	16 mA

Input

Release date: 2020-03-20 Date of issue: 2020-03-26 Filename: 019498_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Connection	terminals 2+, 3-	
Connectable sensor types		PNP or NPN 3-wire sensors
Output		
Switching frequency	f	≤ 10 Hz
Relay		1 changeover contact
Contact loading		30 V DC/2 A resistive load
Delay		Pull-in: approx. 6 ms Drop-out: approx. 2 ms
Mechanical life		≥10 ⁸ switching cycles
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Standard conformity		
Degree of protection		EN 60529:2000
Noise immunity		EN 61326-1:2013
Ambient conditions		
Ambient temperature		-25 ... 60 °C (-13 ... 140 °F)
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		self-opening apparatus connection terminals, max. core cross-section 0.34 ... 2.5 mm ²
Mass		60 g
Dimensions		20 mm x 60 mm x 40 mm

Connection

