



Power supply K24-STR-24..30VDC-10A

- 8 ... 10 A output load
- 230/115 V AC supply voltage
- Sustained short-circuit proof, overload-proof and open-circuit proof
- 24 ... 30 V DC output voltage, can be regulated
- LED operating display
- LED output overload indicator
- SELV
- Suitable for AS-Interface power supply in gateway-integrated data decoupling


Power supply, 24 to 30 V DC, 10 A



Function

The slim-line power pack provides a direct voltage in an even larger adjustable output voltage range of 23 ... 30 V DC, while optimizing the space available in the control cabinet.
The current limit can be adjusted via an internal potentiometer. In addition to an LED showing the operational status (power), a red LED (overload) signals overloads on the output side.
The connecting leads on the input side are safely covered with the plastic cover after installation. The device features a convenient DIN rail fastening.

Dimensions

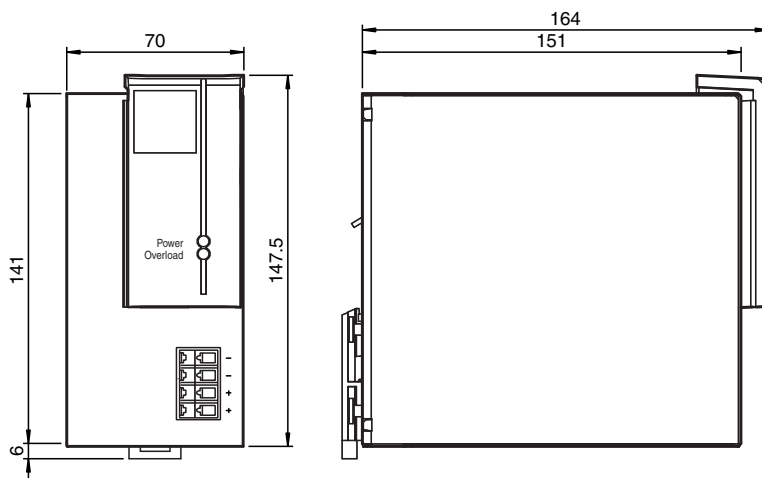

Technical Data

General specifications

UL File Number	E223176
----------------	---------

Indicators/operating means

LED Overload	Red LED lights up for overload, flashes for hiccup mode
LED PWR	LED green
Potentiometer	Top: Output current limitation (covered by a dummy plug) Bottom: Output voltage adjustment


Electrical specifications

Fusing	6.3 AT
Capacity factor	approx. 0.6 (Depending on input voltage)


Technical Data

Rated operating voltage	U _e	115/230 V AC (for 115 V range, jumper) Range: 93 to 132 V AC/187 to 265 V AC
Rated operating current	I _e	4.0 A (115 V) 1.9 A (230 V)
Supply frequency		47 ... 63 Hz
Efficiency		approx. 89 %
Output		
Current limit		approx. 12 A
Voltage		30 V ± 1 % Adjustment range 22.5 ... 29.5 V AC
Current		0 ... 10 A
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 55011, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2 class A, EN 61000-3-3, EN 61010-1
Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
Conformity		
Degree of protection		IEC 60529:2001
Standard conformity		
Electromagnetic compatibility		EN 55011, EN 61000-6-1, EN 61000-6-2
Standards		Harmonic waves: EN 61000-3-2 Class A Interference suppression: EN 55022, EN 55011 Class B Electrostatic discharge (ESD): IEC 61000-4-2 (8 kV contact discharge, 15 kV air discharge) Electromagnetic fields: IEC 61000-4-3 (10 V/m) Burst: IEC 61000-4-4 (4 kV input, 2 kV output/capacitively coupled) Surge: IEC 61000-4-5 (4 kV asymmetrical, 4 kV symmetrical) Conducted interference: IEC 61000-4-6 (10 V, 150 kHz to 80 MHz)
Ambient conditions		
Ambient temperature		-10 ... 70 °C (14 ... 158 °F) with free convection
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications		
Housing length		140 mm
Housing width		70 mm
Housing height		132.5 mm
Degree of protection		IP20
Protection class		I, Protective conductor connection necessary
Connection		Connection terminals, max. conductor cross-section 0.5 to 2.5 mm ² Stripping length 5 to 6 mm
Mass		approx. 1200 g
Mounting		DIN mounting rail

Connection

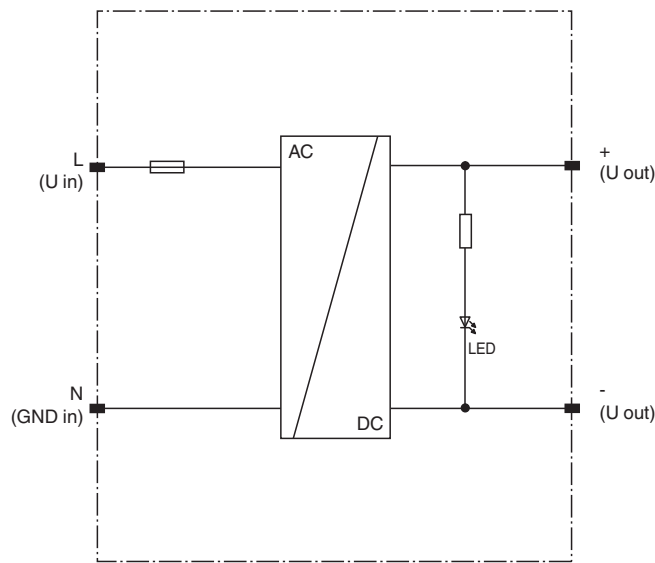



Assembly

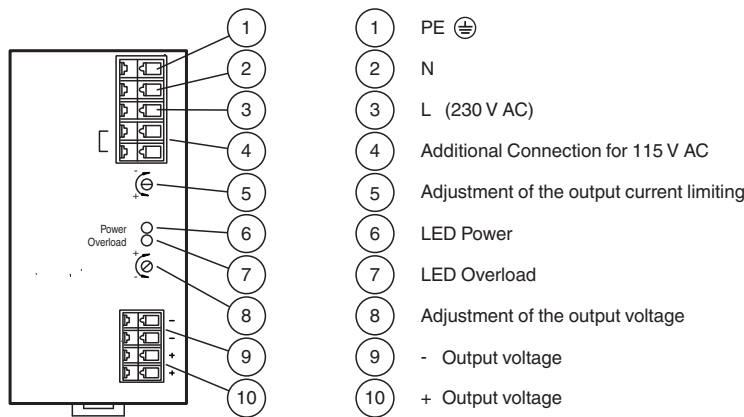

Mounting

In order to ensure proper heat dissipation the power supply has to be mounted vertically in such a way, that the input terminals (L/N/PE) are located at the upper side and the output terminals (+/-) at the lower side of the front panel.
A minimum clearance of 100 mm beneath and above and 30 mm to the right and left of the power supply must be provided.
The inlet air temperature beneath the unit must not exceed the values specified in the technical specification.

Characteristic Curve

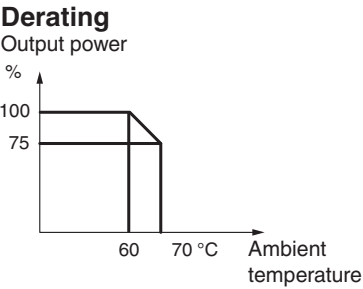

Release date: 2023-11-21 Date of issue: 2023-11-21 Filename: 195762_eng.pdf