




Read head WCS3B-LS710HS

- EtherCAT interface
- Non-contact, absolute position encoder
- Automatic detection of dirt accumulation
- Speed transfer
- Extended temperature range

Read head with EtherCAT interface



Dimensions

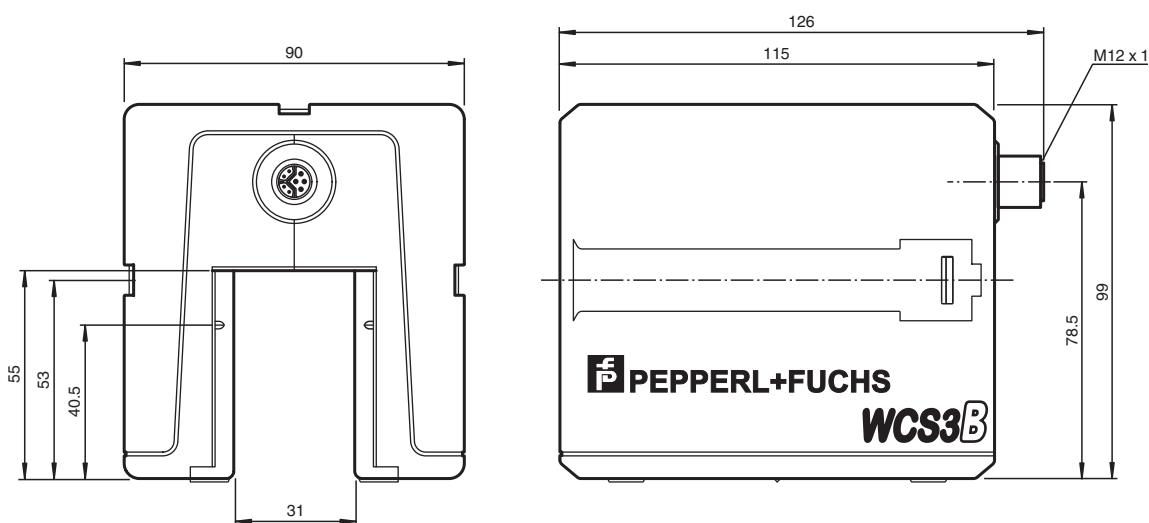

Release date: 2023-10-09 Date of issue: 2023-10-09 Filename: 199290-0058_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Dimensions

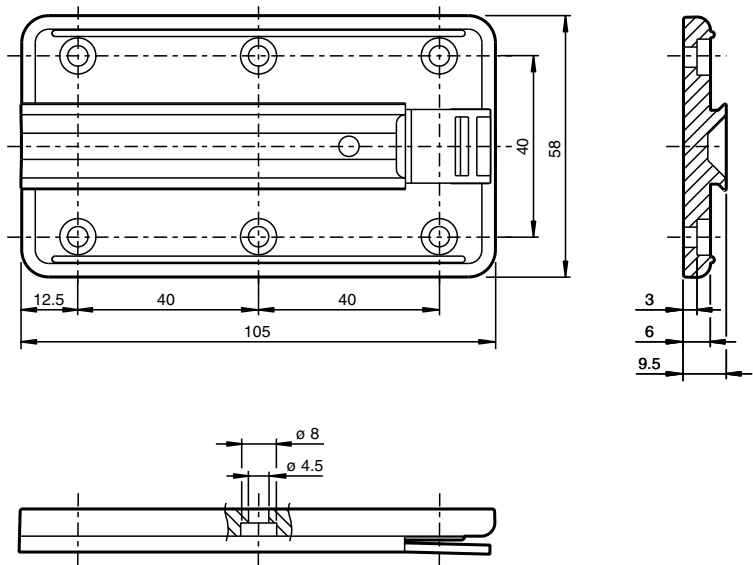

Technical Data


General specifications		
Sampling rate		1.5 ms
Passage speed	v	≤ 12.5 m/s
Measuring range		max. 314.5 m
Free tolerances to code rail		horizontal: 31 mm (± 15.5 mm) vertical: 28 mm (± 14 mm)
Resolution		± 0.4 mm (1,250 positions/m)
Functional safety related parameters		
MTTF _d		74 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
LED indication		Status indication Green: code rail detected, normal function Red: system error Flashing red: no code rail detected
LED ERROR		Error status (red) see manual for coding
LED RUN		Off: init Flashing (green): pre-operational Single flash (green): safe-operational On (green): operational
LED Link/Act		Port status (green)
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Power consumption	P ₀	18 W
Interface		
Interface type		Ethernet ; 100 BASE-TX
Data output code		binary code
Protocol		EtherCAT®
Transfer rate		100 MBit/s
Output		

Release date: 2023-10-09 Date of issue: 2023-10-09 Filename: 199290-0058_eng.pdf

Technical Data

Output velocity	switching output short-circuit protected
Switching voltage	Operating voltage
Load current	max. 25 mA
Standard conformity	
Emitted interference	EN 61000-6-4:2007+A1:2011
Noise immunity	EN 61000-6-2:2005
Shock resistance	EN 60068-2-27:2009
Vibration resistance	EN 60068-2-6:2008
Approvals and certificates	
CSA approval	cCSAus Certified, General Purpose Class 2 power source
CCC approval	CCC approval / marking not required for products rated ≤36 V
Ambient conditions	
Operating temperature	-40 ... 60 °C (-40 ... 140 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Connection type	8-pin, M12 x 1 connector socket, Y-coded
Cable gland	Max. tightening torque of the cap nut: ≤ 0.4 Nm
Degree of protection	IP54
Material	
Housing	ABS , PC (Polycarbonate)
Mass	500 g
General information	
Ordering information	Mounting plate included with delivery

Connection Assignment

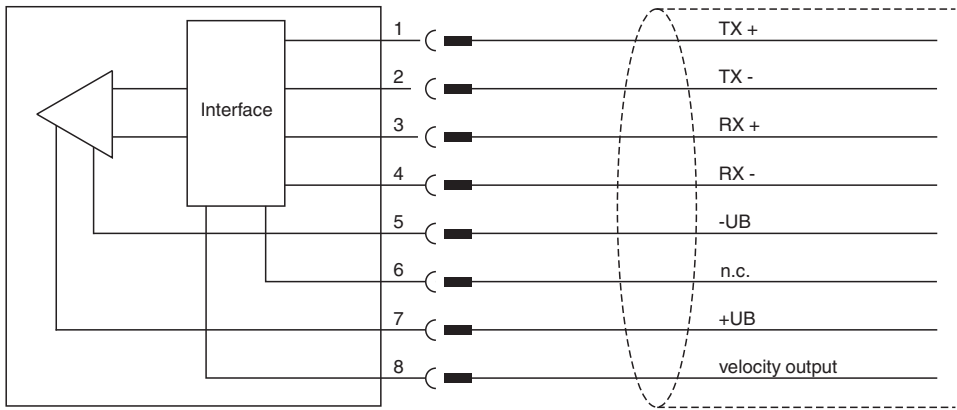

Connection Assignment



Release date: 2023-10-09 Date of issue: 2023-10-09 Filename: 199290-0058_eng.pdf

Accessories

	WCS3B-PL2	Transparent protective case and seal for WCS3B reader
	WCS-MP1	Mounting plate for reading heads WCS2 and WCS3
	V45-GP	Male connector RJ45 straight 4-pin, Cat5, shielded, field-attachable, insulation displacement connection, Outdoor
	V15S-W-ABG-PG9	Male connector M12 angled A-coded 5-pin, for cable diameter 5 - 8 mm, shielded, field-attachable
	V15S-G-ABG-PG9	Male connector M12 straight A-coded 5-pin, for cable diameter 5 - 8 mm, shielded, field-attachable
	V19SY-Y-V1D/V1S	Y-Splitter M12 plug 8-pin Y-coded to M12 socket 4-pin D-coded / M12 plug 4-pin A-coded