



# Safety light curtain


## SLC14-150/129/151



- Sensing range up to 5 m
- Resolution 14 mm (finger protection)
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- Master/Slave detection, Plug and Play
- Degree of protection IP67
- Integrated function display
- Pre-fault indication
- Connection via appliance socket M12 x b1
- Safety outputs OSSD in potential-separated semiconductor version
- Protective field height up to 1800 mm
- Start/Restart disable preset by Option /129



## Dimensions

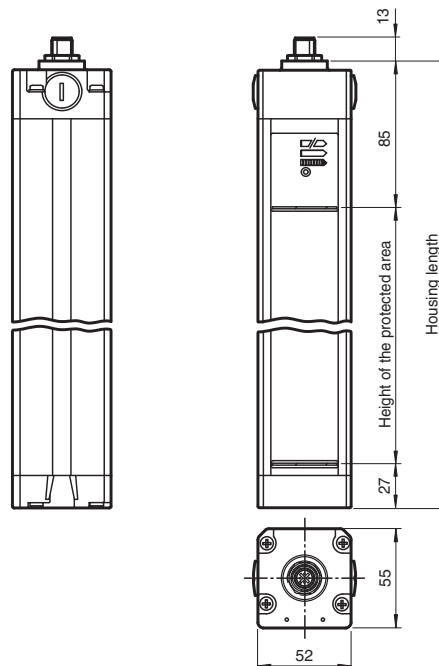

## Technical Data

### System components

|          |                     |
|----------|---------------------|
| Emitter  | SLC14-150-T/92      |
| Receiver | SLC14-150-R/129/151 |

### General specifications

|                           |                          |
|---------------------------|--------------------------|
| Effective detection range | 0.2 ... 5 m              |
| Light source              | IRED                     |
| Light type                | modulated infrared light |
| LED risk group labelling  | exempt group             |

Release date: 2020-03-23 Date of issue: 2020-10-06 Filename: 199719\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

|                                             |                |                                                                                                                |
|---------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------|
| Tests                                       |                | IEC/EN 61496                                                                                                   |
| Safety type according to IEC/EN 61496       |                | 4                                                                                                              |
| Width of protected area                     |                | 0.2 ... 5 m                                                                                                    |
| Protection field height                     |                | 150 mm                                                                                                         |
| Number of beams                             |                | 16                                                                                                             |
| Operating mode                              |                | can be selected with or without start/restart disable                                                          |
| Optical resolution                          |                | 14 mm                                                                                                          |
| Angle of divergence                         |                | < 5 °                                                                                                          |
| <b>Functional safety related parameters</b> |                |                                                                                                                |
| Safety Integrity Level (SIL)                |                | SIL 3                                                                                                          |
| Performance level (PL)                      |                | PL e                                                                                                           |
| Category                                    |                | Cat. 4                                                                                                         |
| Mission Time (T <sub>M</sub> )              |                | 20 a                                                                                                           |
| PFH <sub>d</sub>                            |                | 2.42 E-8                                                                                                       |
| Type                                        |                | 4                                                                                                              |
| <b>Indicators/operating means</b>           |                |                                                                                                                |
| Operation indicator                         |                | 7-segment display in emitter                                                                                   |
| Diagnostics indicator                       |                | 7-segment display in receiver                                                                                  |
| Function indicator                          |                | in receiver:<br>LED red: OSSD off<br>LED green: OSSD on<br>LED yellow: Protected area free, system start-ready |
| Pre-fault indicator                         |                | LED orange                                                                                                     |
| Control elements                            |                | switch for start/restart disable, transmission coding                                                          |
| <b>Electrical specifications</b>            |                |                                                                                                                |
| Operating voltage                           | U <sub>B</sub> | 24 V DC (-30 %/+25 %)                                                                                          |
| No-load supply current                      | I <sub>0</sub> | Emitter: ≤ 100 mA receiver: ≤ 150 mA                                                                           |
| Protection class                            |                | III                                                                                                            |
| <b>Input</b>                                |                |                                                                                                                |
| Activation current                          |                | approx. 10 mA                                                                                                  |
| Activation time                             |                | 0.03 ... 1 s                                                                                                   |
| Test input                                  |                | Reset-input for system test (not for option /129)                                                              |
| Function input                              |                | Start release                                                                                                  |
| <b>Output</b>                               |                |                                                                                                                |
| Safety output                               |                | 2 separated fail safe semiconductor outputs                                                                    |
| Signal output                               |                | 1 PNP, max. 100 mA for start readiness                                                                         |
| Switching voltage                           |                | Operating voltage -2 V                                                                                         |
| Switching current                           |                | max. 0.5 A                                                                                                     |
| Response time                               |                | 10 ms                                                                                                          |
| <b>Conformity</b>                           |                |                                                                                                                |
| Functional safety                           |                | ISO 13849-1                                                                                                    |
| Product standard                            |                | EN 61496-1 ; IEC 61496-2                                                                                       |
| <b>Approvals and certificates</b>           |                |                                                                                                                |
| CE conformity                               |                | CE                                                                                                             |
| UL approval                                 |                | cULus Listed                                                                                                   |
| CCC approval                                |                | CCC approval / marking not required for products rated ≤36 V                                                   |
| TÜV approval                                |                | TÜV                                                                                                            |
| <b>Ambient conditions</b>                   |                |                                                                                                                |
| Ambient temperature                         |                | 0 ... 55 °C (32 ... 131 °F)                                                                                    |
| Storage temperature                         |                | -25 ... 70 °C (-13 ... 158 °F)                                                                                 |
| Relative humidity                           |                | max. 95 %, not condensing                                                                                      |
| <b>Mechanical specifications</b>            |                |                                                                                                                |
| Housing length L                            |                | 260 mm                                                                                                         |
| Degree of protection                        |                | IP67                                                                                                           |

Release date: 2020-03-23 Date of issue: 2020-10-06 Filename: 199719\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com


 **PEPPERL+FUCHS**

Technical Data


|                     |  |                                                              |              |
|---------------------|--|--------------------------------------------------------------|--------------|
| Connection          |  | Emitter: M12 connector, 4-pin Receiver: M12 connector, 8-pin |              |
| Material            |  |                                                              |              |
| Housing             |  | extruded aluminum profile, RAL 1021 (yellow) coated          |              |
| Optical face        |  |                                                              | Plastic pane |
| Mass                |  | Per 750 g                                                    |              |
| General information |  |                                                              |              |
| Note                |  | Startup/restart disable preset                               |              |

Connection Assignment


Emitter



Receiver

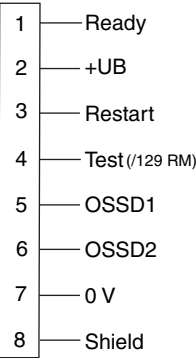

Connection Assignment


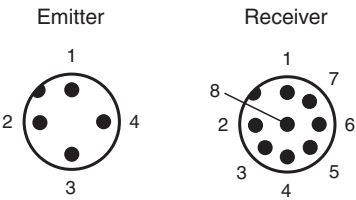


Release date: 2020-03-23 Date of issue: 2020-10-06 Filename: 199719\_eng.pdf

## Characteristic Curve



### Characteristic response curve

SLC14

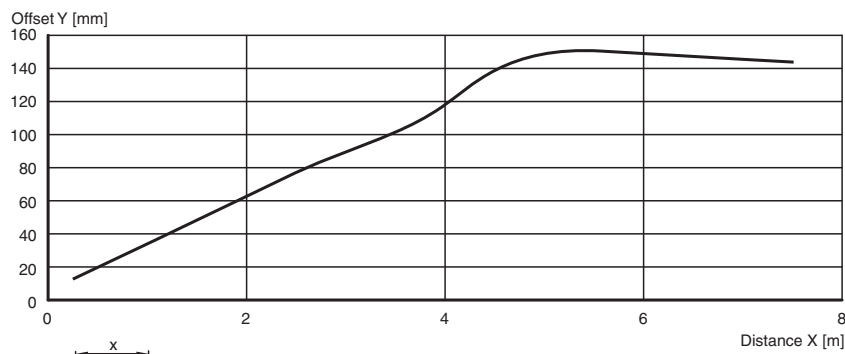



### Relative received light strength

SLC14

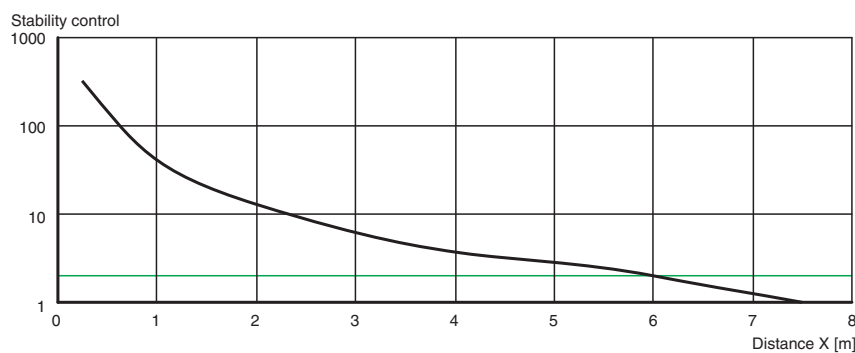

### Lateral interval to mirroring surfaces

SLC14

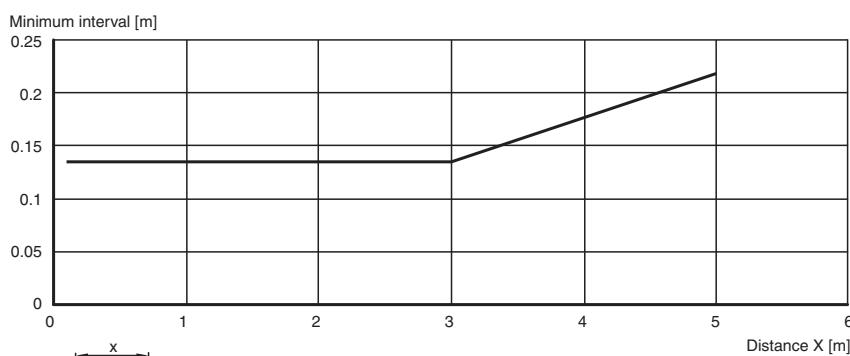

## Matching system components

**SB4-OR-4XP-B-4159**

Safety control unit

**SB4-OR-4XP**

Safety control unit

**SB4-OR-4XP-B**

SB4 series safety control unit with 1 optional module slot for functional enhancement

## Matching system components

|                                                                                     |                             |                                                                                      |
|-------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------|
|    | <b>SB4-OR-4XP-B-B</b>       | SB4 series safety control unit with optional module slots for functional enhancement |
|    | <b>SB4-OR-4XP-B-B-B</b>     | SB4 series safety control unit with optional module slots for functional enhancement |
|    | <b>SB4-OR-4XP-B-B-B-B</b>   | SB4 series safety control unit with optional module slots for functional enhancement |
|    | <b>SB4-OR-4XP-B-B-B-B-B</b> | SB4 series safety control unit with optional module slots for functional enhancement |
|    | <b>SB4-OR-4XP-B-4158</b>    | Safety control unit                                                                  |
|    | <b>SB4-OR-4XP-3819</b>      | Safety control unit                                                                  |
|    | <b>SB4-OR-4XP-4M</b>        | Safety control unit                                                                  |
|    | <b>SB4-OR-4XP-4MD</b>       | Safety control unit                                                                  |
|   | <b>SB4-OR-4XP-4M-4136</b>   | Safety control unit of series SB4                                                    |
|  | <b>SB4-OR-4XP-4X</b>        | Safety control unit                                                                  |
|  | <b>SB4-OR-4XP-4X-3819</b>   | Safety control unit                                                                  |
|  | <b>SB4-OR-4XP-4136</b>      | Safety control unit of series SB4                                                    |

## Accessories

|                                                                                     |                       |                                                          |
|-------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------|
|  | <b>MS SLC</b>         | Mounting bracket for Light grid                          |
|  | <b>PA SLP/SLC</b>     | Alignment aid for SLP and SLC series profile light grids |
|  | <b>PG HOLDER SLC</b>  | Holders for SLC protective glass panes                   |
|  | <b>PG SLC-X</b>       | Protective glass panes for SLC series                    |
|  | <b>PG SLC-150</b>     | Protective glass panes for SLC series                    |
|  | <b>TC SLC ( M16 )</b> | M16 cable gland                                          |
|  | <b>UC SLP/SLC</b>     | Floor stand for all series SLP/SLC devices               |

Accessories

|                                                                                   |                             |                                                                    |
|-----------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------|
|  | <b>UC SLP/SLC 1530 mm</b>   | Floor stand for all series SLP/SLC devices                         |
|  | <b>Damping UC SLP/SLC</b>   | Shock absorber as ramming protector for all series SLP/SLC devices |
|  | <b>Enclosure UC SLP/SLC</b> | Housing for floor stand                                            |

Release date: 2020-03-23 Date of issue: 2020-10-06 Filename: 199719\_eng.pdf

## Notes

### Master slave mode

Master: SLC...-... (semiconductor)  
or  
SLC...-.../31 (relay)  
Slave: SLC...-...-S

Using slaves makes it possible to lengthen protective fields or to form protective fields that lie in more than just one level. When you select slaves that can be connected, you should take into consideration that the maximum number of 96 light rays must not be exceeded.

There are slaves for transmitters and receivers. These may simply be connected to the master light curtain. As many as 2 slaves may be connected respectively to the transmitter and receiver unit.

Installation:

1. The end cap should be screwed off for the light curtain (without cable gland).
2. The plug-in jumper on the connectors of the printed circuit board, which is now visible, should be removed.
3. The slave is designed so that the cap located on the cable connector can be plugged directly onto the open end of the light curtain with the printed circuit board.
4. After you have screwed on the connection cap, the system is complete.

## System accessories

- Mounting set SLC
- Test rods SLC14/SLC30/SLC60
- Protective glass pieces for SLC (to protect the optically functional surface)
- Lateral screwed connection SLC
- Profile alignment aid
- Laser alignment aid SLC
- Mirror for SLC (for securing hazardous areas on multiple sides)
- Ground pillar UC SLP/SLC
- Housing for pillar  
Enclosure UC SLP/SLC
- Collision protector  
Damping UC SLP/SLC