




## Read head WCS2B-LS221H

- RS-485 interface
- Non-contact, absolute position encoder
- Automatic detection of dirt accumulation
- Extended temperature range

Read head, RS-485 interface, with RS-485 termination resistor



### Dimensions

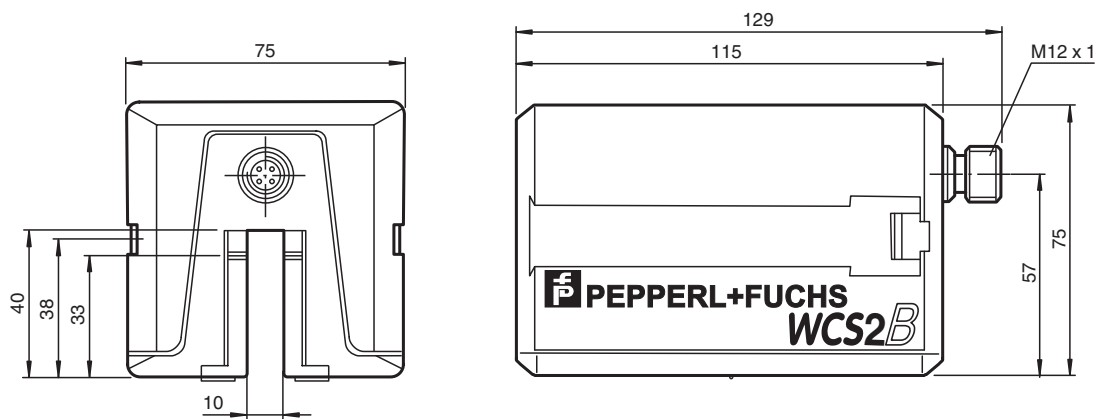

## Dimensions



## Technical Data

### General specifications

|                              |   |                                                            |
|------------------------------|---|------------------------------------------------------------|
| Passage speed                | v | ≤ 12.5 m/s                                                 |
| Measuring range              |   | max. 327 m                                                 |
| Free tolerances to code rail |   | horizontal: 10 mm ( ± 5 mm )<br>vertical: 10 mm ( ± 5 mm ) |
| Resolution                   |   | ± 0.42 mm (1,200 positions/m)                              |

### Functional safety related parameters

|                                |  |      |
|--------------------------------|--|------|
| MTTF <sub>d</sub>              |  | 66 a |
| Mission Time (T <sub>M</sub> ) |  | 10 a |
| Diagnostic Coverage (DC)       |  | 0 %  |

### Electrical specifications

|                   |                |                 |
|-------------------|----------------|-----------------|
| Operating voltage | U <sub>B</sub> | 10 ... 30 V DC  |
| Power consumption | P <sub>0</sub> | 9 VA at 24 V DC |

### Interface

|                  |  |                         |
|------------------|--|-------------------------|
| Interface type   |  | RS 485 interface        |
| Data output code |  | binary code             |
| Protocol         |  | 1 , 2                   |
| Transfer rate    |  | 62.5 kBit/s             |
| Termination      |  | with RS 485 termination |

### Standard conformity

|                      |  |                                                      |
|----------------------|--|------------------------------------------------------|
| Emitted interference |  | DIN EN 61000-6-4                                     |
| Noise immunity       |  | DIN EN 61000-6-2                                     |
| Shock resistance     |  | DIN EN 60068-2-27, half sine 30 g, 18 ms             |
| Vibration resistance |  | DIN EN 60068-2-6, sine, 5 g, 10 - 2000 Hz, 10 cycles |

### Approvals and certificates

|              |  |                                                              |
|--------------|--|--------------------------------------------------------------|
| CSA approval |  | cCSAus Certified, General Purpose<br>Class 2 power source    |
| CCC approval |  | CCC approval / marking not required for products rated ≤36 V |

### Ambient conditions

|                       |  |                                |
|-----------------------|--|--------------------------------|
| Operating temperature |  | -40 ... 60 °C (-40 ... 140 °F) |
|-----------------------|--|--------------------------------|

Release date: 2023-01-09 Date of issue: 2023-01-09 Filename: 200779-0009\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Storage temperature              | -40 ... 85 °C (-40 ... 185 °F)        |
| Relative humidity                | 90 % , noncondensing                  |
| <b>Mechanical specifications</b> |                                       |
| Connection type                  | 5-pin, M12 x 1 connector              |
| Degree of protection             | IP54                                  |
| <b>Material</b>                  |                                       |
| Housing                          | ABS , Polycarbonate , Polyamide (PA)  |
| Mass                             | 500 g                                 |
| <b>General information</b>       |                                       |
| Ordering information             | Mounting plate included with delivery |

Connection

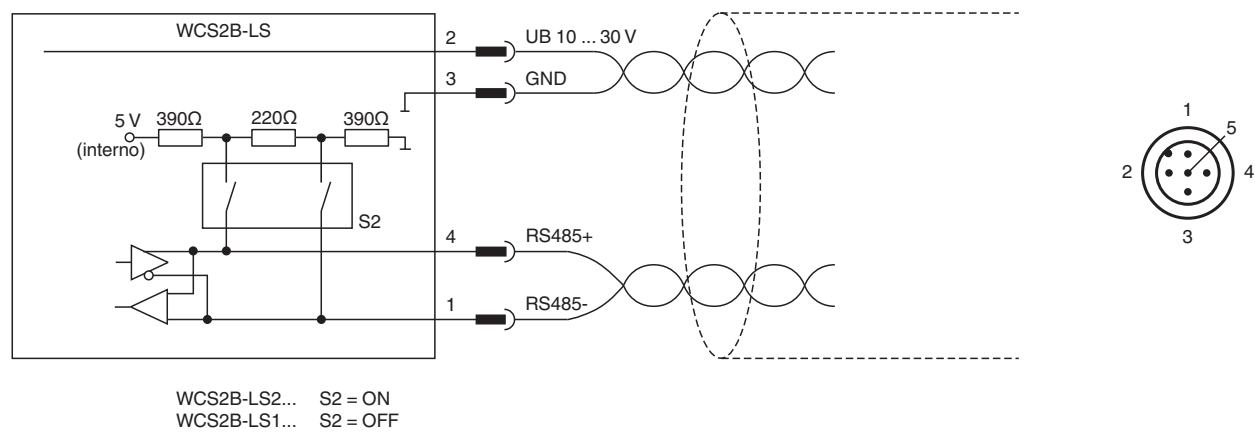

Accessories

|  |                 |                                                      |
|--|-----------------|------------------------------------------------------|
|  | <b>WCS-MP1</b>  | Mounting plate for reading heads WCS2 and WCS3       |
|  | <b>WCS2-PL2</b> | Transparent protective case and seal for WCS2 reader |