



Place Holder Barrier

KCD0-LGH

- K-System place holder module
- Housing width 12.5 mm
- Marshalling for field and control side circuits
- Configurable via plug-in jumpers



Place holder barrier for KC modules



Function

The device is used in cable distribution cables. The device improves accessibility and compactness within a switch cabinet. Different configurations are possible by using wire jumpers. The wire jumpers are located in the device. To configure the device, you have to open the device. In addition, two green replaceable terminals are attached with the device.

Connection

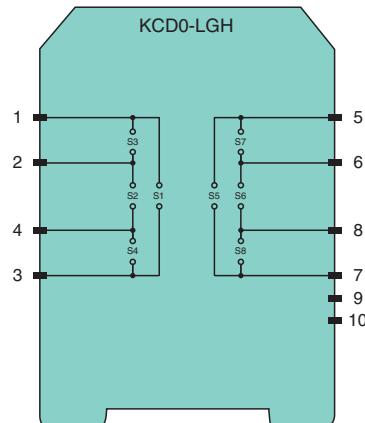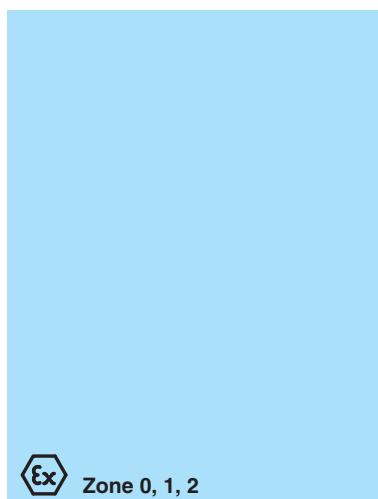

Zone 2

Technical Data

Electrical specifications

Rated voltage U_r ≤ 50 V

Rated current I_r ≤ 2 A

Indicators/settings

Configuration via internal wire jumpers

Labeling space for labeling at the front

Conformity

Degree of protection IEC 60529

Ambient conditions

Ambient temperature $-20 \dots 60$ °C ($-4 \dots 140$ °F)

Mechanical specifications

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Technical Data

Degree of protection	IP20
Connection	screw terminals
Mass	approx. 80 g
Dimensions	12.5 x 114 x 104 mm (0.5 x 4.5 x 4.1 inch) (W x H x D) , housing type A2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas	
Certificate	PF 08 CERT 1214 X
Marking	Ex II 3G Ex nA IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-15:2010
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

