




## Ultrasonic sensor UB1000-18GM75-E6-V15

- 2 switch outputs
- 3 different output functions can be set
- Selectable sound lobe width
- Program input
- Temperature compensation
- Very small unusable area

Single head system



### Dimensions

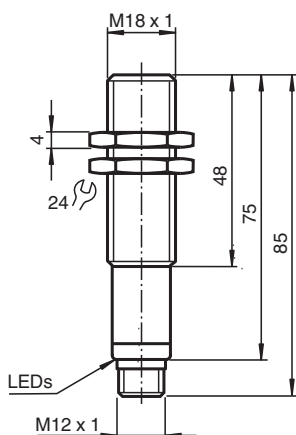

### Technical Data

#### General specifications

|                       |                 |
|-----------------------|-----------------|
| Sensing range         | 70 ... 1000 mm  |
| Adjustment range      | 90 ... 1000 mm  |
| Dead band             | 0 ... 70 mm     |
| Standard target plate | 100 mm x 100 mm |
| Transducer frequency  | approx. 255 kHz |
| Response delay        | approx. 125 ms  |

#### Indicators/operating means


|            |                                                                                 |
|------------|---------------------------------------------------------------------------------|
| LED yellow | indication of the switching state<br>flashing: program function object detected |
|------------|---------------------------------------------------------------------------------|

## Technical Data

|                                          |                                                                      |                                                                                                                                                                 |
|------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LED red                                  | "Error", object uncertain<br>in program function: No object detected |                                                                                                                                                                 |
| Electrical specifications                |                                                                      |                                                                                                                                                                 |
| Operating voltage                        | U <sub>B</sub>                                                       | 10 ... 30 V DC , ripple 10 % <sub>SS</sub>                                                                                                                      |
| No-load supply current                   | I <sub>0</sub>                                                       | ≤ 50 mA                                                                                                                                                         |
| Input                                    |                                                                      |                                                                                                                                                                 |
| Input type                               |                                                                      | 1 program input,<br>operating range 1: -U <sub>B</sub> ... +1 V, operating range 2: +4 V ... +U <sub>B</sub><br>input impedance: > 4.7 kΩ; program pulse: ≥ 1 s |
| Output                                   |                                                                      |                                                                                                                                                                 |
| Output type                              |                                                                      | 2 switch outputs PNP, NO/NC, programmable                                                                                                                       |
| Rated operating current                  | I <sub>e</sub>                                                       | 2 x 100 mA , short-circuit/overload protected                                                                                                                   |
| Voltage drop                             | U <sub>d</sub>                                                       | ≤ 3 V                                                                                                                                                           |
| Repeat accuracy                          |                                                                      | ≤ 1 %                                                                                                                                                           |
| Switching frequency                      | f                                                                    | max. 3 Hz                                                                                                                                                       |
| Range hysteresis                         | H                                                                    | 1 % of the set operating distance                                                                                                                               |
| Temperature influence                    |                                                                      | ± 1.5 % of full-scale value                                                                                                                                     |
| Compliance with standards and directives |                                                                      |                                                                                                                                                                 |
| Standard conformity                      |                                                                      |                                                                                                                                                                 |
| Standards                                |                                                                      | EN IEC 60947-5-2:2020<br>IEC 60947-5-2:2019                                                                                                                     |
| Approvals and certificates               |                                                                      |                                                                                                                                                                 |
| UL approval                              |                                                                      | cULus Listed, Class 2 Power Source                                                                                                                              |
| CCC approval                             |                                                                      | CCC approval / marking not required for products rated ≤36 V                                                                                                    |
| Ambient conditions                       |                                                                      |                                                                                                                                                                 |
| Ambient temperature                      |                                                                      | -25 ... 70 °C (-13 ... 158 °F)                                                                                                                                  |
| Storage temperature                      |                                                                      | -40 ... 85 °C (-40 ... 185 °F)                                                                                                                                  |
| Mechanical specifications                |                                                                      |                                                                                                                                                                 |
| Connection type                          |                                                                      | Connector plug M12 x 1 , 5-pin                                                                                                                                  |
| Housing diameter                         |                                                                      | 18 mm                                                                                                                                                           |
| Degree of protection                     |                                                                      | IP67                                                                                                                                                            |
| Material                                 |                                                                      |                                                                                                                                                                 |
| Housing                                  |                                                                      | brass, nickel-plated                                                                                                                                            |
| Transducer                               |                                                                      | epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT                                                                                           |
| Mass                                     |                                                                      | 60 g                                                                                                                                                            |
| Factory settings                         |                                                                      |                                                                                                                                                                 |
| Output 1                                 |                                                                      | Switching point: 90 mm<br>output function: Switch point operation mode<br>output behavior: NO contact                                                           |
| Output 2                                 |                                                                      | Switching point: 1000 mm<br>output function: Switch point operation mode<br>output behavior: NO contact                                                         |
| Beam width                               |                                                                      | wide                                                                                                                                                            |


## Connection

### Standard symbol/Connections: (version E6, pnp)

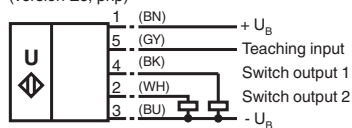

Core colours in accordance with EN 60947-5-2.

Connection Assignment




Wire colors in accordance with EN 60947-5-2


|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |
| 5 | GY | (gray)  |

Characteristic Curve

Characteristic response curve

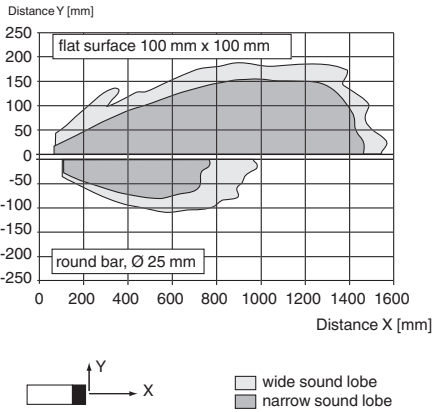

Programmed switching output function

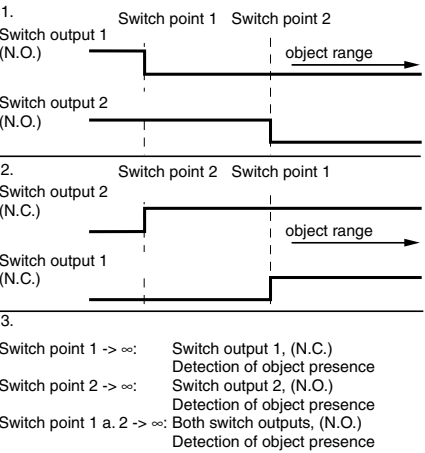

Accessories

|  |                 |                                                               |
|--|-----------------|---------------------------------------------------------------|
|  | <b>UB-PROG3</b> | Programming unit                                              |
|  | <b>OMH-04</b>   | Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm |

## Accessories

|                                                                                   |                     |                                                                                         |
|-----------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------|
|  | <b>BF 18</b>        | Mounting flange, 18 mm                                                                  |
|  | <b>BF 18-F</b>      | Plastic mounting adapter, 18 mm                                                         |
|  | <b>BF 5-30</b>      | Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm       |
|  | <b>UVW90-K18</b>    | Ultrasonic -deflector                                                                   |
|  | <b>M18K-VE</b>      | Plastic nuts with centering ring for the vibration-free mounting of cylindrical sensors |
|  | <b>V15-G-2M-PVC</b> | Female cordset single-ended M12 straight A-coded, 5-pin, PVC cable grey                 |
|  | <b>V15-W-2M-PVC</b> | Female cordset single-ended M12 angled A-coded, 5-pin, PVC cable grey                   |

## Programming

### Programming procedure

The sensor features two programmable switch outputs with one programmable switch point, each. Programming the switch point and the operating mode is done by applying the supply voltage  $-U_B$  or  $+U_B$  to the Program input. The supply voltage must be applied to the Program input for at least 1 s. LEDs indicate whether the sensor has recognized the target during the programming procedure.

#### Note:

Switching points may only be specified directly after Power on. A time lock secures the adjusted switching points against unintended modification 5 minutes after Power on. To modify the switching points later, the user may specify the desired values only after a new Power On.

#### Note:

If a programming adapter UB-PROG3 is used for the programming procedure, button A1 is assigned to  $-U_B$  and button A2 is assigned to  $+U_B$ .

### Programming switch outputs

#### Normally open (NO) output

The switch point of switch output 1 has to be closer to the sensor than the switch point of switch output 2

1. Place the target at the desired switch point position of switch output 1
2. Program the switch point by applying  $-U_B$  to the Program input (corresponding yellow LED flashes)
3. Disconnect the Program input from  $-U_B$  to save the switch point
4. Place the target at the desired switch point position of switch output 2
5. Program the switch point by applying  $+U_B$  to the Program input (corresponding yellow LED flashes)
6. Disconnect the Program input from  $+U_B$  to save the switch point

**Note:** The order doesn't make any difference. If you want, you can set only one switching point.

#### Normally closed (NC) output

The switch point of switch output 2 has to be closer to the sensor than the switch point of switch output 1

1. Place the target at the desired switch point position of switch output 1
2. Program the switch point by applying  $-U_B$  to the Program input (corresponding yellow LED flashes)
3. Disconnect the Program input from  $-U_B$  to save the switch point
4. Place the target at the desired switch point position of switch output 2
5. Program the switch point by applying  $+U_B$  to the Program input (corresponding yellow LED flashes)
6. Disconnect the Program input from  $+U_B$  to save the switch point

**Note:** The order doesn't make any difference. If you want, you can set only one switching point. If both switching points are equal, the sensor works in close function.

### Programming detection of object presence

1. Cover the sensor face with hand or remove all objects from sensing range
2. Apply  $-U_B$  to the Program input (red LED flashes)
3. Disconnect the Program input from  $-U_B$
4. Apply  $+U_B$  to the Program input (red LED flashes)
5. Disconnect the Program input from  $+U_B$

**Note:** Only one switch output can be configured for detection of presence of objects. If the sensor detects an object within the maximum detection range, the switch output switches.

### Adjusting the sound cone characteristics:

The ultrasonic sensor enables two different shapes of the sound cone, a wide angle sound cone and a small angle sound cone.

#### 1. Small angle sound cone

- switch off the power supply
- connect the Teach-In input wire to  $-U_B$
- switch on the power supply
- the red LED flashes once with a pause before the next.
- yellow LED: permanently on: indicates the presence of an object or disturbing object within the sensing range
- disconnect the Teach-In input wire from  $-U_B$  and the changing is saved



#### 2. Wide angle sound cone

- switch off the power supply
- connect the Teach-In input wire with  $+U_B$
- switch on the power supply
- the red LED double-flashes with a long pause before the next.
- yellow LED: permanently on: indicates an object or disturbing object within the sensing range
- disconnect the Teach-In input wire from  $+U_B$  and the changing is saved



## Factory Setting

**Factory settings**

See technical data.

**Indication**

The sensor provides LEDs to indicate various conditions.

|                                        | Red LED | Yellow LED 1                 | Yellow LED 2                 |
|----------------------------------------|---------|------------------------------|------------------------------|
| <b>During Normal operation</b>         |         |                              |                              |
| Proper operation                       | Off     | Switching state<br>output 1  | Switching state<br>output 2  |
| Interference (e.g. compressed air)     | On      | remains in previous<br>state | remains in previous<br>state |
| <b>Programming of output 1</b>         |         |                              |                              |
| Object detected                        | Off     | Flashes                      | Off                          |
| No object detected                     | Flashes | Off                          | Off                          |
| Object uncertain (programming invalid) | On      | Off                          | Off                          |
| <b>Programming of output 2</b>         |         |                              |                              |
| Object detected                        | Off     | Off                          | Flashes                      |
| No object detected                     | Flashes | Off                          | Off                          |
| Object uncertain (programming invalid) | On      | Off                          | Off                          |

**Installation Conditions**

If the sensor is installed at places, where the environment temperature can fall below 0 °C, for the sensors fixation, one of the mounting flanges BF18, BF18-F or BF 5-30 must be used.

In case of direct mounting of the sensor in a through hole using the steel nuts, it has to be fixed at the middle of the housing thread. If a fixation at the front end of the threaded housing is required, plastic nuts with centering ring (accessories) must be used.