




Background suppression sensor ML4.2-8-H-20-RT/40b/95/110/130



- Precise background suppression
- Very small black-white difference
- Small, sharp light spot
- Metal-reinforced fastening holes
- Tamper-proof version with no adjustments
- Short response time
- Push-pull output


Triangulation sensor with background suppression for complex applications, miniature design, 20 mm detection range, red light, light/dark on, reduced response time, push-pull output, M8 plug



Function

The ML100 series is characterized by its miniature housing with integral, all-metal threaded bushings. All versions are equipped with a visible red transmitter LED. This greatly simplifies installation and commissioning. The switching states are easily visible from all directions thanks to the highly visible LEDs.

Dimensions

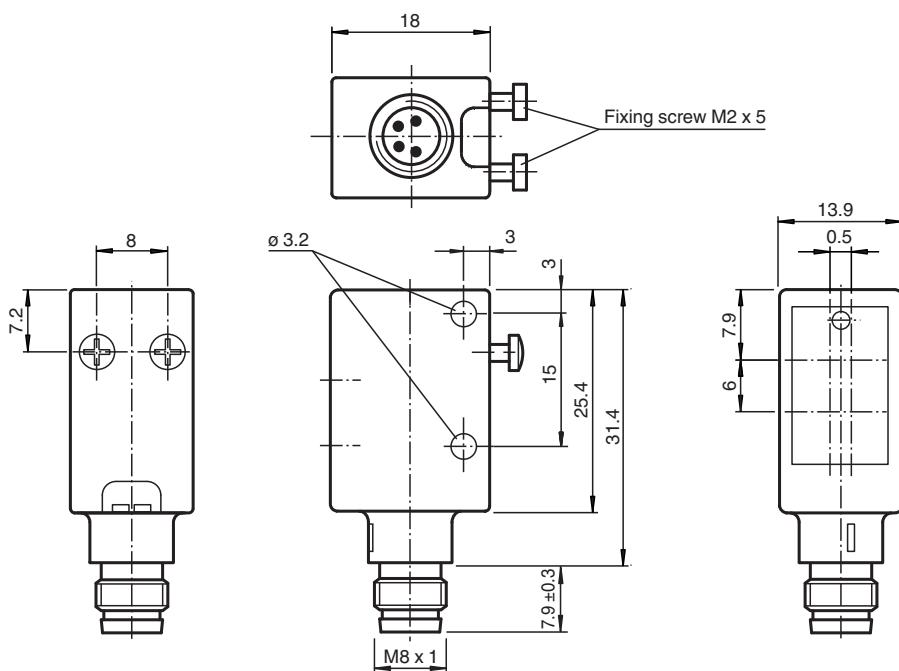

Technical Data

General specifications		
Detection range	7 ... 20 mm	
Detection range max.	5 ... 25 mm	
Background suppression	starts from 25 mm	
Light source	LED	
Light type	modulated visible red light , 660 nm	
Black-white difference (6 %/90 %)	approx. 1 mm	
Diameter of the light spot	approx. 1.5 mm at 20 mm	
Angle of divergence	approx. 5 °	
Ambient light limit		
Continuous light	40000 Lux	
Modulated light	5000 Lux	
Functional safety related parameters		
MTTF _d	1940 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	0 %	
Indicators/operating means		
Operation indicator	LED green, statically lit Power on , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz)	
Function indicator	LED yellow: lights when object is detected	
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Ripple		10 %
No-load supply current	I ₀	< 25 mA
Output		
Switching type		light/dark on electrically switchable
Signal output		Push-pull output, short-circuit protected, reverse polarity protected
Switching voltage		max. 30 V DC
Switching current		max. 100 mA
Voltage drop	U _d	≤ 2.5 V DC
Switching frequency	f	2000 Hz
Response time		250 µs
Conformity		
Product standard	EN 60947-5-2	
Compliance with standards and directives		
Standard conformity		
Shock and impact resistance	IEC / EN 60068. half-sine, 40 g in each X, Y and Z directions	
Vibration resistance	IEC / EN 60068-2-6. Sinus. 10 -150 Hz, 5 g in each X, Y and Z directions	
Approvals and certificates		
CE conformity	yes	
UL approval	cULus Listed	
CCC approval	CCC approval / marking not required for products rated ≤36 V	
Ambient conditions		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
Storage temperature	-20 ... 75 °C (-4 ... 167 °F)	
Mechanical specifications		
Housing width	13.9 mm	
Housing height	31.4 mm	
Housing depth	18 mm	
Degree of protection	IP67 / IP69K	
Connection	M8 x 1 connector, 4-pin	
Material		
Housing	ABS	

Technical Data


Optical face

glass pane

Mass

approx. 10 g

Connection Assignment

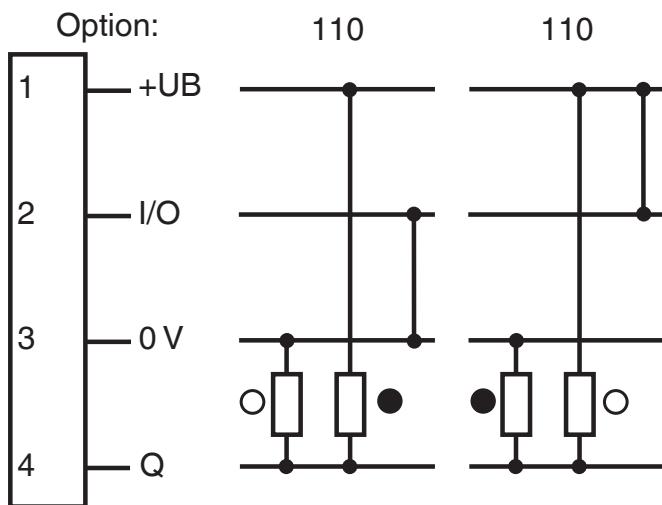

○ = Light on
 ● = Dark on


Connection Assignment



Wire colors in accordance with EN 60947-5-2


1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Assembly

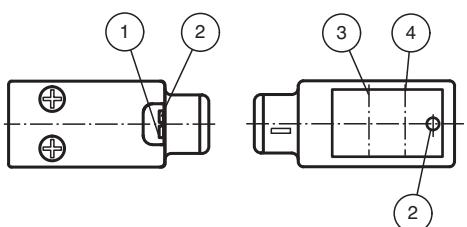


1	operating display	green
2	indication of the switching state	yellow
3	receiver axis	
4	emitter axis	

Characteristic Curve

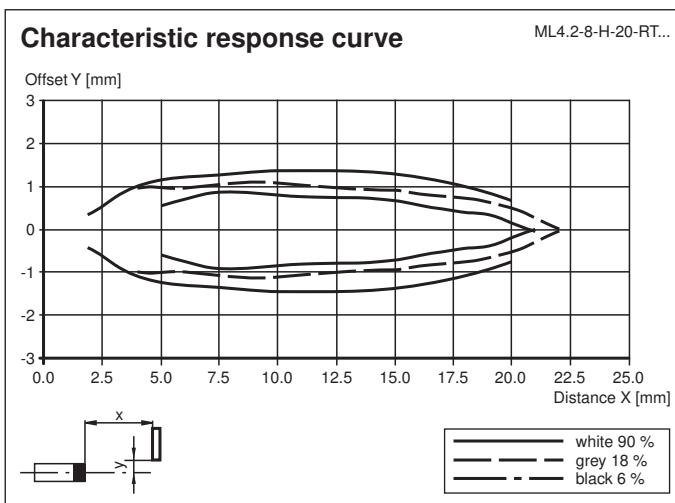

Detection ranges

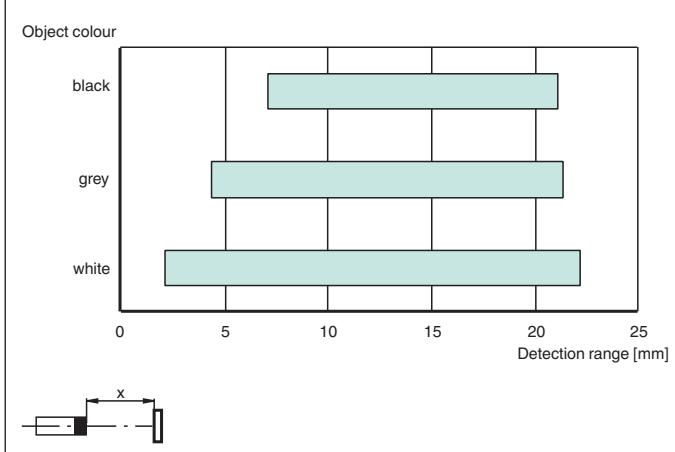

Accessories

	OMH-4.1	Mounting Clamp
	OMH-ML6	Mounting bracket
	OMH-ML6-U	Mounting bracket
	OMH-ML6-Z	Mounting bracket
	V31-GM-2M-PVC	Female cordset single-ended M8 straight A-coded, 4-pin, PVC cable grey
	V31-WM-2M-PVC	Female cordset single-ended M8 angled A-coded, 4-pin, PVC cable grey