

((

Model number

VAZ-IM1-TD-RADIUS-BOLT-S

Hinged actuator for top/bottom mounted doors, for AS-Interface safety switches


Features

 Spring-mounted actuator for radii > 100 mm

Function

The hinged actuator VAZ-IM1-TD-RADIUS-BOLT-S is intended for use on top or bottom-mounted doors with door radius between 200 mm and 1000 mm. Damage on the actuating head caused by jamming is prevented by the spring actuator. The Niro safety screws, which are included in the scope of supply, can be screwed in with a normal tool and prevent unscrewing.

Dimensions

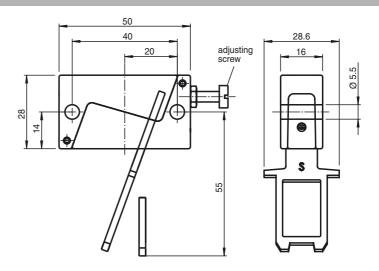

Technical data		
Mechanical specifications		
Material		stainless steel
Mounting screw		stainless steel
door radius	r	200 1000 mm
door stop		top/bottom
caster		5 mm
General information		
Scope of delivery		1 hinged actuator, For top and bottom mounted doors 2 safety screws, stainless steel M5 x 25