



Y-Splitter


V31S-YEE-V31

- Parallel distributor for bus connection (all pins bridged)
- Degree of protection IP67
- UL listed for USA and Canada
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Y-Splitter M8 plug 4-pin to 2x M8 socket 4-pin, UL approved



Dimensions

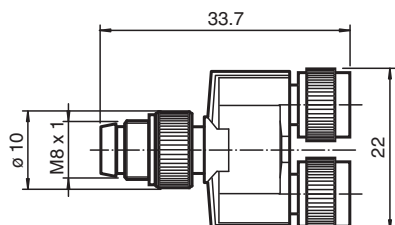

Technical Data

General specifications

Connector 1		
Connection		socket
Construction type		M8
Style		straight
Locking		screw connection
Number of pins		4
Coding		A-coded
Connector 2		
Connection		socket
Construction type		M8
Style		straight
Locking		screw connection
Number of pins		4
Coding		A-coded
Connector 3		
Connection		plug
Construction type		M8
Style		straight
Locking		screw connection
Number of pins		4
Coding		A-coded

Electrical specifications

Operating voltage	U _B	max. 30 V AC/DC
-------------------	----------------	-----------------

Release date: 2024-04-18 Date of issue: 2024-04-18 Filename: 211524_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Operating current	I _B	max. 4 A
Conformity		
Degree of protection		EN 60529
Plug connection		connector M8 x 1 : IEC 61076-2-104
Approvals and certificates		
UL File Number		E231213
Ambient conditions		
Ambient temperature		-25 ... 90 °C (-13 ... 194 °F)
Pollution degree		3
Mechanical specifications		
Plug connector		
Tightening torque		0.2 Nm
Loosening protection		available
Tool installation		straight knurling
Mating cycles		min. 100
Degree of protection		IP65/IP67
Mass		9 g
Material		
Plug connector		
Body		TPU, black
Seal		NBR
Contact surface		Ni/Au
Flammability		HB

Connection Assignment

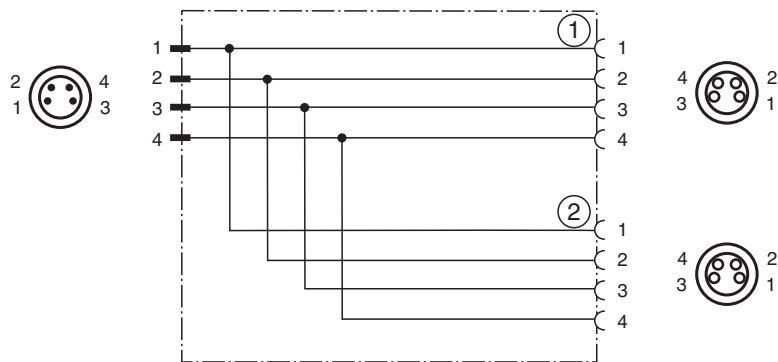

Release date: 2024-04-18 Date of issue: 2024-04-18 Filename: 211524_eng.pdf