

RFID Transponder

IQC21-85-T13




- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- Degree of protection IP68 / IP69K
- With extended temperature range up to 220 °C (428 °F)
- Mounting holes for simple installation

Data carrier



Dimensions

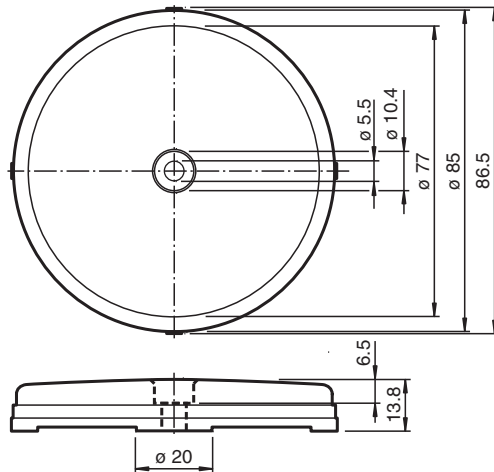

Technical Data

General specifications		
Operating frequency		13.56 MHz
Transfer rate		26 kBit/s
Memory		
Chip Type		I-CODE SLI (NXP)
EEPROM		896 Bit
UID		64 Bit
Memory organization		4 bytes/block
Read cycles		unlimited
Write cycles		> 1000000 at 40 °C
Data retention period		10 years at 55 °C (131 °F)
Directive conformity		
Radio equipment		
Directive 2014/53/EU		EN 300330
RoHS		
Directive 2011/65/EU (RoHS)		IEC/EN 63000
Standard conformity		

Release date: 2022-12-15 Date of issue: 2022-12-15 Filename: 212335_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Degree of protection	EN 60529
Shock resistance	EN 60721-3-7 Class 7M3
RFID	ISO/IEC 15693-1 ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3
Ambient conditions	
Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)
Storage temperature	-40 ... 100 °C (-40 ... 212 °F) 200 °C (473 K) for 5000 hours or 3000 cycles 220 °C (493 K) for 2000 hours or 1500 cycles
Shock and impact resistance	Vibration: 20 g Shock: 50 g
Mechanical specifications	
Housing height	15 mm
Housing diameter	85 mm
Degree of protection	IP68 / IP69K
Material	PPS
Installation	
In air	yes
Mass	approx. 50 g
Construction type	Cylindrical

Reading range in air IQC21-85-T13

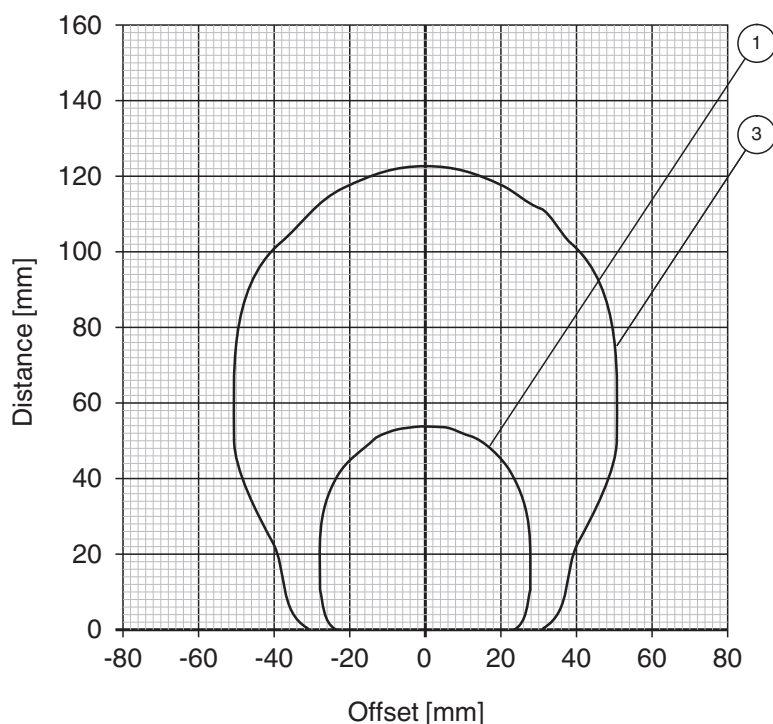

- ① IQH1-18GM-V1
- ② IQH1-F61-V1
- ③ IQH1-FP-V1
- ④ IQH1-F15-V1

Accessories

	IQZ-MH-85	Spacers for code/data carrier
---	------------------	-------------------------------

Release date: 2022-12-15 Date of issue: 2022-12-15 Filename: 212335_eng.pdf

Mounting

A central M5 mounting screw is used to fix the holder. A metal screw can be used without significantly affecting the maximum range. Use a stainless steel screw at high temperatures.

To prevent damage as a result of high temperatures, an additional spacer should be used.

High temperatures (> 80 °C) will cause the enclosure to expand. If the enclosure is assembled under mechanical stress, the resulting pressure may damage the data carrier. The enclosure must be assembled loosely, taking into account the expansion coefficients of all materials.

Reading and writing is not possible at ambient temperatures above 140 °C.

Release date: 2022-12-15 Date of issue: 2022-12-15 Filename: 212335_eng.pdf