

Connection cable

V3-WM-2M-PUR-V3-GM




- Degree of protection IP68
- Resistant to microbes and hydrolysis
- Halogen-free
- Specific design protects against loosening and inaccurate installation

Cordset M8 socket angled to M8 plug straight A-coded, 3-pin, PUR cable grey



Dimensions

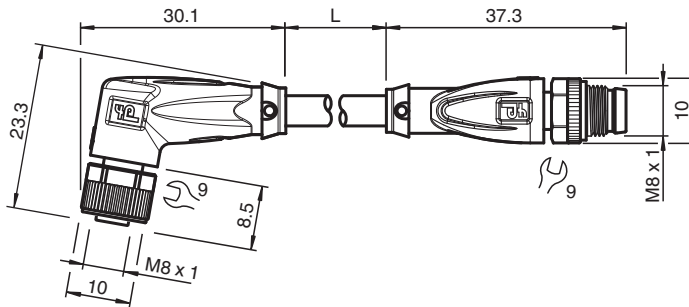

Technical Data

General specifications

Connector 1		
Connection		socket
Construction type		M8
Style		angled
Locking		screw connection
Number of pins		3
Coding		A-coded
Connector 2		
Connection		plug
Construction type		M8
Style		straight
Locking		screw connection
Number of pins		3
Coding		A-coded

Electrical specifications

Operating voltage	U_B	max. 48 V AC / 60 V DC
Operating current	I_B	max. 3 A

Conformity

Degree of protection		EN 60529
Plug connection		connector M8 x 1 : IEC 61076-2-104
Halogen-free		IEC 60754-1

Release date: 2023-06-19 Date of issue: 2023-06-19 Filename: 212979_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Ambient conditions

Ambient temperature

Plug connector	-40 ... 90 °C (-40 ... 194 °F)
Cable, fixed	-40 ... 80 °C (-40 ... 176 °F)
Cable, flexing	-20 ... 80 °C (-4 ... 176 °F)

Pollution degree	3
------------------	---

Mechanical specifications

Plug connector

Tightening torque	0.4 Nm
Loosening protection	available
Tool installation	straight knurling and hexagon nut SW = 9 mm

Mating cycles	min. 100
---------------	----------

Degree of protection	IP68
----------------------	------

Cable	according to IEC/EN 60228 (DIN VDE 0295) class 5
-------	--

Sheath diameter	4.3 mm
-----------------	--------

Bending radius	> 15 x cable diameter, moving > 8 x cable diameter, fixed
----------------	--

Sheath stripping force	max. 80 N / 500 mm
------------------------	--------------------

Sheath color	grey (similar to RAL 7001)
--------------	----------------------------

Number of cores	3
-----------------	---

Core cross section	0.25 mm ²
--------------------	----------------------

Cores color	Core 1: brown Core 3: blue Core 4: black
-------------	--

Core construction	14 x 0.15 mm Ø
-------------------	----------------

Length	L	2 m
--------	---	-----

Cable code	Li 9Y 11Y 3 x 0,25
------------	--------------------

Drag chain suitability	
------------------------	--

Drag chain cycles	max. 50 / day
-------------------	---------------

Motion velocity	max. 0.3 m/s
-----------------	--------------

Material

Halogen-free	yes
--------------	-----


Plug connector

Screw connection	Zinc diecast, nickel-plated
Body	TPU, black
Seal	FKM
Contact surface	gold plated (Au)
Flammability	V-2

Cable

Sheathing	PUR based on polyether
Core insulation	PP
Chemical resistance	good
Microbial resistance	yes
Hydrolysis resistance	yes

Connection



Accessories

	MH V3-SCREWDRIVER	Torque screwdriver (0.4 Nm)
	MH V3-BIT M8	plug-in cap for M8
	V1/V3-LABELHOLDER	Label holder
	V1/V3-LABEL	Label plate
	MH V3-Holder	Modular universal holder for M8 connectors