



## Switch Amplifier KCD2-SOT-1.LB


- 1-channel signal conditioner
- 24 V DC supply (Power Rail)
- Dry contact or NAMUR input
- 2 passive transistor outputs
- Usable as signal splitter (1 input and 2 outputs)
- Reversible mode of operation
- Line fault detection (LFD)
- Housing width 12.5 mm
- Up to SIL 2 (SC 3) acc. to IEC/EN 61508

# CE SIL 2

### Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. The device transfers digital signals (NAMUR sensors or dry contacts) from the field to the control system. The input controls two passive transistor outputs. Via switches the mode of operation can be reversed and the line fault detection can be switched off. Via switch the function of the second output can be defined as a signal output or an error output. A fault is signaled by LEDs acc. to NAMUR NE44 and a separate collective error message output.

### Connection

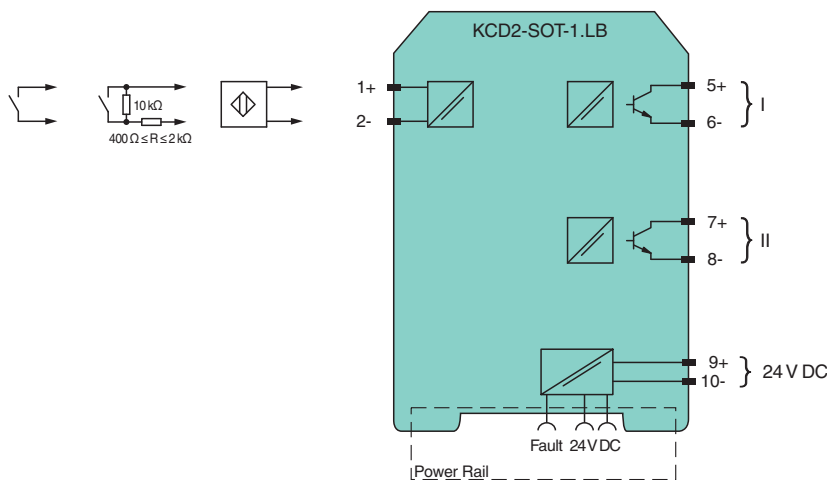

### Technical Data

#### General specifications

|             |               |
|-------------|---------------|
| Signal type | Digital Input |
|-------------|---------------|

#### Functional safety related parameters

|                              |       |
|------------------------------|-------|
| Safety Integrity Level (SIL) | SIL 2 |
| Systematic capability (SC)   | SC 3  |

#### Supply

|                   |                                                                 |
|-------------------|-----------------------------------------------------------------|
| Connection        | Power Rail or terminals 9+, 10-                                 |
| Rated voltage     | $U_r$ 19 ... 30 V DC                                            |
| Ripple            | $\leq 10 \%$                                                    |
| Rated current     | $I_r$ 20 ... 15 mA                                              |
| Power dissipation | $\leq 700$ mW including maximum power dissipation in the output |

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

### Input

|                                            |  |                                                          |
|--------------------------------------------|--|----------------------------------------------------------|
| Connection side                            |  | field side                                               |
| Connection                                 |  | terminals 1+, 2-                                         |
| Rated values                               |  | acc. to EN 60947-5-6 (NAMUR)                             |
| Open circuit voltage/short-circuit current |  | approx. 10 V DC / approx. 8 mA                           |
| Switching point/switching hysteresis       |  | 1.2 ... 2.1 mA / approx. 0.2 mA                          |
| Line fault detection                       |  | breakage $I \leq 0.1$ mA , short-circuit $I \geq 6.5$ mA |
| Pulse/Pause ratio                          |  | min. 100 $\mu$ s / min. 100 $\mu$ s                      |

### Output

|                          |       |                                                                                                                     |
|--------------------------|-------|---------------------------------------------------------------------------------------------------------------------|
| Connection side          |       | control side                                                                                                        |
| Connection               |       | output I: terminals 5, 6 ; output II: terminals 7, 8                                                                |
| Rated voltage            | $U_r$ | 30 V DC                                                                                                             |
| Rated current            | $I_r$ | 50 mA                                                                                                               |
| Response time            |       | $\leq 200$ $\mu$ s                                                                                                  |
| Signal level             |       | 1-signal: (external voltage) - 3 V max. for 50 mA<br>0-signal: blocked output (off-state current $\leq 10$ $\mu$ A) |
| Output I                 |       | signal ; Transistor                                                                                                 |
| Output II                |       | signal or fault message ; Transistor                                                                                |
| Collective error message |       | Power Rail                                                                                                          |

### Transfer characteristics

|                     |  |              |
|---------------------|--|--------------|
| Switching frequency |  | $\leq 5$ kHz |
|---------------------|--|--------------|

### Galvanic isolation

|                     |  |                                                                                       |
|---------------------|--|---------------------------------------------------------------------------------------|
| Input/Output        |  | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub> |
| Input/power supply  |  | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub> |
| Output/power supply |  | basic insulation according to EN 50178, rated insulation voltage 50 V <sub>eff</sub>  |
| Output/Output       |  | basic insulation according to EN 50178, rated insulation voltage 50 V <sub>eff</sub>  |

### Indicators/settings

|                  |  |                                 |
|------------------|--|---------------------------------|
| Display elements |  | LEDs                            |
| Control elements |  | DIP switch                      |
| Configuration    |  | via DIP switches                |
| Labeling         |  | space for labeling at the front |

### Directive conformity

|                               |  |                                        |
|-------------------------------|--|----------------------------------------|
| Electromagnetic compatibility |  |                                        |
| Directive 2014/30/EU          |  | EN 61326-1:2013 (industrial locations) |

### Conformity

|                                     |  |                   |
|-------------------------------------|--|-------------------|
| Electromagnetic compatibility       |  | NE 21:2011        |
| Degree of protection                |  | IEC 60529:2001    |
| Protection against electrical shock |  | IEC 61010-1:2010  |
| Input                               |  | EN 60947-5-6:2000 |

### Ambient conditions

|                     |  |                                                                                                                                                                           |
|---------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature |  | -20 ... 60 °C (-4 ... 140 °F)<br>extended ambient temperature range up to 70 °C (158 °F) , refer to manual and derating characteristics for necessary mounting conditions |
|---------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


### Mechanical specifications

|                      |  |                                                                          |
|----------------------|--|--------------------------------------------------------------------------|
| Degree of protection |  | IP20                                                                     |
| Connection           |  | screw terminals                                                          |
| Mass                 |  | approx. 100 g                                                            |
| Dimensions           |  | 12.5 x 119 x 114 mm (0.5 x 4.7 x 4.5 inch) (W x H x D) , housing type A2 |
| Mounting             |  | on 35 mm DIN mounting rail acc. to EN 60715:2001                         |

### General information


|                           |  |                                                                                                                                                                                                 |
|---------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supplementary information |  | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> . |
|---------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Assembly

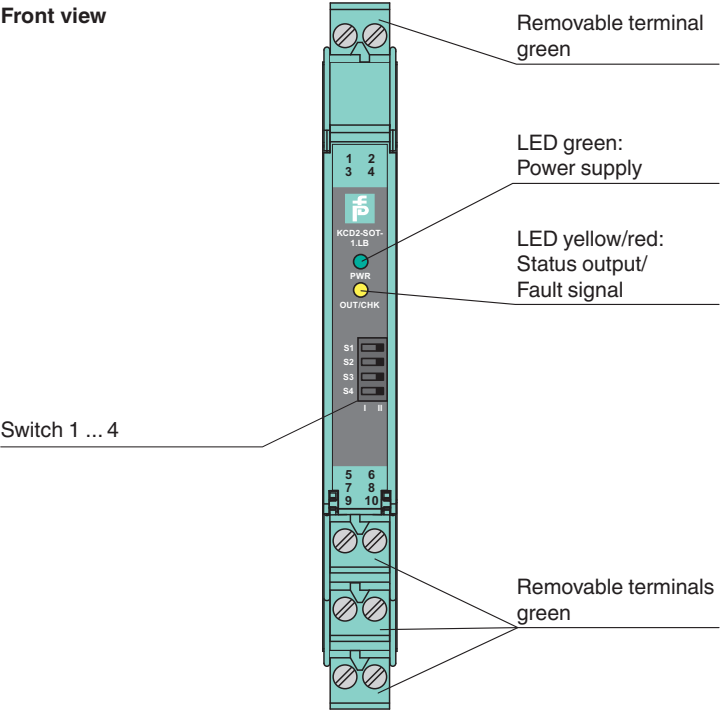

Release date: 2025-02-17 Date of issue: 2025-02-17 Filename: 214246\_eng.pdf

Configuration

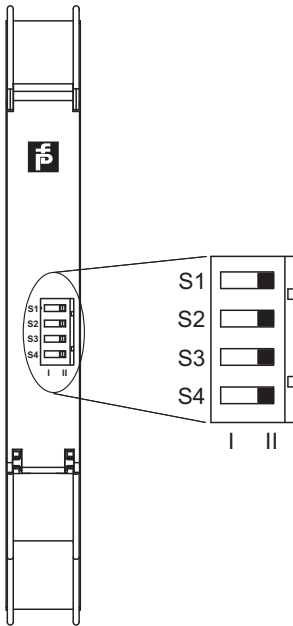

Switch settings

| S | Function                            |                                            | Position |
|---|-------------------------------------|--------------------------------------------|----------|
| 1 | Mode of operation output I (active) | with high input current                    | I        |
|   |                                     | with low input current                     | II       |
| 2 | Assignment output II                | Switching state like output I              | I        |
|   |                                     | Fault indication output (passive if fault) | II       |
| 3 | Line fault detection of the input   | ON                                         | I        |
|   |                                     | OFF                                        | II       |
| 4 | no function                         |                                            |          |


Operating states

| Control circuit                         | Input signal       |
|-----------------------------------------|--------------------|
| Initiator high impedance/contact opened | low input current  |
| Initiator low impedance/contact closed  | high input current |
| Lead breakage, lead short circuit       | Line fault         |

Factory setting: switch 1, 2, 3 and 4 in position I

Characteristic Curve

Derating of the rated current  $I_r$  at the output

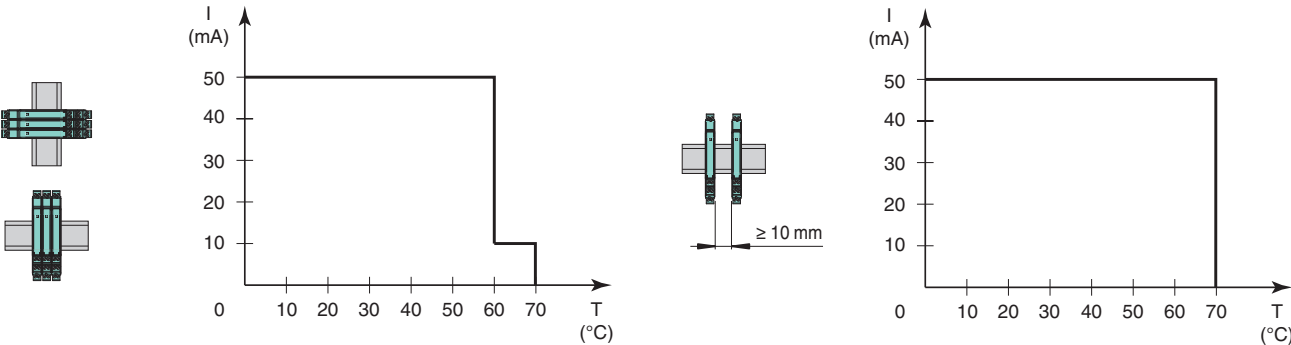

- Horizontal or vertical mounting
- without separation distance
  - with the same device type

- Horizontal mounting
- with separation distance
  - with different device types