



Terminal Block with Test Plug Socket KF-CTT-3GN2BU


- 3-pin spring terminal with push-in connection technology
- For KF modules of K-System
- Integrated test sockets for connection of HART communicators
- Packaging unit: 3 pieces green, 2 pieces blue

Terminal block for KF modules, 3-pin spring terminal, with test sockets

Function

The terminal block is suitable for KSystem applications.
The blue terminal block is used for connection of signals from or in the hazardous area.
This terminal block has integrated test sockets for connection of HART communicators.
The terminal block can be coded with the provided coding pins KF-CP.

Dimensions

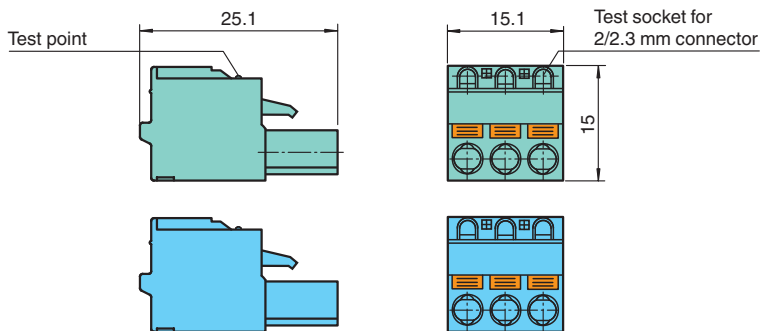

Technical Data

General specifications	
Number of pins	3
Mechanical specifications	
Core cross section	max. 2.5 mm ²
Material	
Color	blue , green
Mass	approx. 5 g
Dimensions	15.1 x 15 x 25.1 mm (0.6 x 0.6 x 1 inch)
Construction type	spring terminal with integrated test sockets , removable
Structure	one-rowed
General information	
Packing unit	5 item(s)

Release date: 2023-05-31 Date of issue: 2023-05-31 Filename: 215332_eng.pdf

Safety Information

The insulation of the removable terminal blocks protect against direct contact. The insulation conforms to a reinforced insulation acc. to EN 50178 with a rated insulation voltage of 50 V AC.

If the rated voltage greater than 50 V AC, proceed as follows:

- Switch off the voltage.
- Connect the terminal blocks or disconnect the terminal blocks.