

Terminal Block with Test Plug Socket KF-CTT-5BU




- 3-pin spring terminal with push-in connection technology
- For KF modules of K-System
- Integrated test sockets for connection of HART communicators
- Packaging unit: 5 pieces blue

Terminal block for KF modules, 3-pin spring terminal, with test sockets, blue

Function

The terminal block is suitable for KSystem applications.
The blue terminal block is used for connection of signals from or in the hazardous area.
This terminal block has integrated test sockets for connection of HART communicators.
The terminal block can be coded with the provided coding pins KF-CP.

Dimensions

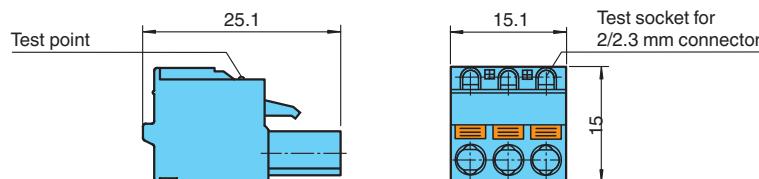

Technical Data

Release date: 2023-05-31 | Date of issue: 2023-05-31 | Filename: 215333_eng.pdf

General specifications

| | |
|----------------|---|
| Number of pins | 3 |
|----------------|---|

Mechanical specifications

| | |
|--------------------|--|
| Core cross section | max. 2.5 mm ² |
| Material | |
| Color | blue |
| Mass | approx. 5 g |
| Dimensions | 15.1 x 15 x 25.1 mm (0.6 x 0.6 x 1 inch) |
| Construction type | spring terminal with integrated test sockets , removable |
| Structure | one-rowed |

General information

| | |
|--------------|-----------|
| Packing unit | 5 item(s) |
|--------------|-----------|

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Safety Information

The insulation of the removable terminal blocks protect against direct contact. The insulation conforms to a reinforced insulation acc. to EN 50178 with a rated insulation voltage of 50 V AC.

If the rated voltage greater than 50 V AC, proceed as follows:

- Switch off the voltage.
- Connect the terminal blocks or disconnect the terminal blocks.