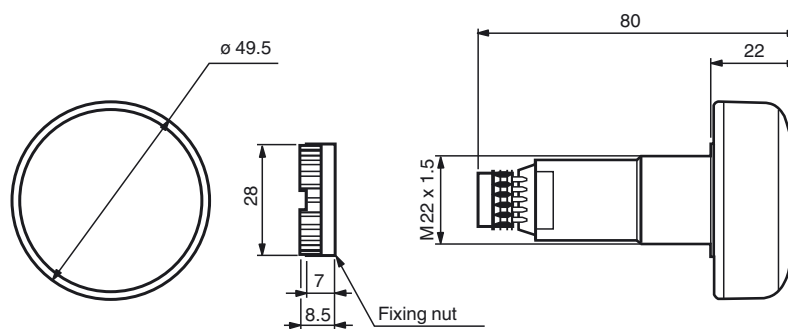


**Model number****VAZ-BUZZER/LT-RD**

buzzer element with acknowledgment

**Features**

- Good all-round visibility
- Shrill, continuous tone, with 80 dB
- Long service life due to long-lasting LEDs
- Simple connection via screw terminal
- splash and dust resistant
- Degree of protection: IP 65
- Acknowledge/silence the audible signal by lightly pressing the frontal area

**Dimensions****Technical data****General specifications**

UL File Number	E223176
Color	red
Frequency	2.8 kHz Continuous signal
Loudness	80 dB

**Indicators/operating means**

LED red	active
---------	--------

**Electrical specifications**

Rated operating voltage	$U_e$	24 V DC
Rated operating current	$I_e$	≤ 80 mA
Inrush current		< 500 mA

**Ambient conditions**

Ambient temperature	-20 ... 50 °C (-4 ... 122 °F)
---------------------	-------------------------------

**Mechanical specifications**

Protection degree	IP65
Connection	plug-in screw terminals Wire cross section: ≤1.5 mm <sup>2</sup> fine-strand
Material	PC/ABS
Mass	40 g
Life span	50000 h (Acoustic: min. 5000 h)

**Compliance with standards and directives**

<b>Directive conformity</b>	
EMC Directive 2004/108/EC	EN 60947-5-1:2005 EN 60947-1:2007
<b>Standard conformity</b>	
Protection degree	EN 60529:2000