




- Sturdy metallic version
- Chemical-resistant

Dimensions

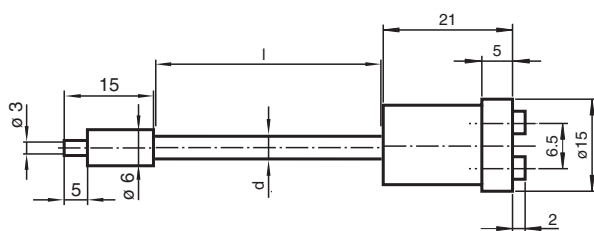

Technical Data

Fiber optic length	l	5000 mm
Fiber optic diameter	d	5 mm
Adapter form		18
End piece		Cylindrical
Bending radius		min. 20 mm
Fiber bundle diameter		1.6 mm
Fiber configuration	Fv	optical seperated
Angle of divergence		68 °

Approvals	CE
-----------	----

Ambient temperature	-20 ... 85 °C (-4 ... 185 °F) [Adapter] -50 ... 200 °C (-58 ... 392 °F) [End head and Covering]
Storage temperature	-20 ... 85 °C (-4 ... 185 °F)

Degree of protection	IP40
----------------------	------

Technical Data

Material		
Optical face		glass
Sheathing		metal
Core		Glass fiber
End piece		Stainless steel 1.4305 / AISI 303
Adapter		PBT
Extraction force		120 N
Fiber optic amplifiers		
Device series		VL18LL VariKont M

Application

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.

