



Solenoid Driver KCD0-SD-Ex1.1245


- 1-channel isolated barrier
- 24 V DC supply (loop powered)
- Current limit 45 mA at 12 V DC
- Housing width 12.5 mm
- Up to SIL 3 acc. to IEC/EN 61508



Function

This isolated barrier is used for intrinsic safety applications. The device supplies power to solenoids, LEDs and audible alarms located in a hazardous area. The device is loop powered, so the available energy at the output is received from the input signal. The output signal has a resistive characteristic. As a result the output voltage and current are dependent on the load and the input voltage. At full load, 12 V at 45 mA is available for the hazardous area application.

Connection

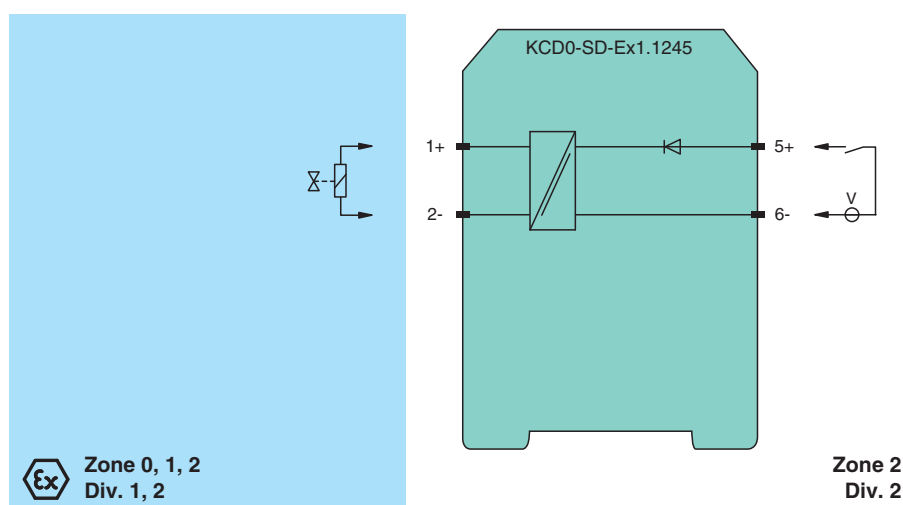

Technical Data

General specifications

Signal type	Digital Output
-------------	----------------

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
------------------------------	-------

Supply

Rated voltage	U_r	loop powered
Power dissipation		< 1 W

Input

Connection side		control side
Connection		terminals 5, 6
Rated voltage	U _r	19 ... 30 V DC

Release date: 2022-01-17 Date of issue: 2022-01-17 Filename: 233601_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Current		$\leq 72 \text{ mA}$ at $U_i = 19 \text{ V}$, $\leq 50 \text{ mA}$ at $U_i = 30 \text{ V}$ with 265Ω output load $\leq 45 \text{ mA}$ at $U_i = 19 \text{ V}$, $\leq 31 \text{ mA}$ at $U_i = 30 \text{ V}$ with shorted output $\leq 14 \text{ mA}$ at $U_i = 19 \text{ V}$, $\leq 11 \text{ mA}$ at $U_i = 30 \text{ V}$ no load at output
Inrush current		$\leq 200 \text{ mA}$ after $100 \mu\text{s}$
Output		
Connection side		field side
Connection		terminals 1+, 2-
Internal resistor	R_i	$\leq 238 \Omega$
Current	I_e	$\leq 45 \text{ mA}$
Voltage	U_e	$\geq 12 \text{ V}$
Open loop voltage	U_s	$\geq 22.7 \text{ V}$
Output rated operating current		45 mA
Output signal		These values are valid for the rated operating voltage $19 \dots 30 \text{ V DC}$.
Energized/De-energized delay		single operation: typ. $1.7 \text{ ms}/50 \mu\text{s}$; periodical: typ. $5 \mu\text{s}/50 \mu\text{s}$
Galvanic isolation		
Input/Output		reinforced insulation acc. to EN 50178, rated insulation voltage $300 \text{ V}_{\text{eff}}$
Indicators/settings		
Display elements		LED
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21
Degree of protection		IEC 60529
Protection against electrical shock		UL 61010-1
Ambient conditions		
Ambient temperature		$-20 \dots 60 \text{ }^\circ\text{C}$ ($-4 \dots 140 \text{ }^\circ\text{F}$)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		$12.5 \times 119 \times 114 \text{ mm}$ ($0.5 \times 4.7 \times 4.5 \text{ inch}$) (W x H x D), housing type A2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		BASEEFA 06 ATEX 0170
Marking		Ⓔ II (1)G [Ex ia Ga] IIC, Ⓔ II (1)D [Ex ia Da] IIIC, Ⓔ I (M1) [Ex ia Ma] I
Output		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
Voltage	U_o	25.2 V
Current	I_o	110 mA
Power	P_o	693 mW
Input		
Maximum safe voltage	U_m	250 V (Attention! The rated voltage can be lower.)
Certificate		PF 06 CERT 0971 X
Marking		Ⓔ II 3G Ex nA IIC T4 Gc
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020, EN 60079-11:2012, EN 60079-15:2010
International approvals		
FM approval		
Control drawing		116-0419 (cFMus)
UL approval		
Control drawing		116-0420 (cULus)


Release date: 2022-01-17 Date of issue: 2022-01-17 Filename: 233601_eng.pdf

Technical Data

IECEX approval		
IECEX certificate		IECEX BAS 06.0032
IECEX marking	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I	
General information		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .	

Assembly

Front view

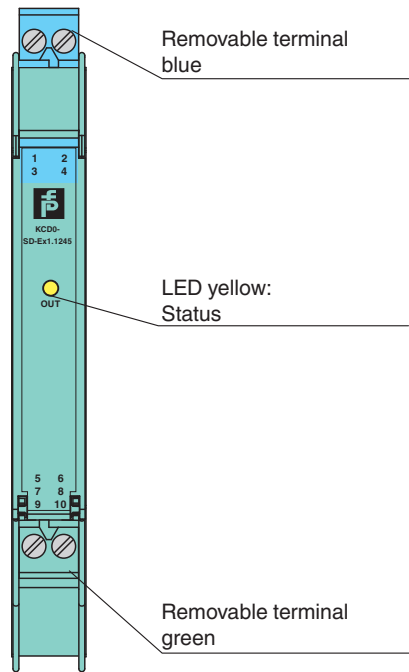

Matching System Components

	K-DUCT-BU	Profile rail, wiring comb field side, blue
---	------------------	--

Accessories


	KC-ST-5GN	Terminal block for KC modules, 2-pin screw terminal, green
	KC-ST-5BU	Terminal block for KC modules, 2-pin screw terminal, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6

Release date: 2022-01-17 Date of issue: 2022-01-17 Filename: 233601_eng.pdf


Characteristic Curve

Output characteristics

Output circuit diagram



Output characteristic

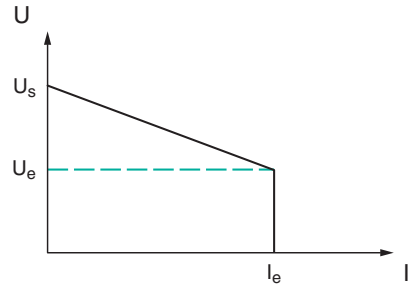

Release date: 2022-01-17 Date of issue: 2022-01-17 Filename: 233601_eng.pdf