




AS-Interface splitter box VAZ-2T2-FK-G10-V1

- One piece housing
- Simple and fast mounting
- Gold-plated and machined contacts
- Immunity to vibration
- Degree of protection IP68 / IP69K

Splitter box G10, AS-Interface and auxiliary voltage to 2 x M12



Dimensions

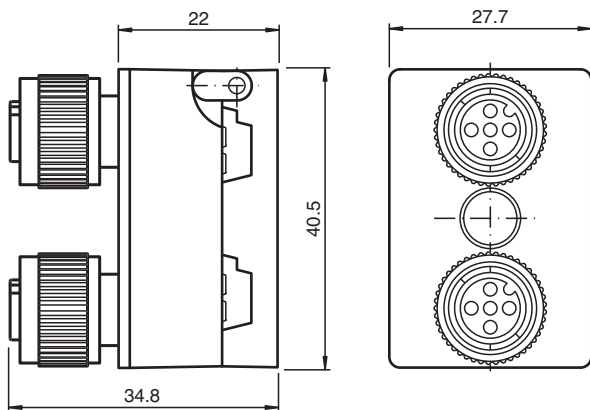

Technical Data


General specifications			
Construction type		Socket, straight Flat cable terminals AS-Interface/ext. auxiliary voltage	
Electrical specifications			
Rated operating voltage	U _e	≤ 60 V PELV	
Rated operating current	I _e	2 x ≤ 4 A AS-Interface, 2 x ≤ 4 A AUX	
Protection class		III	
Surge protection		overvoltage category III	
Pulse withstand voltage		800 V	
Compliance with standards and directives			
Standard conformity			
Degree of protection		EN 60529:2000	
Approvals and certificates			
UL approval		cULus Listed, Type 1 enclosure	
Application		for use in NFPA 79 applications	
Maximum permissible operating voltage		max. 32 V	
UL File Number		E223772	
Ambient conditions			
Ambient temperature		-25 ... 75 °C (-13 ... 167 °F)	

Release date: 2024-12-12 Date of issue: 2024-12-12 Filename: 234518_eng.pdf


Technical Data

Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Pollution degree	3
Mechanical specifications	
Degree of protection	IP67 IP67 / IP68 / IP69K with flat cable VAZ-FK-S-*
Connection	Flat cable AS-Interface: cable piercing method Flat cable ext. auxiliary voltage U _{AUX} : Insulation penetration technology Plug connection: M12 x 1 socket (V1)
Material	
Contacts	CuSn / Au
Housing	PBT PC
Mounting screw	Stainless steel 1.4305 / AISI 303
Mass	50 g
Tightening torque, fastening screws	1.65 Nm
Dimensions	
Height	21.5 mm
Width	27.7 mm
Length	40.5 mm

Connection

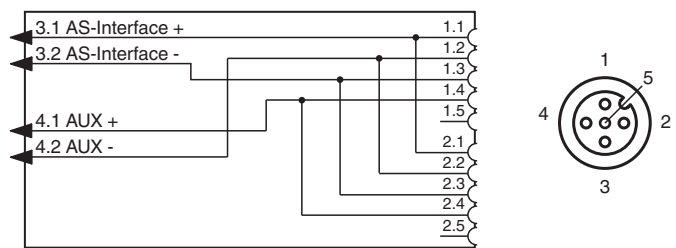

Mounting

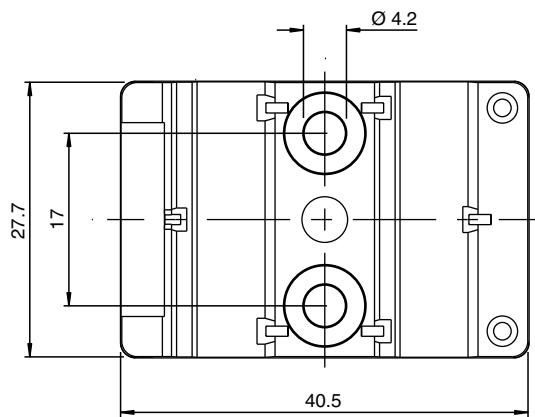

You may screw the device onto a level mounting surface using two M4 attachment screws. The attachment screws are not included.