


Inductive sensor NBB2-12GM60-E2-T



- 2 mm flush
- Extended operating voltage range
- Extended temperature range



Dimensions

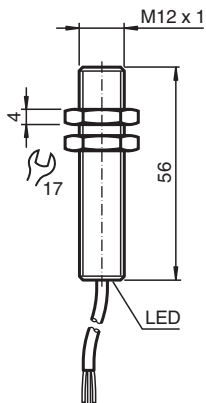

Technical Data

General specifications		
Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s _n	2 mm
Installation		flush
Output polarity		DC
Assured operating distance	s _a	0 ... 1.62 mm
Actuating element		mild steel, e. g. 1.0037, SR235JR (formerly St37-2) 12 mm x 12 mm x 1 mm
Reduction factor r _{Al}		0.35
Reduction factor r _{Cu}		0.2
Reduction factor r ₃₀₄		0.7
Reduction factor r _{Brass}		0.4
Output type		3-wire
Nominal ratings		
Operating voltage	U _B	10 ... 65 V
Switching frequency	f	0 ... 1200 Hz
Hysteresis	H	0.02 ... 0.44 mm
Reverse polarity protection		yes

Release date: 2024-12-10 Date of issue: 2024-12-10 Filename: 236478_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Short-circuit protection		yes
Overload resistance		yes
Wire breakage protection		yes
Inductive overvoltage protection		yes
Surge suppression		yes
Ripple		10 %
Voltage drop	U_d	$\leq 2.5 \text{ V}$
Repeat accuracy	R	0.1 mm
Operating current	I_L	0 ... 300 mA
Off-state current	I_r	0.01 mA
No-load supply current	I_0	$\leq 10 \text{ mA}$
Time delay before availability	t_v	$\leq 40 \text{ ms}$
Switching state indicator		Multihole-LED, yellow

Functional safety related parameters

MTTF _d		1510 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %

Compliance with standards and directives

Standard conformity		
Standards		EN IEC 60947-5-2

Approvals and certificates

UL approval		cULus Listed
-------------	--	--------------

Ambient conditions

Ambient temperature		-25 ... 100 °C (-13 ... 212 °F)
Storage temperature		-40 ... 100 °C (-40 ... 212 °F)

Mechanical specifications

Connection type		cable
Housing material		brass, nickel-plated
Sensing face		PBT
Degree of protection		IP67
Cable		
Wire end ferrules		yes
Cable diameter		4.5 mm $\pm$ 0.15 mm
Bending radius		> 10 x cable diameter
Material		PUR
Color		black
Number of cores		3
Core cross section		0.25 mm ²
Length	L	2 m
Mass		87 g
Dimensions		
Length		56 mm
Diameter		12 mm

Connection

