

HART Termination Board

FI-PFH-TR-AO-380X


- System board for Schneider Electric, Tricon series by Triconex
- HART Termination Board (ETP) for Tricon AO module
- For 8-channel AO card 3805E
- 8-channel
- Field side: pluggable screw terminals, green
- Control side: ELCO socket, 56-pin



Function

The function of the HART Termination Board as well as the connector pin assignment exactly fit the requirement of Triconex systems. The HART termination board has pluggable screw terminals to connect HART field devices. The 26-pin flat cable K-HM26 is used for connection of each HART Multiplexers KFD*-HM*-16 to the termination board. The design permits the fast and reliable installation in the system cabinet.

Connection

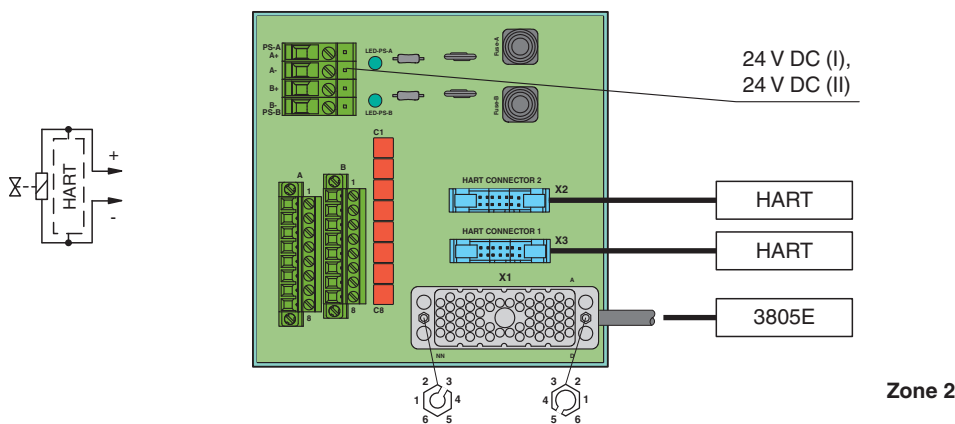

Technical Data

Supply

Rated voltage	U_r	25 ... 28 V DC SELV/PELV
Ripple		max. 10 %
Fusing		1 A
Power dissipation		≤ 500 mW

Interface

Type		multiplexer connection : IDC plug, 26-pin
------	--	---

Redundancy

Supply		Redundancy available. The supply is monitored and fused.
--------	--	--

Signal lines

Rated current	I_B	max. 30 mA per channel
---------------	-------	------------------------

Indicators/settings

Technical Data

Display elements		- LED PS-A (Termination Board power supply), green LED - LED PS-B (Termination Board power supply), green LED
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2017 For further information see system description.
Degree of protection		IEC 60529:2001
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Ambient conditions		
Ambient temperature		0 ... 50 °C (32 ... 122 °F)
Storage temperature		-15 ... 50 °C (5 ... 122 °F)
Relative humidity		≤ 93 % non-condensing
Shock resistance		15 g , 11 ms
Vibration resistance		1 g , 10 ... 150 Hz
Mechanical specifications		
Degree of protection		IP20
Connection		
Field side		pluggable screw terminals , green
Control side		ELCO socket, 56-pin HART : 2 x IDC plug, 26-pin
Supply		screw terminals , green
Core cross section		0.5 ... 2.5 mm ² (20 ... 12 AWG)
Material		
Housing		PVC
Mass		approx. 300 g
Dimensions		126 x 123 x 59 mm (5.0 x 4.9 x 2.3 inch) (W x H x D)
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
Certificate		PF 11 CERT 1933 X
Marking		Ⓔ II 3G Ex nA IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 , EN 60079-15:2010
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Safety Information

We recommend that you do not connect the device supply to a DC supply network.
If you connect the device supply to a DC supply network, make sure that appropriate protective measures are implemented to ensure that no transient overvoltages occur.

Matching System Components


	KFD0-HMS-16	HART Multiplexer Slave
	KFD2-HMM-16	HART Multiplexer Master

Accessories

	K-HM26-114025	HART connection cable for master/slave - termination board connection
	K-HM14	HART connection cable for master - slave connection

Release date: 2023-07-04 Date of issue: 2023-07-04 Filename: 242606_eng.pdf


Connection Assignment

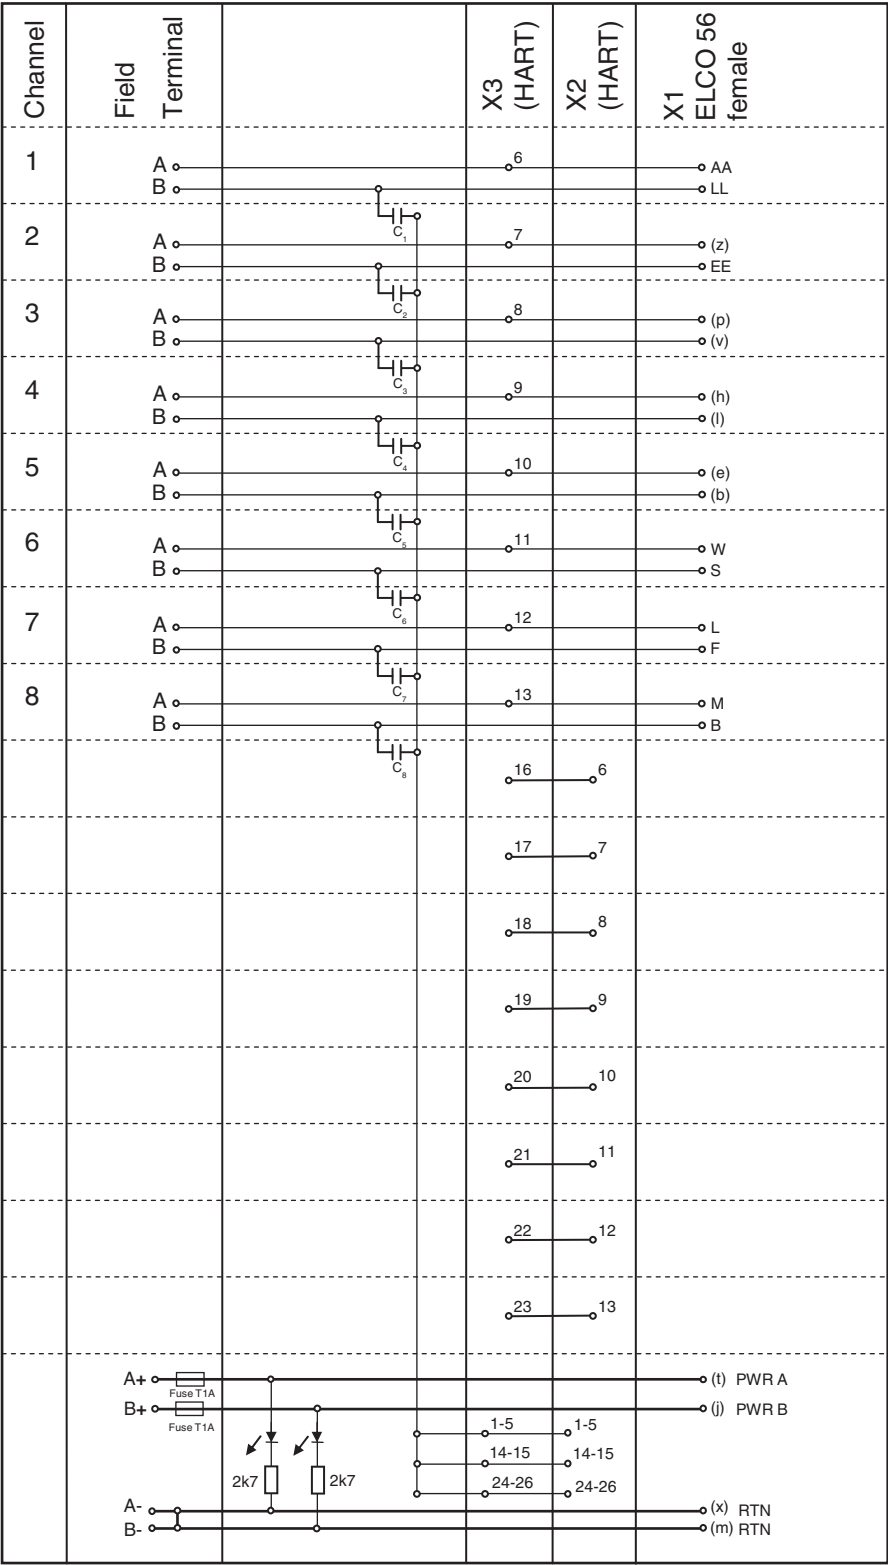


Release date: 2023-07-04 Date of issue: 2023-07-04 Filename: 242606_eng.pdf

Application

Typical loop with 8 channels

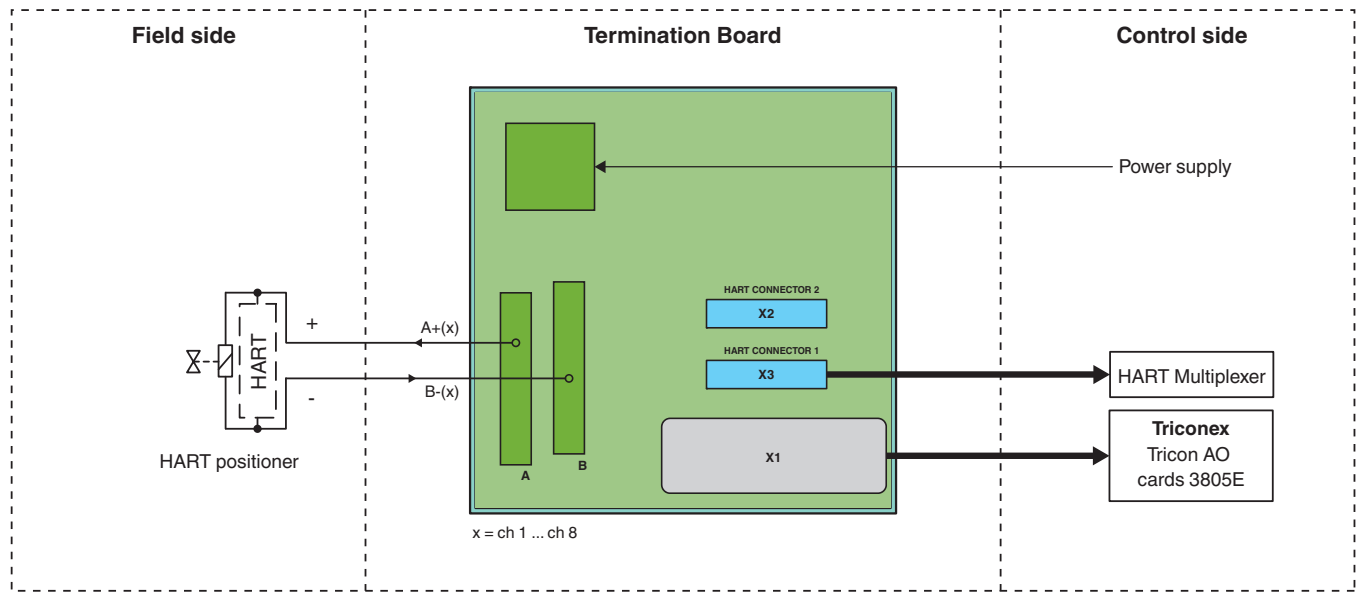

Typical loop with 16 channels

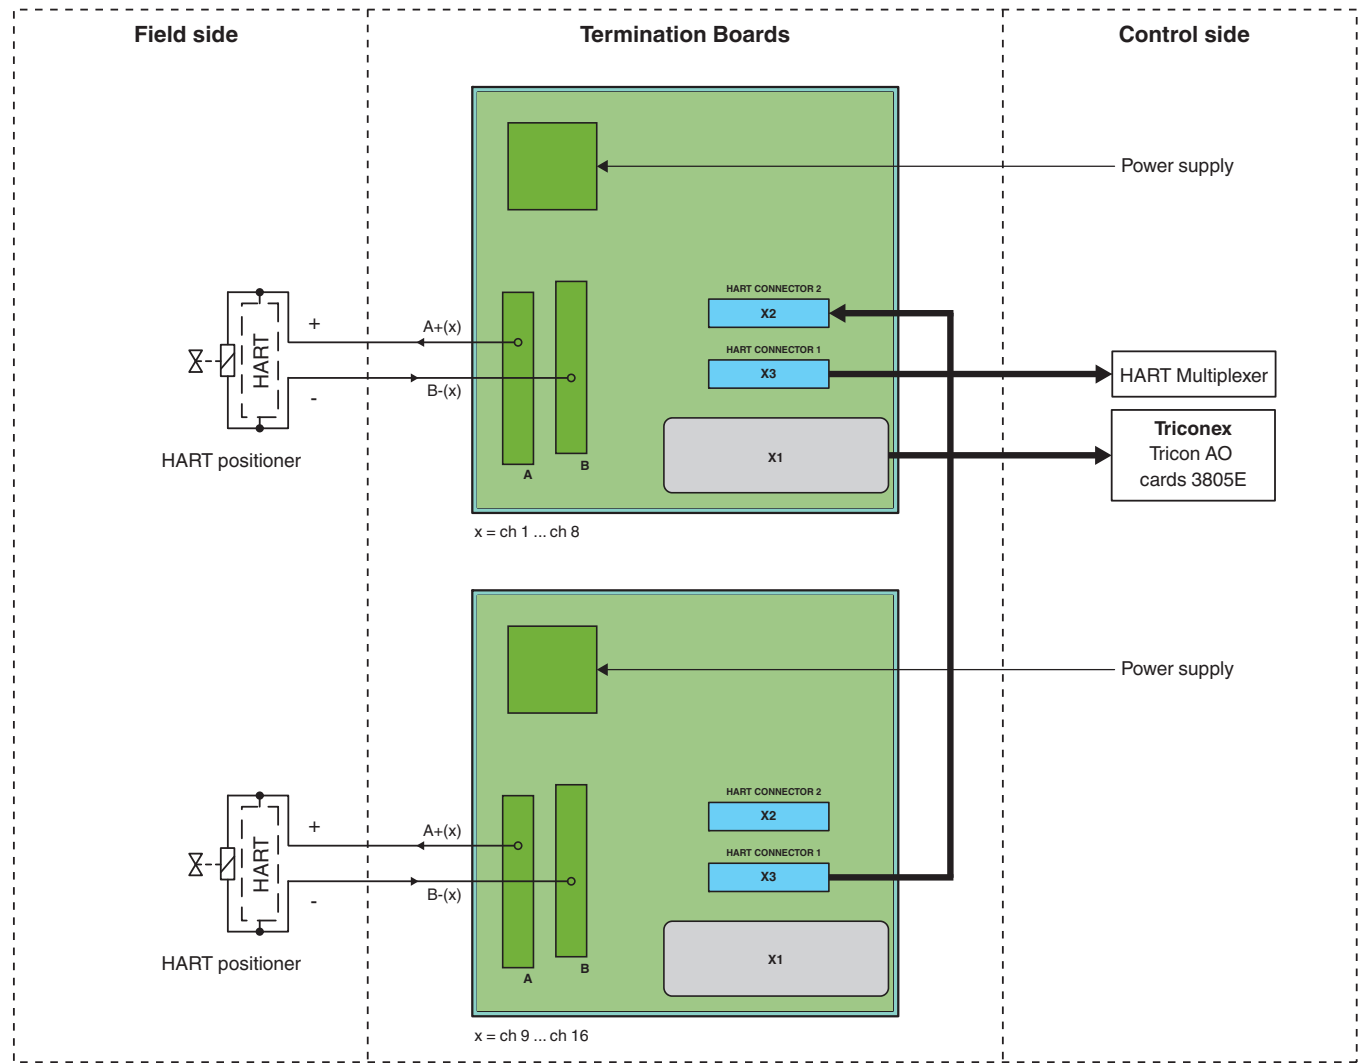

Release date: 2023-07-04 Date of issue: 2023-07-04 Filename: 242606_eng.pdf