




Valve connector, non pre-wired VMA-2+P

- Valve connector as per EN 175301-803
- Degree of protection IP67

Valve connector Form A, non pre-wired

Dimensions

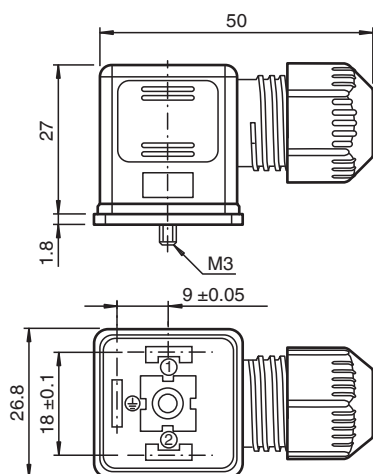

Technical Data

General specifications

Number of pins	2 + PE
Connection 1	Valve connector DIN
Construction type 1	right angle

Electrical specifications

Operating voltage	U_B	250 V AC / 300 V DC
Operating current	I_B	max. 16 A
Volume resistance		< 4 mΩ

Ambient conditions

Ambient temperature	-40 ... 90 °C (-40 ... 194 °F)
Storage temperature	-40 ... 125 °C (-40 ... 257 °F)

Mechanical specifications

Degree of protection	IP67
Connection	Valve connector Form A screw terminal for max. 1.5 mm ² ; 16 AWG
Material	
Contact surface	Ag
Body	PA, black

Release date: 2020-09-03 Date of issue: 2020-09-03 Filename: 246772_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Seal	NBR	
Cable		
Sheath diameter	4 ... 9 mm	

Connection



Release date: 2020-09-03 Date of issue: 2020-09-03 Filename: 246772_eng.pdf