



# Mounting aid OMH-SLCT-10



- Clamp
- Connects two parts with groove
- Parts can be removed individually
- Flat housing
- Suitable for 6.0 mm ... 11.5 mm grooves

Clamp mounting suitable for 6 mm ... 11.5 mm groove

## Dimensions

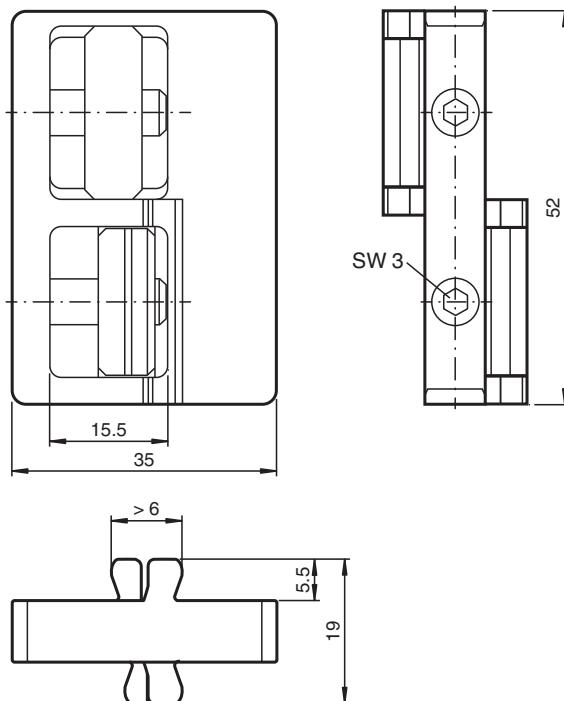

## Technical Data

### Ambient conditions

|                     |                                |
|---------------------|--------------------------------|
| Ambient temperature | -40 ... 80 °C (-40 ... 176 °F) |
| Storage temperature | -40 ... 80 °C (-40 ... 176 °F) |

### Mechanical specifications

|                                     |                   |
|-------------------------------------|-------------------|
| Material                            |                   |
| Housing                             | anodized aluminum |
| Mounting screw                      | Steel             |
| Mass                                | approx. 38 g      |
| Tightening torque, fastening screws | 2.5 Nm            |

### General information

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com


Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

## Technical Data

|                        |  |
|------------------------|--|
| Scope of delivery      | Mounting aid ; Allen wrench SW3                        |
| <b>Suitable series</b> |  |
| Safety Series          | OMH-SLCT-100<br>OMH-SLCT-110<br>SLP / SLC<br>LGS / LGM |

## Mounting

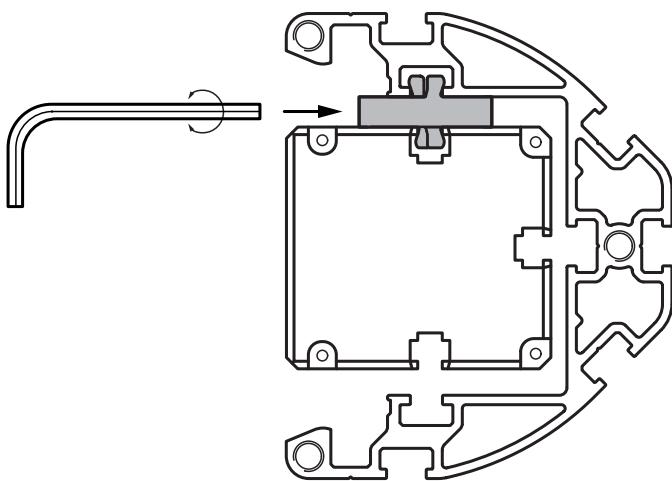

## Mounting

Use at least two mounting brackets for mounting. The distance between the two mounting brackets must not exceed 600 mm.