



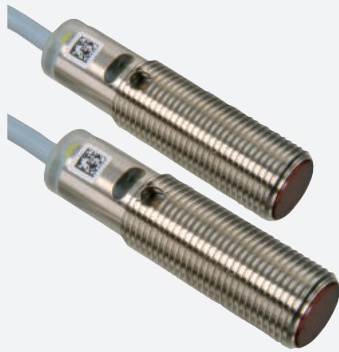

## Thru-beam sensor OBE6000-12GM40-SE4




- Robust M12 threaded housing
- Less space required
- Light-on/dark-on, programmable
- Degree of protection IP67

Thru-beam sensor, M12 threaded housing design, metal housing, front optical face, 6 m detection range, red light, light/dark on, 1 NPN output, fixed cable



### Dimensions

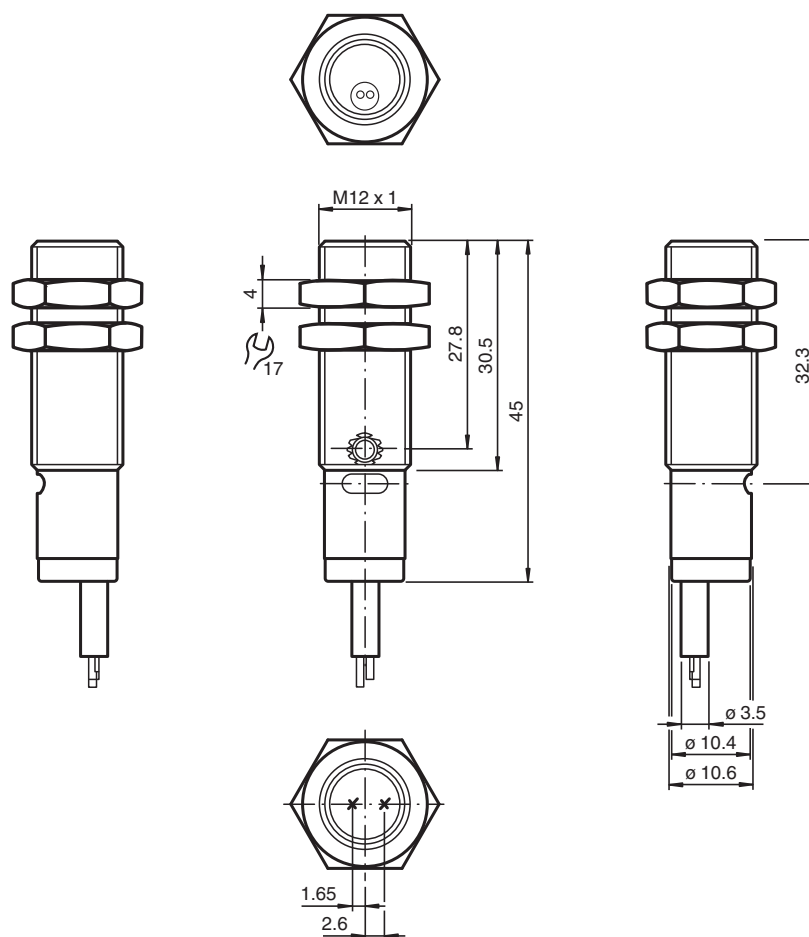

### Technical Data

#### System components

Emitter

OBE6000-12GM40

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 257813\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data



|                                                 |                |                                                                                                                                               |
|-------------------------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Receiver                                        |                | OBE6000-12GM40-E4                                                                                                                             |
| <b>General specifications</b>                   |                |                                                                                                                                               |
| Effective detection range                       |                | 0 ... 6000 mm                                                                                                                                 |
| Threshold detection range                       |                | 8500 mm                                                                                                                                       |
| Adjustment range                                |                | 500 ... 8500 mm                                                                                                                               |
| Reference target                                |                | receiver                                                                                                                                      |
| Light source                                    |                | LED                                                                                                                                           |
| Light type                                      |                | red , 640 nm                                                                                                                                  |
| Angle deviation                                 |                | +/- 2 °                                                                                                                                       |
| Diameter of the light spot                      |                | approx. 800 mm at a distance of 6 m Red light                                                                                                 |
| Opening angle                                   |                | approx. 4                                                                                                                                     |
| Optical face                                    |                | frontal                                                                                                                                       |
| Ambient light limit                             |                | EN 60947-5-2 ; 20000 Lux                                                                                                                      |
| <b>Functional safety related parameters</b>     |                |                                                                                                                                               |
| MTTF <sub>d</sub>                               |                | 806 a                                                                                                                                         |
| Mission Time (T <sub>M</sub> )                  |                | 20 a                                                                                                                                          |
| Diagnostic Coverage (DC)                        |                | 0 %                                                                                                                                           |
| <b>Indicators/operating means</b>               |                |                                                                                                                                               |
| Operation indicator                             |                | LED green: Power on                                                                                                                           |
| Function indicator                              |                | LED yellow: lights up when receiving the light beam ; flashes when falling short of the operating reserve; OFF when light beam is interrupted |
| Control elements                                |                | sensitivity adjustment , receiver                                                                                                             |
| <b>Electrical specifications</b>                |                |                                                                                                                                               |
| Operating voltage                               | U <sub>B</sub> | 10 ... 30 V DC , class 2                                                                                                                      |
| Ripple                                          |                | 10 %                                                                                                                                          |
| No-load supply current                          | I <sub>0</sub> | ≤ 30 mA (emitter and receiver)                                                                                                                |
| <b>Input</b>                                    |                |                                                                                                                                               |
| Control input                                   |                | light on +UB<br>dark on: 0 V                                                                                                                  |
| <b>Output</b>                                   |                |                                                                                                                                               |
| Switching type                                  |                | light/dark on electrically switchable                                                                                                         |
| Signal output                                   |                | 1 NPN output, short-circuit protected, reverse polarity protected, open collector                                                             |
| Switching voltage                               |                | max. 30 V DC                                                                                                                                  |
| Switching current                               |                | max. 100 mA                                                                                                                                   |
| Voltage drop                                    | U <sub>d</sub> | ≤ 2 V                                                                                                                                         |
| Switching frequency                             | f              | ≤ 1000 Hz                                                                                                                                     |
| Response time                                   |                | 0.5 ms                                                                                                                                        |
| <b>Conformity</b>                               |                |                                                                                                                                               |
| Product standard                                |                | EN 60947-5-2                                                                                                                                  |
| <b>Compliance with standards and directives</b> |                |                                                                                                                                               |
| Standard conformity                             |                |                                                                                                                                               |
| Standards                                       |                | UL 508                                                                                                                                        |
| <b>Approvals and certificates</b>               |                |                                                                                                                                               |
| UL approval                                     |                | cULus Listed, Class 2 Power Source, Type 1 enclosure                                                                                          |
| CCC approval                                    |                | CCC approval / marking not required for products rated ≤36 V                                                                                  |
| Approvals                                       |                | CE, cULus Listed 57M3 (Only in association with UL Class 2 power supply; Type 1 enclosure)                                                    |
| <b>Ambient conditions</b>                       |                |                                                                                                                                               |
| Ambient temperature                             |                | -30 ... 60 °C (-22 ... 140 °F)                                                                                                                |
| Storage temperature                             |                | -40 ... 70 °C (-40 ... 158 °F)                                                                                                                |
| <b>Mechanical specifications</b>                |                |                                                                                                                                               |
| Degree of protection                            |                | IP67                                                                                                                                          |
| Connection                                      |                | 2 m fixed cable                                                                                                                               |
| Material                                        |                |                                                                                                                                               |

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 257813\_eng.pdf


Technical Data

|              |                       |
|--------------|-----------------------|
| Housing      | brass, nickel-plated  |
| Optical face | PMMA                  |
| Mass         | approx. 45 g (device) |
| Cable length | 2 m                   |

Connection




Assembly

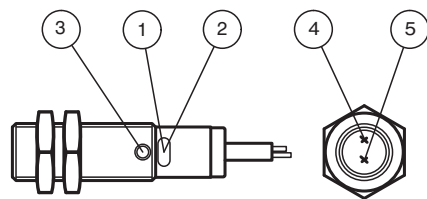


|   |                   |        |
|---|-------------------|--------|
| 1 | Operating display | green  |
| 2 | Signal display    | yellow |
| 3 | Potentiometer     |        |
| 4 | Emitter           |        |
| 5 | Receiver          |        |

Characteristic Curve

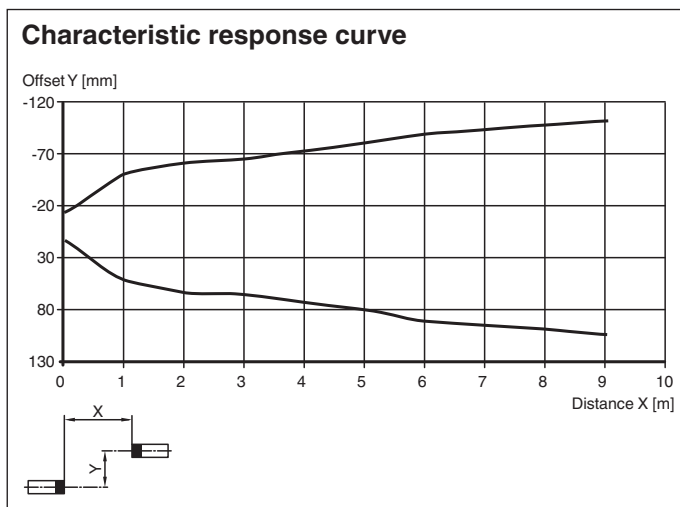

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 257813\_eng.pdf

Characteristic Curve

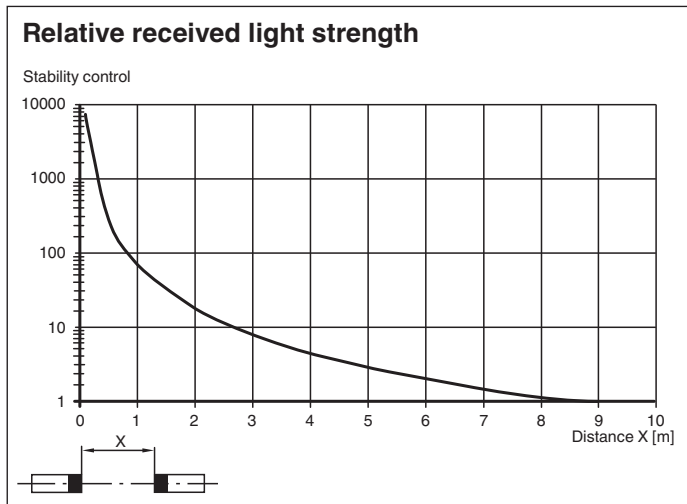

Accessories

|                                                                                    |                |                                                                                   |
|------------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------|
|   | <b>BF 12</b>   | Mounting flange, 12 mm                                                            |
|   | <b>BF 12-F</b> | Plastic mounting adapter, 12 mm                                                   |
|  | <b>BF 5-30</b> | Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm |

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 257813\_eng.pdf