




RFID Transponder IPC11-50CD 10pcs

- Battery-free data carrier
- 40 bit fixcode free programmable
- Readable from both sides
- Degree of protection IP67
- Self-adhesive mounting
- Packaging unit: 10 pieces

Data carrier



Dimensions

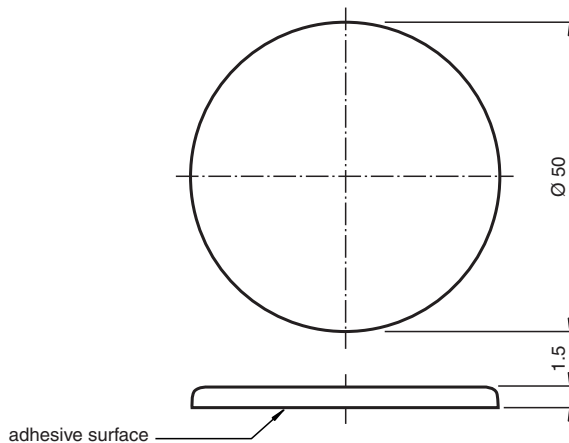

Technical Data

General specifications		
Operating frequency		125 kHz
Transfer rate		2 kBit/s
Memory		
Chip Type		Q5 (Atmel)
EEPROM		40 Bit
Read cycles		unlimited
Directive conformity		
Radio equipment		
Directive 2014/53/EU		EN 300330
RoHS		
Directive 2011/65/EU (RoHS)		IEC/EN 63000
Standard conformity		
Degree of protection		EN 60529
RFID		ISO/IEC 18000-2
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)

Release date: 2022-12-15 Date of issue: 2022-12-15 Filename: 261642_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Housing height		2 mm
Housing diameter		50 mm
Degree of protection		IP67
Material		
Housing		ROYALPLAST, transparent, soft
Installation		
In air		yes
Construction type		Label
Note		Packaging unit, 10-piece

Release date: 2022-12-15 Date of issue: 2022-12-15 Filename: 261642_eng.pdf

Application

The transponder can be read and written from either side.

Release date: 2022-12-15 Date of issue: 2022-12-15 Filename: 261642_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**