



HART Loop Converter KFD2-HLC-Ex1.D.4S


- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- HART field device input with transmitter power supply
- Usable as signal splitter (1 input and several outputs)
- 4 relay contact outputs (NO contact)
- 3 analog outputs 4 mA ... 20 mA
- Sink and source mode output
- Configurable by keypad



Function

This isolated barrier is used for intrinsic safety applications. It is a HART loop converter that provides power to transmitters or can be connected to existing HART loops in parallel. It is able to evaluate up to four HART variables (PV, SV, TV, QV). Of those four HART variables, the data contained in any three of them can be converted to three different 4 mA ... 20 mA current signals. These loop signals can be connected to display devices or analog inputs on the process control system/ control system. In addition to the current outputs, four form A normally open relay contacts are available and can be programmed to operate at trip values from the HART variables. The unit is easily programmed by the use of a keypad located on the front of the unit or with the PACTware™ configuration software. For additional information, refer to the manual and www.pepperl-fuchs.com.

Connection

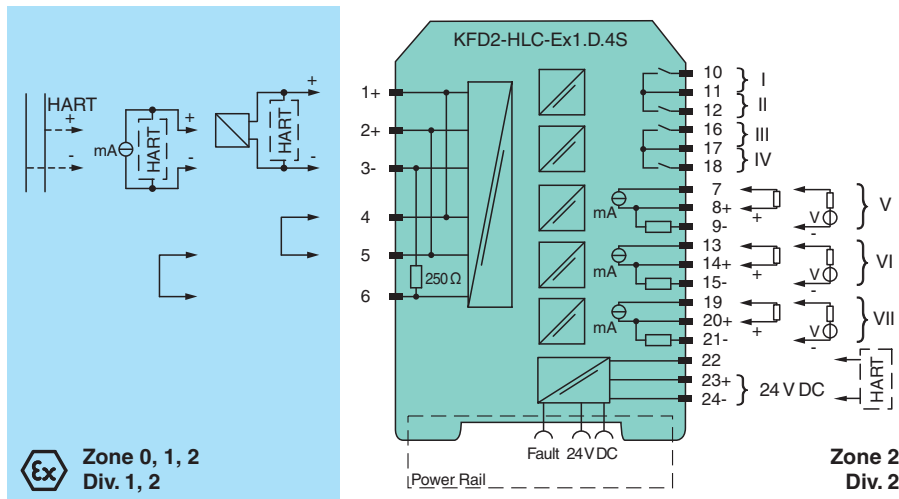

Technical Data

General specifications

Signal type		Analog input
Supply		
Connection		Power Rail or terminals 23+, 24-
Rated voltage	U _r	19 ... 30 V DC
Rated current	I _r	approx. 140 mA at 24 V DC
Power dissipation		2.7 W
Power consumption		3.3 W

HART signal channels (intrinsically safe)

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Conformity		HART field device input (revision 5 to 7)	
Interface			
Programming interface		programming socket	
Input			
Connection side		field side	
Connection			terminals 1, 2, 3, 4, 5, 6
Open circuit voltage/short-circuit current		typ. 24 V / 28 mA	
Input resistance			250 Ω , 5 % (terminals 2, 3 and with jumper on 5, 6)
Available voltage		≥ 15.5 V at 20 mA, short-circuit protected	
Output			
Connection side		control side	
Connection			output I: terminals 10, 11, output II: terminals 11, 12, output III: terminals 16, 17, output IV: terminals 17, 18 output V: terminals 7, 8, 9, output VI: terminals 13, 14, 15, output VII: terminals 19, 20, 21
Output I, II, III, IV			
Output signal			relay and LED yellow
Mechanical life		10 ⁷ switching cycles	
Energized/De-energized delay			approx. 20 ms / approx. 20 ms
Output V, VI, VII			
Output signal			analog
Current range		4 ... 20 mA , (source or sink mode)	
Load			max. 650 Ω , source mode
Voltage range		5 ... 30 V , sink mode from external supply	
Fault signal			downscale I ≤ 2 mA, upscale I ≥ 21.5 mA (acc. NAMUR NE43) or hold measurement value
Other outputs		HART communicator on terminals 22, 24	
Collective error message		Power Rail and LED red	
Transfer characteristics			
Output V, VI, VII			
Resolution			max. 2 μA
Accuracy			< 20 μA, 10 μA typ.
Influence of ambient temperature			< ± 2 μA/K
Duration of measurement/Response delay			HART message acquisition time plus 100 ms
Relay		programmable either for fault or trip value (with direction, hysteresis and delay)	
Galvanic isolation			
Output I, II/III, IV		functional insulation acc. to IEC 62103, rated insulation voltage 250 V _{eff}	
Output I, II, III, IV/other circuits			reinforced insulation acc. to IEC 62103, rated insulation voltage 300 V _{rms}
Output V/VI/VII/power supply		functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}	
Indicators/settings			
Display elements		LEDs , display	
Control elements			Control panel
Configuration		via operating buttons via PACTware	
Labeling			space for labeling at the front
Directive conformity			
Electromagnetic compatibility			
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)	
Low voltage			
Directive 2014/35/EU		EN 61010-1:2010	
Conformity			
Electromagnetic compatibility		NE 21:2006	
Degree of protection			IEC 60529:2001
Ambient conditions			
Ambient temperature			-20 ... 60 °C (-4 ... 140 °F)

Release date: 2023-04-06 Date of issue: 2023-04-06 Filename: 261919_eng.pdf

Technical Data


Mechanical specifications

Degree of protection		IP20
Connection		screw terminals
Mass		300 g
Dimensions		40 x 119 x 115 mm (1.6 x 4.7 x 4.5 inch) (W x H x D) , housing type C2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001

Data for application in connection with hazardous areas

EU-type examination certificate		BASEEFA 07 ATEX 0174
Marking		Ⓔ II (1)G [Ex ia Ga] IIC Ⓔ II (1)D [Ex ia Da] IIIC
Supply		
Maximum safe voltage	U_m	253 V AC (Attention! The rated voltage can be lower.)
Equipment		terminals 1, 4/3 (with link between terminals 4 and 5)
Voltage	U_o	25.2 V
Current	I_o	104.9 mA
Power	P_o	0.661 W
Internal capacitance	C_i	1.1 nF
Internal inductance	L_i	0 mH
Equipment		terminals 2, 5/3
Voltage	U_i	< 28 V
Power	P_i	< 1.33 W
Voltage	U_o	1.1 V
Current	I_o	11.9 mA
Power	P_o	4 mW
Internal capacitance	C_i	0 μ F
Internal inductance	L_i	0 mH
Output I, II, III, IV		terminals 10, 11; 11, 12; 16, 17; 17, 18 , non-intrinsically safe
Maximum safe voltage	U_m	253 V (Attention! U_m is no rated voltage.)
Contact loading		253 V AC/1 A/cos ϕ > 0.7; 30 V DC/1 A resistive load (BASEEFA 07 ATEX 0174) 50 V AC/1 A/cos ϕ > 0.7; 30 V DC/1 A resistive load (Pepperl+Fuchs self-declaration)
Output V, VI, VII		terminals 7, 8, 9; 13, 14, 15; 19, 20, 21 , non-intrinsically safe
Maximum safe voltage	U_m	253 V (Attention! U_m is no rated voltage.)
Certificate		PF 07 CERT 1141 X
Marking		Ⓔ II 3G Ex nA nC IIC T4 Gc
Galvanic isolation		
Input/Other circuits		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		
Control drawing		116-0129
IECEx approval		
IECEx certificate		IECEx BAS 07.0047
IECEx marking		[Ex ia Ga] IIC , [Ex ia Da] IIIC
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

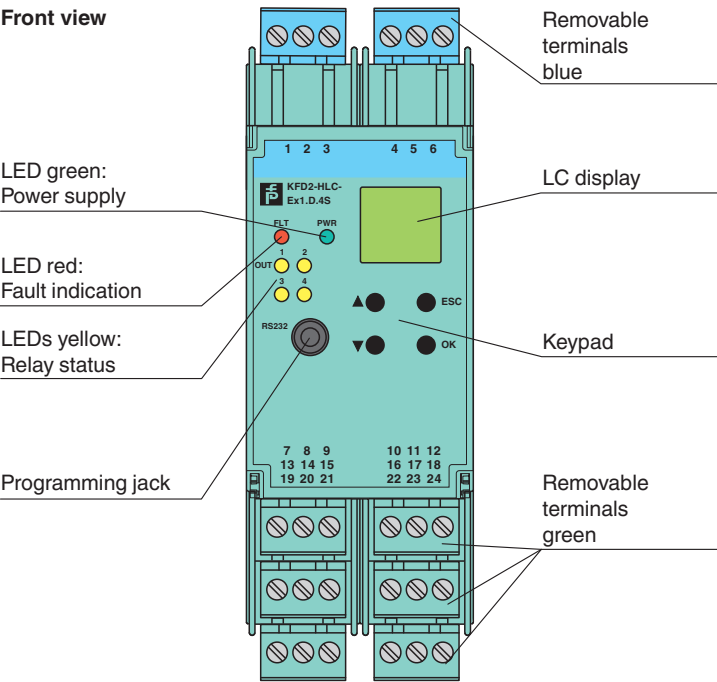

Matching System Components

	DTM HART Loop converter	Device type manager (DTM) for HART communication
	PACTware 5.0	FDT Framework
	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Accessories

	K-250R	Measuring resistor
	K-500R0%1	Measuring resistor

Release date: 2023-04-06 Date of issue: 2023-04-06 Filename: 261919_eng.pdf

Accessories

	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6

Release date: 2023-04-06 Date of issue: 2023-04-06 Filename: 261919_eng.pdf

Application

- Configurable as primary or secondary master
- Automatic HART burst supported
- Support for a HART handheld device connected on safe area side
- Can be configured to assign the same input variable to multiple outputs (signal splitting)