

Bearing box

BRB60N-30S



- High corrosion resistance
- Compact and stable housing
- High shaft load capacity
- Long service life due to minimal heat, even at high rotational speeds
- Low starting torque, even at low temperatures


Bearing box for offshore applications, shaft Ø12x24 with pin hole, max. rotational speed 6000 min-1

Function

The bearing unit is particularly suited for applications where high rotational speeds and large shaft loads can occur. Here the shaft loads are fully taken up by the bearing unit and kept away from the rotary encoder. Ball bearing grease with specially adjusted additivation increases the service life in the event of vibrations, and ensures good distribution of the grease and oil separation. This results in low frictional resistance and self-heating.

The bearing unit is suitable for rotary encoders with Ø12 mm x 20 mm recessed hollow shaft and torque rest, e.g., rotary encoders from the RSI58, ASM58 or ENI58IL-R series.

Dimensions

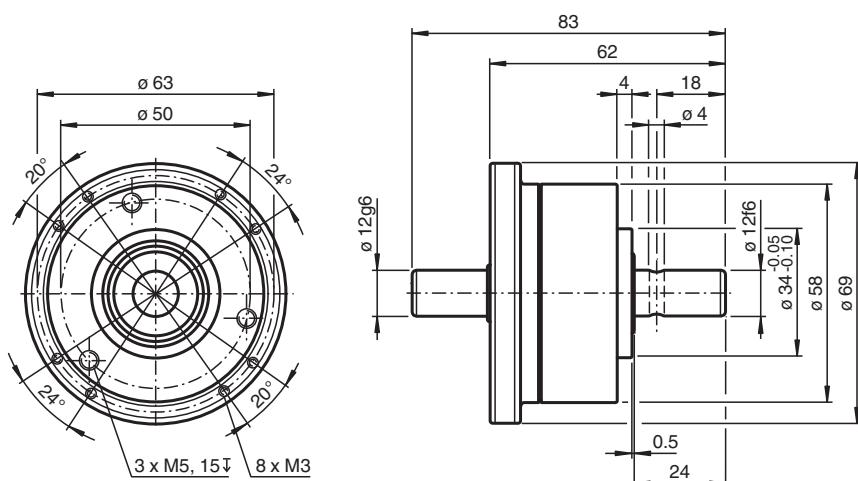

Technical Data

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: 262403_eng.pdf

Standard conformity

Degree of protection DIN EN 60529, IP65, IP66

Climatic testing

Static climatic testing DIN EN 60068-2-78, no moisture condensation

Cyclic climatic testing DIN EN 60068-2-30 55 °C, 6 cycles

Salt spray test DIN EN 60068-2-52, 672 h

Shock resistance DIN EN 60068-2-27, 100 g, 3 ms

Vibration resistance DIN EN 60068-2-6, 10 g, 10 ... 2000 Hz

Ambient conditions

Operating temperature -40 ... 85 °C (-40 ... 185 °F)

Storage temperature -40 ... 95 °C (-40 ... 203 °F)

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

Mechanical specifications

Shaft dimensions	Ø x l	12 x 24 mm with bore hole Ø 4 mm
Material		
Housing		aluminum, coated, salt water resistant
Flange		aluminum, coated, salt water resistant
Shaft		stainless steel 1.4404 / AISI 316L
Mass		approx. 425 g
Rotational speed		max. 6000 min ⁻¹
Starting torque		≤ 10 Ncm
Shaft load		
Axial		200 N
Radial		350 N
Life span		3 x 10 ⁹ @ 3000 min ⁻¹