



Accessory DGE DoorScan Adapter



- Cable adapter for configurable DoorScan presence sensor
- Adapter for connecting cables (e.g., to glass doors, existing cables)
- Tool-free module mounting using snap-in mechanism

Adapter module for installation in the DoorScan® and TopScan sensor profile, multifunction interface module

Dimensions

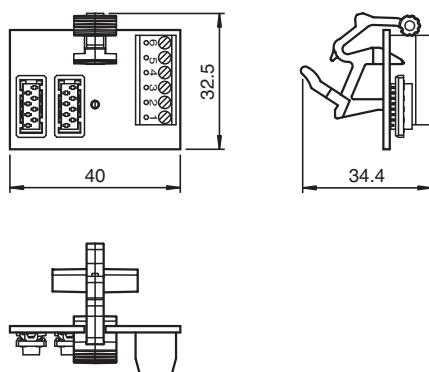

Technical Data

Ambient conditions

Ambient temperature	-30 ... 60 °C (-22 ... 140 °F)
---------------------	--------------------------------

Mechanical specifications


Degree of protection	IP54 (iwhen mounted)
Connection	plug strip 6-pin , socket 8-pin , solder pins 8-pin
Mass	approx. 18 g

General information

Scope of delivery	2 x Adapter
-------------------	-------------

Connection Assignment

Connection Terminals

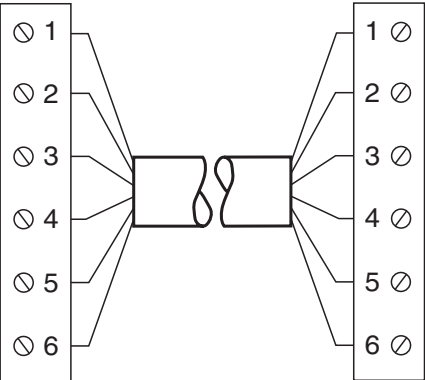


Release date: 2020-09-10 Date of issue: 2020-10-08 Filename: 264990_eng.pdf


Functional Description

The DoorScan adapter facilitates simple mounting of two DoorScan modules facing one another on revolving doors. The adapter is recommended if it is not possible to run a duct through the door panel (fire door, etc.) or if a cable is to be used that has already been installed.

Board Mounting

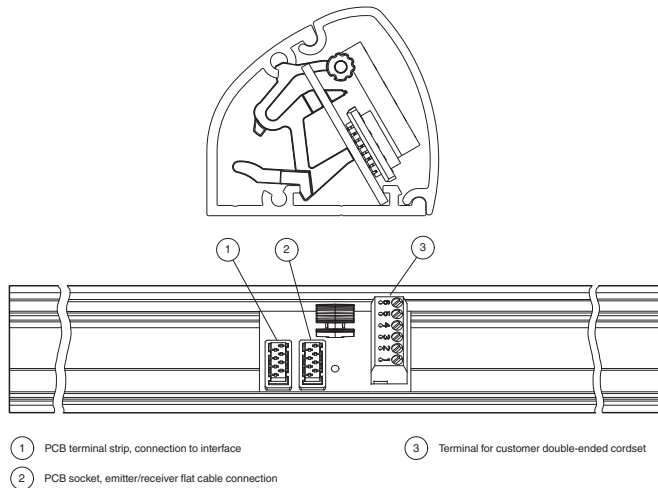

Cable Mounting

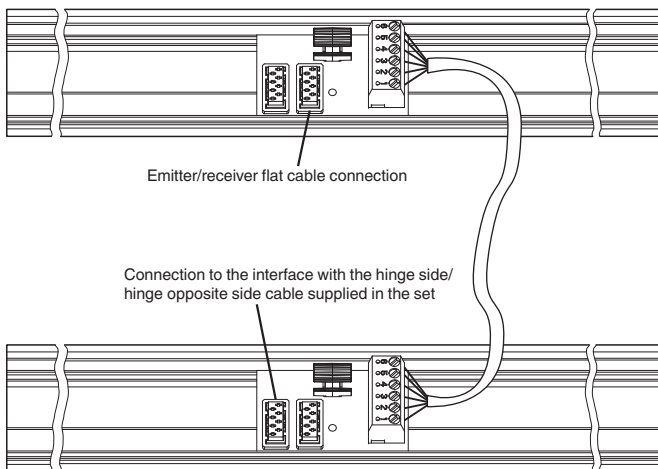

Use a cable with at least six strands.
 The core cross-section can be 0.128 mm² ... 1.0 mm² (~AWG 18)
 Use cable with a maximum length of 1.5 m
 Cover flexible stranded wires with wire end ferrules