



Control Unit Ex e, GRP, Ammeter with Pushbuttons


LCP9.WBAASA.PGMX.PRMX.B.1

- Ammeter 1 A - scale 0 ... 1 / 5 A
- Pushbutton green - 1x NO / 1x NC - labeling 'I'
- Pushbutton red - 1x NO / 1x NC - labeling '0'
- Ex de and Ex tb certified
- Top face stopping plug polyamide, 1x M20; bottom face cable gland polyamide, 1x M20
- Glass-fiber reinforced polyester (GRP) enclosure
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22
- Degree of protection IP66




Connection

	11	23
0	X	
I		X
	12	24



Dimensions

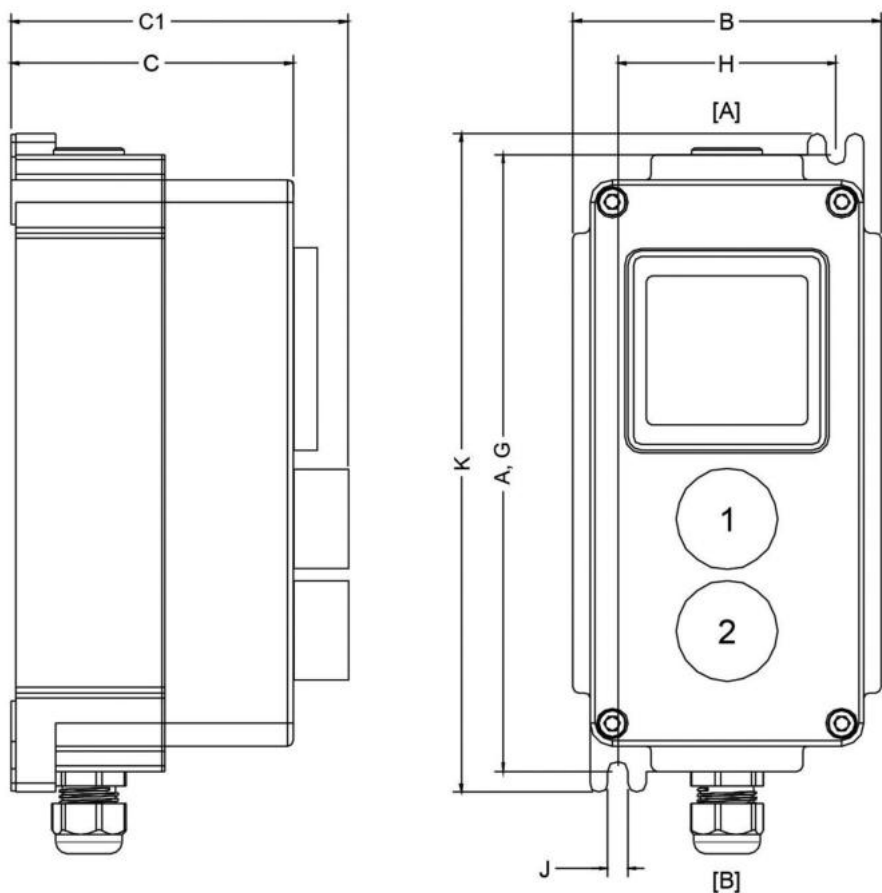

Dimension values see data table.
Image and drawing are generic for this device type and may deviate from the specific variant.

Legend	
A	Height
B	Width
C	Depth
C1	Depth with operating element
G	Mounting holes distance, vertical
H	Mounting holes distance, horizontal
J	Mounting holes diameter
K	Maximum external dimension with mounting brackets
[A] ... [B]	Cable entry faces

Technical Data

Electrical specifications	
Operating voltage	250 V max.
Operating current	16 A max.
Terminal capacity	2.5 mm ²
Function	ammeter 1 A
Rated operating voltage	690 V AC
Rated operating current	1 A
Labeling	scale 0 ... 1 / 5 A

Release date: 2023-10-04 Date of issue: 2023-10-04 Filename: 265391_eng.pdf

Technical Data

Function 2		push button
Color		green
Contact configuration		1x NO / 1x NC all NC contacts have a direct opening action for emergency stop functions
Usage category		AC12 - 12 ... 250 V AC - 16 A AC15 - 12 ... 250 V AC - 10 A DC13 - 12 ... 110 V DC - 1 A DC13 - 12 ... 24 V DC - 1A
Number of poles		2
Labeling		I
Function 3		push button
Color		red
Contact configuration		1x NO / 1x NC all NC contacts have a direct opening action for emergency stop functions
Usage category		AC12 - 12 ... 250 V AC - 16 A AC15 - 12 ... 250 V AC - 10 A DC13 - 12 ... 110 V DC - 1 A DC13 - 12 ... 24 V DC - 1A
Number of poles		2
Labeling		O
Mechanical specifications		
Enclosure range		LCP
Enclosure cover		fully detachable
Cover fixing		stainless steel socket cap head screws
Screws		M6
Number		4
Tightening torque		2 Nm
Degree of protection		IP66
Cable entry face A		
M20 quantity		1
M20 series		Stopping Plugs, Plastic
M20 type		SP.PE.M20.*
Cable entry face B		
M20 quantity		1
M20 series		Cable Glands, Plastic
M20 type		CG.PEDS1.M20.*
M20 clamping range		6 ... 12 mm
Defined entry area		face A and face B
Material		
Enclosure		carbon loaded, antistatic glass-fiber reinforced polyester (GRP)
Finish		inherent color black
Seal		one piece closed cell silicone
Mass		3.5 kg
Dimensions		
Height (A)		220 mm
Width (B)		110 mm
Depth (C)		101 mm
External dimension with operating element (C1)		116 mm
Mounting holes distance (G)		220 mm
Mounting holes distance (H)		78 mm
Mounting holes diameter (J)		7 mm
Maximum external dimension (K)		235 mm
Tightening torque		
Nut torque at enclosure (SW1)		see datasheets of cable glands
Grounding		2.5 mm ² grounding terminal

Release date: 2023-10-04 Date of issue: 2023-10-04 Filename: 265391_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

Technical Data

Ambient conditions

Ambient temperature	-40 ... 55 °C (-40 ... 131 °F) @ T4 -40 ... 40 °C (-40 ... 104 °F) @ T6
---------------------	--

Data for application in connection with hazardous areas

EU-type examination certificate	CML 16 ATEX 3009X
Marking	Ex II 2 GD Ex db eb mb IIC T* Gb Ex tb IIIC T** °C Db T6/T80 °C @ Ta +40 °C T4/T130 °C @ Ta +55 °C

International approvals

IECEX approval	IECEX CML 16.0008X
UKCA approval	CML 22 UKEX 2550X
Further approvals	on request: CCC, ECAS, IA

Conformity

Degree of protection	EN 60529
Usage category	IEC / EN 60947
CE marking	0080 or 0102, see type label

General information

Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .
---------------------------	--

Accessories

Optional accessories	engraved traffolyte tag label engraved AISI 316L stainless steel tag label color in-fill stainless steel tag label
----------------------	--