



## Passive Isolator S1SL-1AI-1C


- 1-channel signal conditioner
- Field side loop powered
- Current input/output 0/4 mA ... 20 mA
- Accuracy 0.1 %
- Reverse polarity protection
- Connection via screw terminals



### Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. The device transfers a 0/4 mA ... 20 mA signal of a current source from the field side to the control side. This device is loop powered. No additional power supply has to be connected.

### Connection

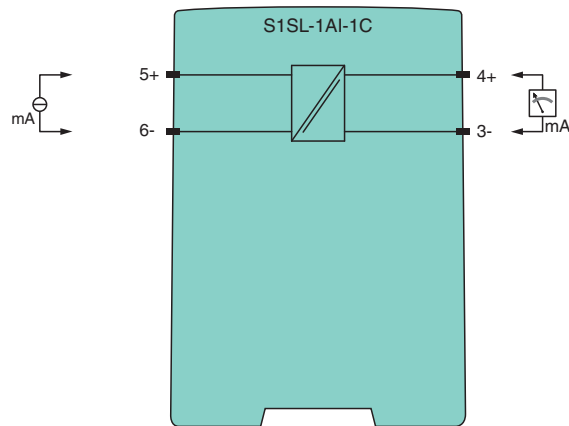

Zone 2  
Div. 2

### Technical Data

#### General specifications

Signal type	Analog input
Operation time	MTBF: 2865 a acc. to SN 29500 stationary continuous operating, average ambient temperature 40 °C (104 °F)

#### Supply

Rated voltage	U <sub>r</sub>	2.2 ... 30 V DC , loop powered
Power dissipation		0.05 W
Power consumption		0.3 W


#### Input

Connection side	field side
Connection	terminals 5+, 6-
Input signal	0/4 ... 20 mA , max. 50 mA






## Technical Data

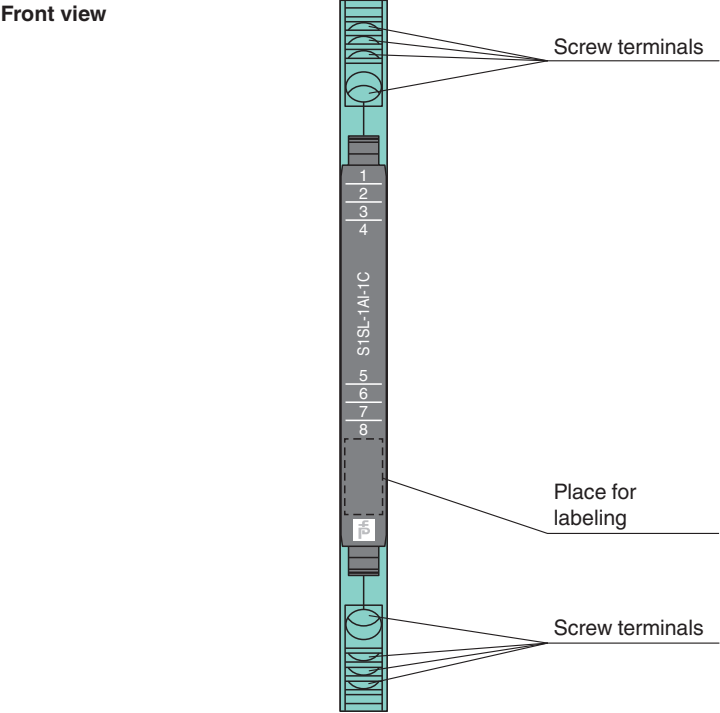Input voltage	≥ 2.3 V + I x load , max. 30 V
Voltage drop	≤ 2.3 V
<b>Output</b>	
Connection side	control side
Connection	terminals 3-, 4+
Analog current output	0/4 ... 20 mA, load ≤ 600 Ω
Ripple	≤ 10 mV <sub>eff</sub>
<b>Transfer characteristics</b>	
Accuracy	max. 0.1 % of full-scale value
Deviation	
Influence of load	0.05 % of the measured value per 100 Ω
Influence of ambient temperature	< 100 ppm/K of full-scale value
Frequency range	0 ... 100 Hz
Rise time/fall time	≤ 3.5 ms
<b>Galvanic isolation</b>	
Field circuit/control circuit	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub> test voltage 3 kV, 50 Hz, 1 min
<b>Indicators/settings</b>	
Labeling	space for labeling at the front
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
<b>Conformity</b>	
Degree of protection	IEC 60529:2001
Protection against electrical shock	EN 61010-1:2010
<b>Ambient conditions</b>	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>	
Degree of protection	IP20
Connection	screw terminals
Core cross section	0.5 ... 2.5 mm <sup>2</sup> (20 ... 14 AWG)
Mass	approx. 70 g
Dimensions	6.2 x 97 x 107 mm (0.24 x 3.82 x 4.21 inch) (W x H x D) , housing type S1
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>	
Certificate	DEMKO 16 ATEX 1750X
Marking	Ⓔ II 3G Ex nA IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-15:2010
<b>International approvals</b>	
UL approval	E106378
IECEx approval	
IECEx certificate	IECEx UL 16.0116X
IECEx marking	Ex nA IIC T4 Gc
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Assembly



Matching System Components

	<b>S1SD-2PF</b>	Power Feed Module
	<b>POWERBUS-SETL5.250</b>	Power bus for 35 mm DIN mounting rail, height: 7.5 mm, length: 250 mm
	<b>POWERBUS-SETH5.250</b>	Power bus for 35 mm DIN mounting rail, height: 15 mm, length: 250 mm
	<b>POWERBUS-COV.250</b>	Cover for 35 mm DIN mounting rail, length: 250 mm
	<b>POWERBUS-CAP</b>	End Cap for Power Bus

Release date: 2022-01-10 Date of issue: 2022-01-10 Filename: 276403\_eng.pdf