




Laser retroreflective sensor OBR2000-R2-E2-0,2M-V3-L




- Ultra-small housing design
- DuraBeam Laser Sensors - durable and employable like an LED
- 45° cable outlet for maximum mounting freedom under extremely tight space constraints
- Improvement in machine availability with abrasion-resistant, antistatic glass front

Laser retroreflective sensor, ultra-small design with M2 mounting, polarization filter, 2000 mm detection range, PNP output, 200 mm fixed cable with plug M8, 3-pin



The nano sensor has been developed for a broad range of applications. It offers excellent durability and is exceptionally easy to install. The housing is compact and, with its 45° cable outlet, can be installed in the smallest spaces. New functional principles and functionality open up a range of new options.

Dimensions

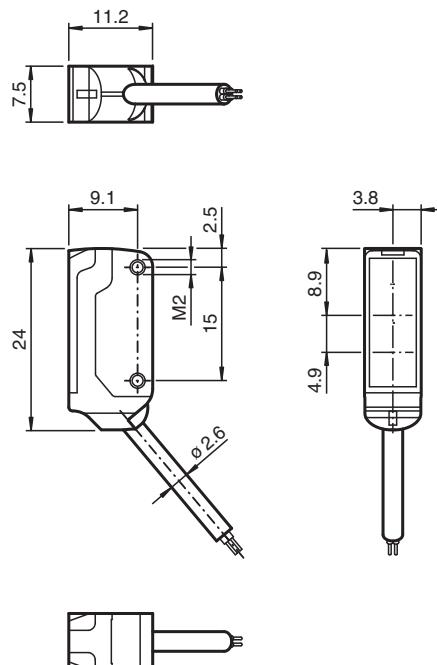

Technical Data

General specifications

| | |
|----------------------------|--|
| Effective detection range | 0 ... 2 m |
| Reflector distance | 40 ... 2000 mm |
| Threshold detection range | 2.3 m |
| Reference target | H40 reflector |
| Light source | laser diode |
| Light type | modulated visible red light , 680 nm |
| Polarization filter | yes |
| Laser nominal ratings | |
| Note | LASER LIGHT , DO NOT STARE INTO BEAM |
| Laser class | 1 |
| Wave length | 680 nm |
| Beam divergence | > 5 mrad |
| Pulse length | approx. 3 μ s |
| Repetition rate | approx. 16.6 kHz |
| max. pulse energy | 8 nJ |
| Diameter of the light spot | approx. 35 mm at a distance of 2000 mm |
| Opening angle | approx. 0.5 ° |
| Optical face | frontal |
| Ambient light limit | EN 60947-5-2 : 30000 Lux |

Functional safety related parameters

| | |
|--------------------------------|-------|
| MTTF _d | 800 a |
| Mission Time (T _M) | 20 a |
| Diagnostic Coverage (DC) | 0 % |

Indicators/operating means

| | |
|---------------------|---|
| Operation indicator | LED green, statically lit Power on , short-circuit : LED green flashing (approx. 4 Hz) |
| Function indicator | LED yellow: lights up when receiving the light beam ; flashes when falling short of the stability control; OFF when light beam is interrupted |

Electrical specifications

| | | |
|------------------------|----------------|-------------|
| Operating voltage | U _B | 12 ... 24 V |
| No-load supply current | I ₀ | < 10 mA |
| Protection class | | III |

Output

| | | |
|---------------------|----------------|---|
| Switching type | | NO contact |
| Signal output | | 1 PNP output, short-circuit protected, reverse polarity protected, open collector |
| Switching voltage | | max. 30 V DC |
| Switching current | | max. 50 mA , resistive load |
| Voltage drop | U _d | ≤ 1.5 V DC |
| Switching frequency | f | approx. 2 kHz |
| Response time | | 250 μ s |

Conformity

| | |
|------------------|-----------------|
| Product standard | EN 60947-5-2 |
| Laser safety | EN 60825-1:2007 |

Approvals and certificates

| | |
|----------------|--|
| EAC conformity | TR CU 020/2011 |
| UL approval | E87056 , cULus Recognized, Class 2 Power Source |
| CCC approval | CCC approval / marking not required for products rated ≤36 V |
| FDA approval | IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007 |

Ambient conditions

| | |
|---------------------|--------------------------------|
| Ambient temperature | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | -30 ... 70 °C (-22 ... 158 °F) |


Mechanical specifications

| | |
|---------------|--------|
| Housing width | 7.5 mm |
|---------------|--------|


Technical Data

| | |
|----------------------|--|
| Housing height | 24 mm |
| Housing depth | 11.2 mm |
| Degree of protection | IP67 |
| Connection | 200 mm fixed cable with 3-pin, M8 x 1 connector |
| Material | |
| Housing | PC/ABS and TPU |
| Optical face | glass |
| Cable | PUR |
| Installation | Fixing screws, 2 x M2 allen head screws included with delivery |
| Mass | approx. 10 g |
| Cable length | 200 mm |

Connection




Connection Assignment



Wire colors in accordance with EN 60947-5-2


| | | |
|---|----|---------|
| 1 | BN | (brown) |
| 3 | BU | (blue) |
| 4 | BK | (black) |

Assembly

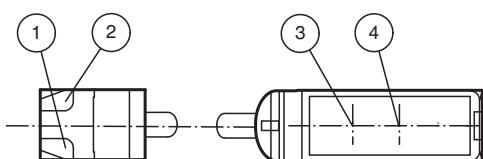


| | | |
|---|-------------------|--------|
| 1 | Operating display | green |
| 2 | Signal display | yellow |
| 3 | Emitter | |
| 4 | Receiver | |

Characteristic Curve

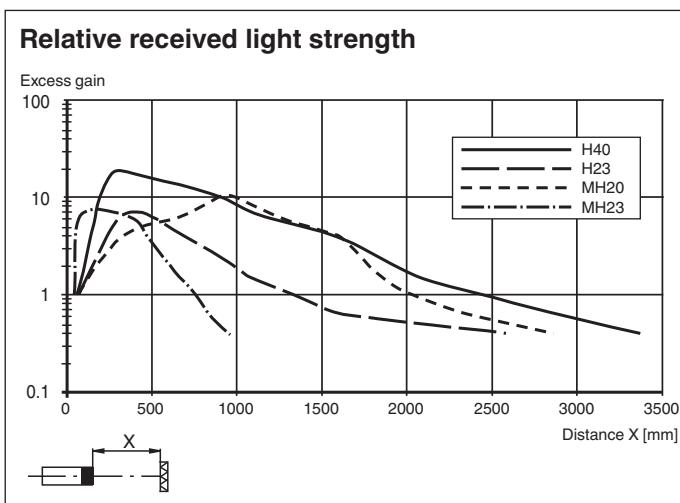

Safety Information

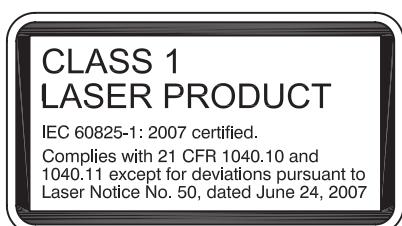

Accessories

| | | |
|--|-----------------|--|
| | MH-R2-01 | Mounting aid for R2 series, Mounting bracket |
| | MH-R2-02 | Mounting aid for R2 series, Mounting bracket |
| | MH-R2-03 | Mounting aid for R2 series, Mounting bracket |
| | MH-R2-04 | Mounting aid for R2 series, Mounting bracket |

Accessories

| | | |
|---|---------------------|---|
|  | REF-H40 | Reflector, rectangular 47.5 mm x 23.5 mm, mounting holes, fixing strap |
|  | REF-H23 | Reflector with mounting holes |
|  | REF-MH20 | Reflector with Micro-structure, rectangular 32 mm x 20 mm, mounting holes |
|  | REF-MH23 | Reflector with Micro-structure, rectangular 23 mm x 13.8 mm, diagonal mounting hole |
|  | V3-GM-2M-PUR | Female cordset single-ended M8 straight A-coded, 3-pin, PUR cable grey |
|  | V3-WM-2M-PUR | Female cordset single-ended M8 angled A-coded, 3-pin, PUR cable grey |