




## Protective enclosure SH-Lx-M20

- Protection against contamination and damage
- Captive screws for easy mounting
- Different cable glands available
- Spacer to fix the sensor

Protective enclosure and spacer for VariKont L

## Dimensions

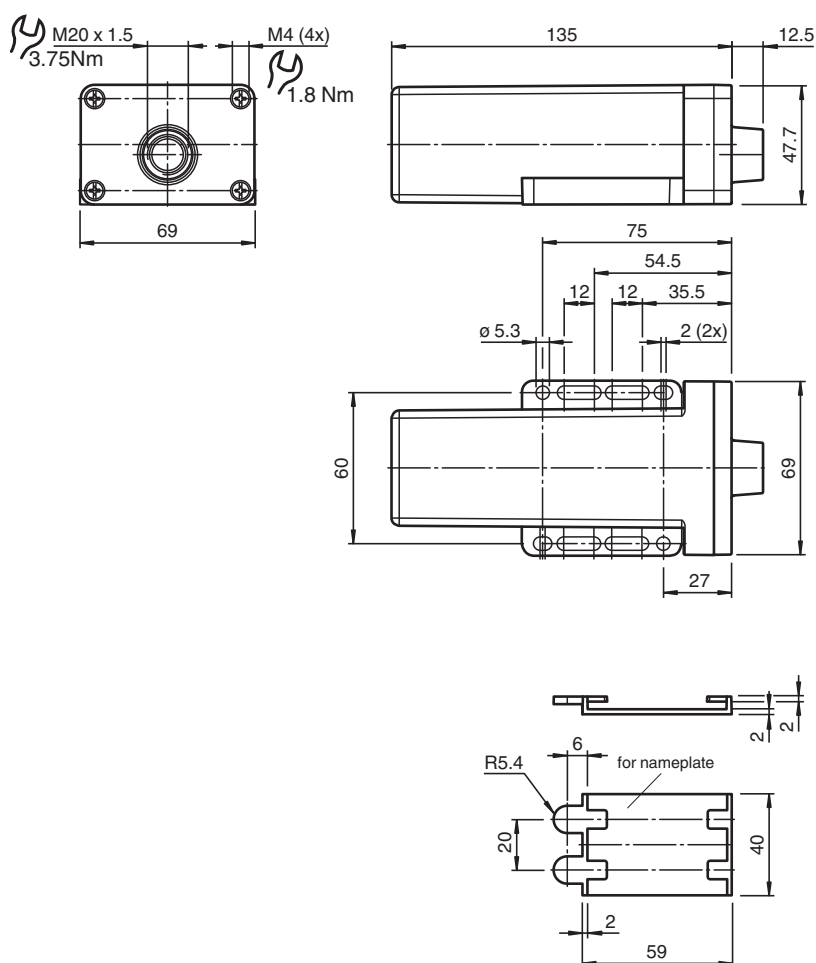

## Technical Data

### Ambient conditions

Ambient temperature

- 25 ... 85 °C (77 ... 185 °F)

## Technical Data

|                                  |                                 |
|----------------------------------|---------------------------------|
| Storage temperature              | - 40 ... 85 °C (104 ... 185 °F) |
| <b>Mechanical specifications</b> |                                 |
| Degree of protection             | IP67                            |
| <b>Material</b>                  |                                 |
| Housing                          | PEI                             |
| Enclosure cover                  | HD-PE                           |
| Spacer element                   | ABS                             |
| <b>Accessories</b>               |                                 |
| Optional accessories             | Cable glands CG.NA.*            |

## Accessories

|                                                                                   |                          |                                                                                          |
|-----------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------|
|  | <b>V1-GV4A-2M-PP-W1</b>  | Single-ended female cordset, M12, V4A stainless steel, wash-down design, 4-pin, PP cable |
|  | <b>V1-GV4A-5M-PP-W1</b>  | Single-ended female cordset, M12, V4A stainless steel, wash-down design, 4-pin, PP cable |
|  | <b>V1-GV4A-10M-PP-W1</b> | Single-ended female cordset, M12, V4A stainless steel, wash-down design, 4-pin, PP cable |