


Extension Backplane


LB9027BP16200.1



- Backplane for LB-System
- Fieldbus type determined by base backplane
- Max. 16 slots for I/O modules
- Mounting in Zone 2, Class I/Div.2 or in the safe area

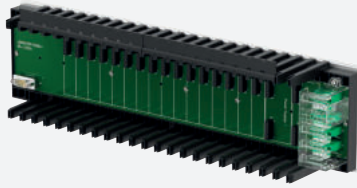

Assembly

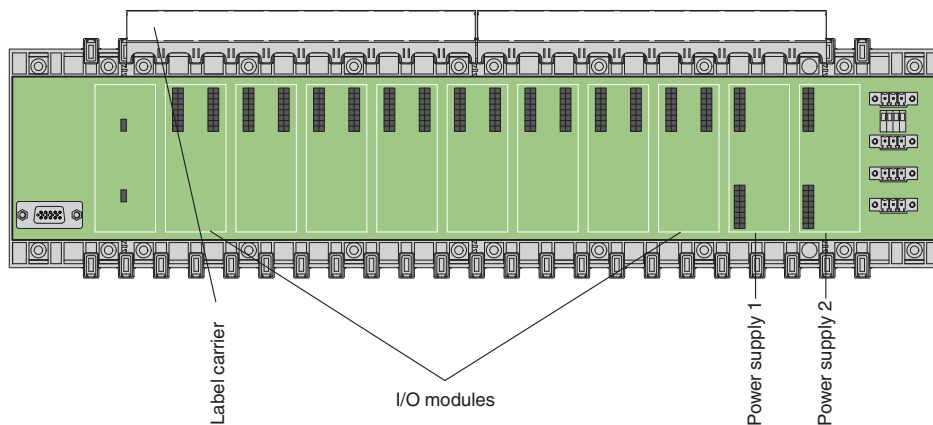

Technical Data

General specifications

Suitable components	Backplane LB9026BP16210.0.E , LB9026BP16210.1
---------------------	---

Slots

Supply	2
I/O modules (single width)	max. 16
I/O modules (dual width)	max. 8

Supply

Maximum safe voltage U_m	60 V DC (SELV/PELV)
Input voltage range	U 18 ... 32 V DC (SELV/PELV)
Redundancy	no

Fieldbus connection

Fieldbus type	PROFIBUS DP/DP-V1, PROFINET or MODBUS RTU/TCP , depending on the base backplane
Redundancy	no

Directive conformity

Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013

Release date: 2023-11-28 Date of issue: 2023-11-28 Filename: 282734_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Conformity		
Electromagnetic compatibility		NE 21
Degree of protection		EN 60529
Ambient conditions		
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F) , 70 °C (non-Ex)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		95 % non-condensing
Altitude		max. 2000 m
Shock resistance		shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance		frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance
Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Degree of protection		IP20
Mass		approx. 1340 g
Dimensions		(W x H x D) 440 x 127 x 80 mm (17.3 x 5 x 3.15 inch) , without modules
Data for application in connection with hazardous areas		
Certificate		BVS 16 ATEX E 089 X
Marking		Ⓔ II 3 G Ex nA IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 EN 60079-15:2010
International approvals		
UL approval		E106378
Control drawing		116-0321
IECEx approval		IECEx BVS 16.0047X
Approved for		Ex nA IIC T4 Gc
General information		
Supplementary information		Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .