



## Adapter cable


### V19-G-6M-PUR-ABG-V15B-G

- Degree of protection IP67 / IP68 / IP69
- Halogen-free
- Shield connected to screw connection
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Cordset M12 socket straight A-coded 8-pin to M12 plug straight B-coded 5-pin, PUR cable grey, shielded



## Dimensions

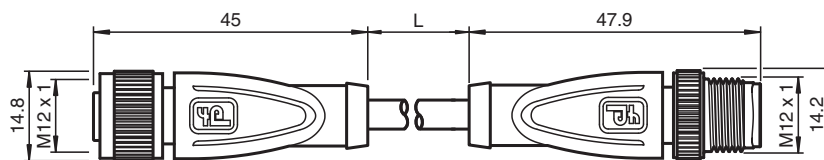

## Technical Data

### General specifications

|                   |  |                  |
|-------------------|--|------------------|
| Connector 1       |  |                  |
| Connection        |  | socket           |
| Construction type |  | M12              |
| Style             |  | straight         |
| Locking           |  | screw connection |
| Number of pins    |  | 8                |
| Coding            |  | A-coded          |
| Connector 2       |  |                  |
| Connection        |  | plug             |
| Construction type |  | M12              |
| Style             |  | straight         |
| Locking           |  | screw connection |
| Number of pins    |  | 5                |
| Coding            |  | B-coded          |

### Electrical specifications

|                   |                |                 |
|-------------------|----------------|-----------------|
| Operating voltage | U <sub>B</sub> | max. 30 V AC/DC |
|-------------------|----------------|-----------------|

Release date: 2022-01-25 Date of issue: 2022-01-25 Filename: 287446\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com


**PEPPERL+FUCHS**

## Technical Data

|                                  |                |                                                                         |
|----------------------------------|----------------|-------------------------------------------------------------------------|
| Operating current                | I <sub>B</sub> | max. 2 A                                                                |
| <b>Conformity</b>                |                |                                                                         |
| Degree of protection             |                | EN 60529                                                                |
| Plug connection                  |                | connector M12 x 1 : IEC 61076-2-101                                     |
| Halogen-free                     |                | DIN VDE 0472-815<br>DIN EN 50267-2-1                                    |
| <b>Ambient conditions</b>        |                |                                                                         |
| Ambient temperature              |                |                                                                         |
| Plug connector                   |                | -40 ... 90 °C (-40 ... 194 °F)                                          |
| Cable, fixed                     |                | -40 ... 80 °C (-40 ... 176 °F)                                          |
| Cable, flexing                   |                | -25 ... 80 °C (-13 ... 176 °F)                                          |
| Pollution degree                 |                | 3                                                                       |
| <b>Mechanical specifications</b> |                |                                                                         |
| Plug connector                   |                |                                                                         |
| Tightening torque                |                | 0.6 Nm                                                                  |
| Loosening protection             |                | available                                                               |
| Tool installation                |                | straight knurling                                                       |
| Mating cycles                    |                | min. 100                                                                |
| Shielding                        |                | shield connected to screw connection                                    |
| Degree of protection             |                | IP67 / IP68 / IP69                                                      |
| Cable                            |                | according to IEC/EN 60228 (DIN VDE 0295) class 5                        |
| Sheath diameter                  |                | 4.8 mm                                                                  |
| Bending radius                   |                | > 10 x cable diameter, moving<br>> 5 x cable diameter, fixed            |
| Sheath stripping force           |                | max. 100 N / 300 mm                                                     |
| Sheath color                     |                | grey (similar to RAL 7001)                                              |
| Number of cores                  |                | 4                                                                       |
| Core cross section               |                | 0.34 mm <sup>2</sup>                                                    |
| Cores color                      |                | Core 2-1: brown<br>Core 3-4: black<br>Core 4-2: white<br>Core 7-3: blue |
| Core construction                |                | 19 x 0.15 mm Ø                                                          |
| Shield                           |                | tinned copper braiding, 85 % coverage                                   |
| Length                           | L              | 6 m                                                                     |
| Cable code                       |                | Li 9Y 11YM 4 x 0.34                                                     |
| <b>Material</b>                  |                |                                                                         |
| Halogen-free                     |                | yes                                                                     |
| Plug connector                   |                |                                                                         |
| Screw connection                 |                | Zinc diecast, nickel-plated                                             |
| Body                             |                | TPU, black                                                              |
| Contact surface                  |                | Au                                                                      |
| Flammability                     |                | V-2                                                                     |
| Cable                            |                |                                                                         |
| Sheathing                        |                | PUR based on polyether                                                  |
| Core insulation                  |                | PP                                                                      |
| Chemical resistance              |                | good                                                                    |

Release date: 2022-01-25 Date of issue: 2022-01-25 Filename: 287446\_eng.pdf

Connection Assignment

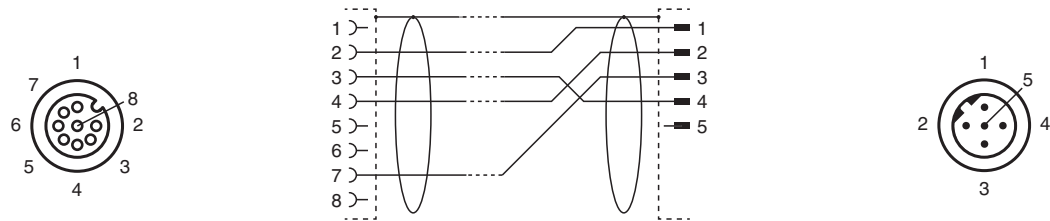

Accessories

|                                                                                     |                              |                                                  |
|-------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------|
|    | <b>MH V1-SCREWDRIVER</b>     | torque screwdriver (0.6 Nm)                      |
|    | <b>MH V1-BIT M12</b>         | plug-in cap M12                                  |
|    | <b>V1/V3-LABELHOLDER</b>     | Label holder                                     |
|    | <b>V1/V3-LABEL</b>           | Label plate                                      |
|    | <b>MH V1-Holder</b>          | Modular universal holder for M12 connectors      |
|  | <b>V1-CLIP</b>               | Unlocking protector for M12 connector            |
|  | <b>V1-MARKING-RING-COLOR</b> | Marking rings for M12 connectors, various colors |