




Stopping Plugs, Plastic

SP.PE.M32.PA.C.15.K20

- Stopping plug for unused cable entries
- High impact-resistant polyamide material
- Thread M32
- Hexagon head
- Ex eb and Ex tb certified
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Full impact resistance of 7 J according to IEC/EN 60079-0 for the full range without limitations
- Packaging unit: 20 pieces, without accessories



Dimensions

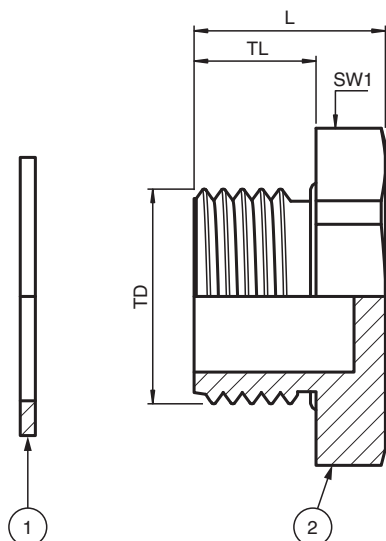

Details see data table

Legend	
1	Flat gasket
2	Stopping plug
L	Total length
SW*	Width across flats
TD	Thread size
TL	Thread length

Technical Data

Mechanical specifications

Thread type		metric ISO pitch 1.5 mm
Thread size (TD)		M32
Degree of protection		IP66 / IP68
Material		
Finish		inherent color black
Washer gasket		flat chloroprene gasket
Stopping plug		high impact-resistant polyamide
Mass		
Individual component		approx. 12 g
Packing unit		approx. 275 g
Dimensions		
Diameter thru-hole (DT)		32 ... 32.3 mm
Width across flats (SW1)		36 mm
Thread length (TL)		15 mm
Total length (L)		22.8 mm
Tightening torque		
Nut torque at enclosure (SW1)		4 Nm

Ambient conditions

Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
---------------------	--	--------------------------------

Data for application in connection with hazardous areas

EU-type examination certificate		IMQ 15 ATEX 006X
Marking		Ⓔ II 2 GD Ex eb IIC Gb Ex tb IIIC Db

International approvals

IECEx approval		IECEx IMQ 15.0001X
UKCA approval		CML 22 UKEX 31379X
INMETRO approval		DNV 20.0032 X
CCC approval		2021312313000455

Conformity

Degree of protection		EN 60529
----------------------	--	----------

General information

Delivery quantity		20
Scope of delivery		Stopping Plugs, Plastic Brief instructions (1 copy)
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .