




## Stopping Plugs, Plastic

### SP.PE.M40.PA.C.18.K10

- Stopping plug for unused cable entries
- High impact-resistant polyamide material
- Thread M40
- Hexagon head
- Ex eb and Ex tb certified
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Full impact resistance of 7 J according to IEC/EN 60079-0 for the full range without limitations
- Packaging unit: 10 pieces, without accessories



## Dimensions

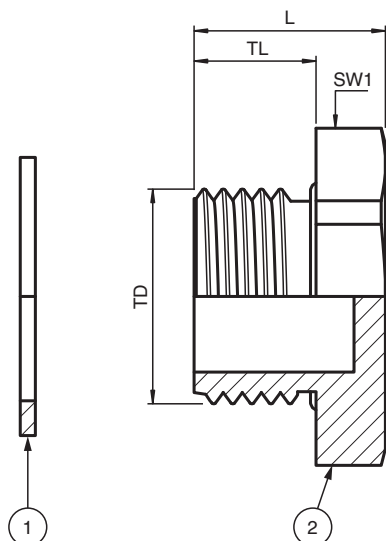

Details see data table

Legend	
1	Flat gasket
2	Stopping plug
L	Total length
SW*	Width across flats
TD	Thread size
TL	Thread length

## Technical Data

### Mechanical specifications

Thread type	metric ISO pitch 1.5 mm
Thread size (TD)	M40
Degree of protection	IP66 / IP68
Material	
Finish	inherent color black
Washer gasket	flat chloroprene gasket
Stopping plug	high impact-resistant polyamide
Mass	
Individual component	approx. 22 g
Packing unit	approx. 220 g
Dimensions	
Diameter thru-hole (DT)	40 ... 40.3 mm
Width across flats (SW1)	46 mm
Thread length (TL)	18 mm
Total length (L)	26.5 mm
Tightening torque	
Nut torque at enclosure (SW1)	6 Nm

### Ambient conditions

Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)
---------------------	--------------------------------

### Data for application in connection with hazardous areas

EU-type examination certificate	IMQ 15 ATEX 006X
Marking	Ⓔ II 2 GD Ex eb IIC Gb Ex tb IIIC Db

### International approvals

IECEx approval	IECEx IMQ 15.0001X
UKCA approval	CML 22 UKEX 31379X
INMETRO approval	DNV 20.0032 X
CCC approval	2021312313000455

### Conformity

Degree of protection	EN 60529
----------------------	----------

### General information

Delivery quantity	10
Scope of delivery	Stopping Plugs, Plastic Brief instructions (1 copy)

Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
---------------------------	--