

RFID Transponder


IUC76-F209-M-FR2 10pcs



- Operating frequency: 902 MHz ... 928 MHz
- Complies with EPC Gen2 (ISO/IEC 18000-63)
- Sturdy housing, suitable for rough industrial use
- Optimized for mounting in metal

Data carrier

Dimensions

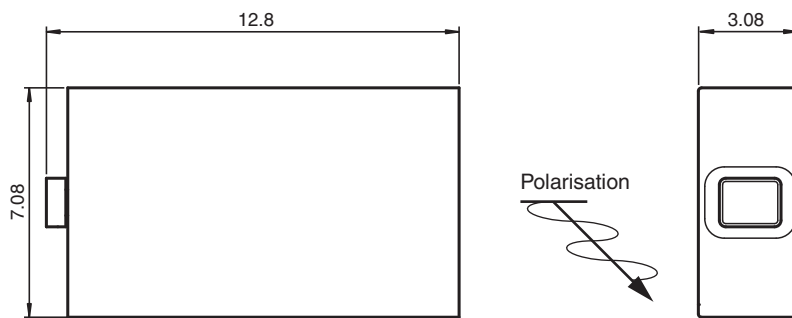

Technical Data

General specifications

Operating frequency	902 ... 928 MHz
Polarization	linear

Memory

Chip Type	Higgs-3 (Alien)
Memory Bank 00 (Reserved)	64 Bit
Memory Bank 01 (EPC/UII)	96 ... 480 Bit
Memory Bank 10 (TID)	96 Bit
Memory Bank 11 (User memory)	512 Bit
Read cycles	unlimited
Write cycles	> 100000
Data retention period	50 years

Standard conformity

Degree of protection	EN 60529
RFID	ISO/IEC 18000-63

Ambient conditions

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
---------------------	--------------------------------

Release date: 2021-04-22 Date of issue: 2021-04-22 Filename: 294603_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Storage temperature		-40 ... 150 °C (-40 ... 302 °F) 200 °C (392 °F) for 3 hours 220 °C (428 °F) for 30 minutes
Mechanical specifications		
Housing length		12.8 mm
Housing width		7.08 mm
Housing height		3.08 mm
Degree of protection		IP68
Material		
Housing		Ceramic
Installation		Adhesive
In metal		yes
Mass		1.4 g
Construction type		Rectangular type
Note		Packaging unit, 10-piece