




Retroreflective sensor for glass detection

ML100-55-G/103/115



- Miniature design
- Detects transparent materials
- Teach-in switch for setting the contrast detection levels
- Automatic adjustment in case of soiling in contrast detection mode
- Very bright, highly visible light spot
- Full metal thread mounting


Retroreflective sensor for glass detection, plastic housing, detection range: 2.5 m, red light, teach-in, light/dark on, PNP output, fixed cable



Function

The optical sensors of this series are suitable for both standard and demanding applications. The series features a miniature housing design, two M3 metal-threaded mounting holes and a highly visible LED status indicator. Each device is equipped with a sensitivity adjuster and a light-on/dark-on changeover switch for increased flexibility. A wide variety of versions are available in both infrared light and red light with PowerBeam for easy alignment. Special versions with BlueBeam are suitable for challenging applications like those in the solar and battery industries.

Dimensions

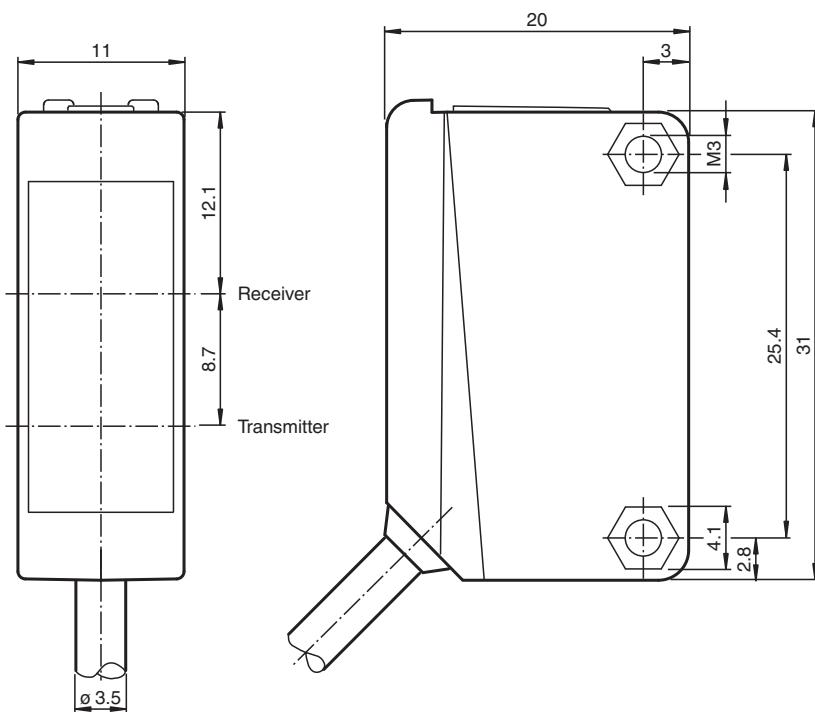

Release date: 2024-10-24 Date of issue: 2024-10-24 Filename: 297836_eng.pdf

Technical Data

General specifications

Effective detection range	0 ... 2.5 m
Reflector distance	0.05 ... 2.5 m
Threshold detection range	2.5 m

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS


Technical Data

Reference target	H50 reflector	
Light source	LED	
Light type	modulated visible red light	
Polarization filter	yes	
Diameter of the light spot	approx. 180 mm at a distance of 2.5 m	
Opening angle	approx. 4 °	
Optical face	frontal	
Ambient light limit	EN 60947-5-2:2007+A1:2012	
Functional safety related parameters		
MTTF _d	860 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	0 %	
Indicators/operating means		
Operation indicator	LED green: power on Teach-In : LED yellow/green; equiphase flashing; 2,5 Hz Teach Error:LED green/yellow non equiphase flashing; 8.0 Hz	
Function indicator	LED yellow: lights up when receiving the light beam OFF when light beam is interrupted	
Control elements	Teach-In rotary switch	
Control elements	Light-on/dark-on changeover switch preset to light-on	
Contrast detection levels	18 % - clear glass bottles 40 % - colored glass or opaque materials adjustable due to Teach-In switch	
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Ripple		max. 10 %
No-load supply current	I ₀	< 20 mA
Output		
Switching type	The switching type of the sensor is adjustable. The default setting is: light-on	
Signal output	1 PNP output, short-circuit protected, reverse polarity protected, open collector	
Switching voltage	max. 30 V DC	
Switching current	max. 100 mA, resistive load	
Voltage drop	U _d	≤ 1.5 V DC
Switching frequency	f	1000 Hz
Response time	0.5 ms	
Conformity		
Product standard	EN 60947-5-2	
Approvals and certificates		
UL approval	cULus Listed, Class 2 Power Source or listed Power Supply with a limited voltage output with (maybe integrated) fuse (max. 3.3 A according UL248), Type 1 enclosure	
CCC approval	CCC approval / marking not required for products rated ≤36 V	
Ambient conditions		
Ambient temperature	-30 ... 60 °C (-22 ... 140 °F)	
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)	
Mechanical specifications		
Degree of protection	IP67	
Connection	2 m fixed cable	
Material		
Housing	PC (Polycarbonate)	
Optical face	PMMA	
Mass	approx. 50 g	
Tightening torque, fastening screws	0.6 Nm	
Dimensions		
Height	31 mm	
Width	11 mm	


Technical Data

Depth	20 mm
Cable length	2 m

Connection




Assembly



1	Light/dark changeover switch
2	Teach-in and mode selection potentiometer
	T Teach-in mode
	I 18% contrast mode
	II 40% contrast mode
3	Signal indicator
	yellow
4	Operating indicator
	green

Characteristic Curve

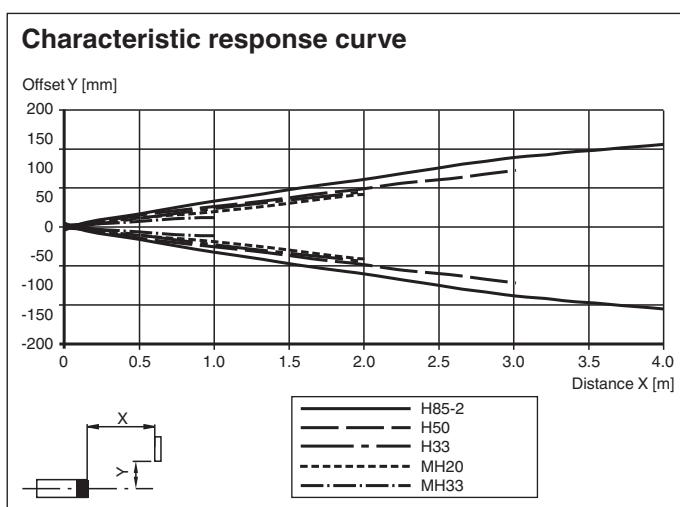

Reflector-dependent effective operating distances, typical

