



## AS-Interface splitter box


VAZ-T1-FK-G10-4M-PUR-V1-GV4A

- One piece housing
- Simple and fast mounting
- Stainless steel version, especially suitable for applications in the food industry
- Gold-plated and machined contacts
- Oil- and abrasion-resistant PUR cable
- Immunity to vibration
- Degree of protection IP68 / IP69K
- Halogen-free

G10 junction block, AS-Interface to 1x M12 round plug connector with stainless steel cap nut



### Dimensions

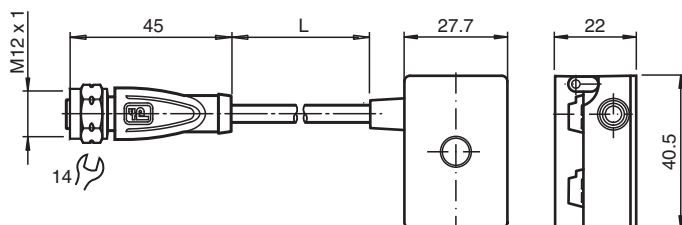

### Technical Data

#### General specifications

|                   |                                                      |
|-------------------|------------------------------------------------------|
| Construction type | Socket, straight<br>Flat cable terminal AS-Interface |
|-------------------|------------------------------------------------------|

#### Electrical specifications

|                         |       |                          |
|-------------------------|-------|--------------------------|
| Rated operating voltage | $U_e$ | $\leq 60 \text{ V PELV}$ |
| Rated operating current | $I_e$ | $\leq 4 \text{ A}$       |
| Protection class        |       | III                      |
| Surge protection        |       | overvoltage category III |

#### Compliance with standards and directives

|                      |               |
|----------------------|---------------|
| Standard conformity  |               |
| Degree of protection | EN 60529:2000 |

#### Approvals and certificates

|                                         |                                 |
|-----------------------------------------|---------------------------------|
| UL approval                             | cULus Listed, Type 1 enclosure  |
| Application                             | for use in NFPA 79 applications |
| Maximum permissible operating voltage   | max. 32 V                       |
| Maximum permissible operating current   | max. 3 A                        |
| Maximum permissible ambient temperature | max. 55 °C (max. 131 °F)        |
| UL File Number                          | E223772                         |

#### Ambient conditions

|                     |                                |
|---------------------|--------------------------------|
| Ambient temperature | -25 ... 75 °C (-13 ... 167 °F) |
| Storage temperature | -25 ... 85 °C (-13 ... 185 °F) |
| Pollution degree    | 3                              |

#### Mechanical specifications

|                      |                                                       |
|----------------------|-------------------------------------------------------|
| Degree of protection | IP67<br>IP67 / IP68 / IP69K with flat cable VAZ-FK-S* |
|----------------------|-------------------------------------------------------|

Release date: 2024-12-12 Date of issue: 2024-12-12 Filename: 301179\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**


Technical Data

|                                     |                                                                                        |                                                        |
|-------------------------------------|----------------------------------------------------------------------------------------|--------------------------------------------------------|
| Connection                          | Flat cable AS-Interface: cable piercing method<br>Plug connection: M12 x 1 socket (V1) |                                                        |
| Material                            |                                                                                        |                                                        |
| Contacts                            |                                                                                        | CuSn / Au                                              |
| Housing                             |                                                                                        | PBT PC                                                 |
| Body                                |                                                                                        | PUR, black                                             |
| Cable                               |                                                                                        | PUR                                                    |
| Slotted nut                         |                                                                                        | Stainless steel 1.4404 / AISI 316L                     |
| Mounting screw                      |                                                                                        | Stainless steel 1.4305 / AISI 303                      |
| Cable                               |                                                                                        |                                                        |
| Sheath diameter                     |                                                                                        | Ø4,3 mm                                                |
| Color                               |                                                                                        | black                                                  |
| Cores                               |                                                                                        | 2 x 0.5 mm <sup>2</sup>                                |
| Length                              | L                                                                                      | 4 m                                                    |
| Mass                                |                                                                                        | 75 g                                                   |
| Tightening torque, fastening screws |                                                                                        | 1.65 Nm                                                |
| Dimensions                          |                                                                                        |                                                        |
| Height                              |                                                                                        | 22 mm                                                  |
| Width                               |                                                                                        | 27.7 mm                                                |
| Length                              |                                                                                        | 40.5 mm                                                |
| Note                                |                                                                                        | The unused flat cable connector is closed with a seal. |

Connection

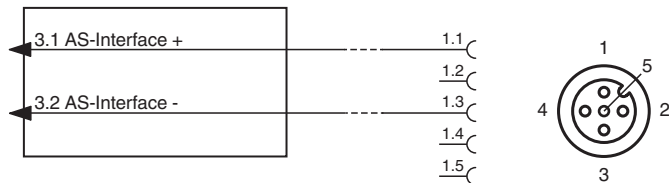

Mounting

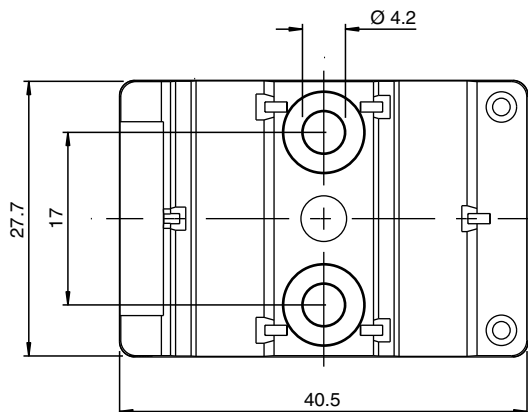

You may screw the device onto a level mounting surface using two M4 attachment screws. The attachment screws are not included.