



IO-Link Master

IO-Link-Master02-USB


IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection



Function

The IO-Link USB master is used for communication with IO-Link devices. Its purpose is to connect IO-Link sensors to a PC USB port. Following installation of the supplied FDT tools, connected IO-Link sensors can be conveniently configured and parameterized. Sensor diagnostics is also possible. For sensors with a low current consumption, power is supplied directly via the USB master. For sensors with a higher current consumption, an additional external power supply is available. The device is extremely well suited for testing purposes and for commissioning and service operations.

Dimensions

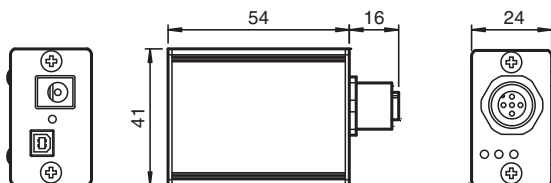

Technical Data

Indicators/operating means

Function indicator	communication: LED green status display: LED yellow diagnostic display: LED red Operating voltage indicator: yellow LED
--------------------	--

Electrical specifications

Operating voltage	U_B	24 V DC / USB 5 V DC
Operating current	I_B	≤ 500 mA

Interface

Interface type	IO-Link
Protocol	IO-Link V1.1 , IO-Link V1.0

Release date: 2020-06-30 Date of issue: 2020-06-30 Filename: 304074_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

Supported baud rates	COM 1 (4.8 kBaud) , COM 2 (38.4 kBaud) , COM 3 (230.4 kBaud)
Output	
Load current	max. 80 mA via USB for sensor supply voltage 1 A via external power supply
Approvals and certificates	
Approvals	CE
Ambient conditions	
Ambient temperature	0 ... 45 °C (32 ... 113 °F)
Storage temperature	-40 ... 80 °C (-40 ... 176 °F)
Relative humidity	95 % non-condensing
Mechanical specifications	
Degree of protection	IP20 (when properly connected)
Connection	IO-Link port: 5-pin, M12x1 socket, A-coded Operating voltage : DC-9, 2.1 mm USB 2.0 : MiniB USB plug-in connector
Material	
Housing	Aluminum
Mass	approx. 100 g
General information	
Scope of delivery	USB connection cable 24 V DC power supply IO-Link USB Master 2.0

Connection Assignment

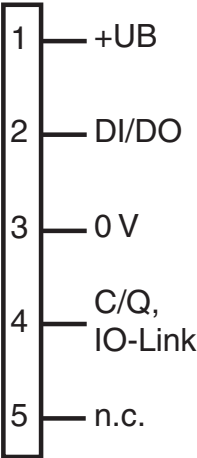


Connection Assignment



Release date: 2020-06-30 Date of issue: 2020-06-30 Filename: 304074_eng.pdf

Assembly

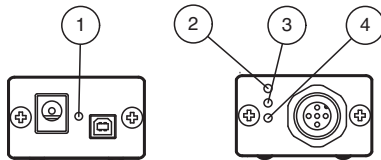

1	Operating display	yellow
2	Signal display CH1 (C/Q)	green/yellow
3	Signal display CH2 (DI/DO)	yellow
4	Error display	red

Accessories

	V19-G-BK2M-PUR-U-V1-G	Connection cable, M12 to M12, 8/4-pin, PUR cable
	IO-Link USB Master DTM 2.0	Communication DTM for operating the IO-Link USB Master 2.0
	PACTware 4.1	FDT Framework
	IODD Interpreter DTM	Software for the integration of IODDs in a frame application (e. g. PACTware)
	V15-G-1M-PUR-V15-G	Connecting cable, M12 to M12, PUR cable 5-pin
	IO-Link Offline Parameterization Tool	Installation package for IO-Link offline parameterization: PACTware DC, drivers for IO-Link USB-Master, IODD Interpreter DTM
	IO-Link-Master02-USB	IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection

Accessories

Other suitable accessories can be found at www.pepperl-fuchs.com

Release date: 2020-06-30 Date of issue: 2020-06-30 Filename: 304074_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**