



## Place Holder Module FB9299B3

- Parking of field circuits
- blue screw terminal
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)



### Technical Data

#### Supply

Connection	backplane bus
------------	---------------

#### Ambient conditions

Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration $\pm 0.075$ mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration $\pm 1$ mm/0.7 g; 90 minutes at each resonance

#### Mechanical specifications


Connection	removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm <sup>2</sup> ) or screw terminals (0.08 ... 1.5 mm <sup>2</sup> )
Mass	approx. 160 g
Dimensions	57 x 107 x 132 mm (2.2 x 4.2 x 5.2 inch)

#### General information

System information	The module has to be mounted in appropriate backplanes (FB92**) in Zone 1, 2, or outside hazardous areas. Observe the corresponding EC-type examination certificate.
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Assembly

Front view

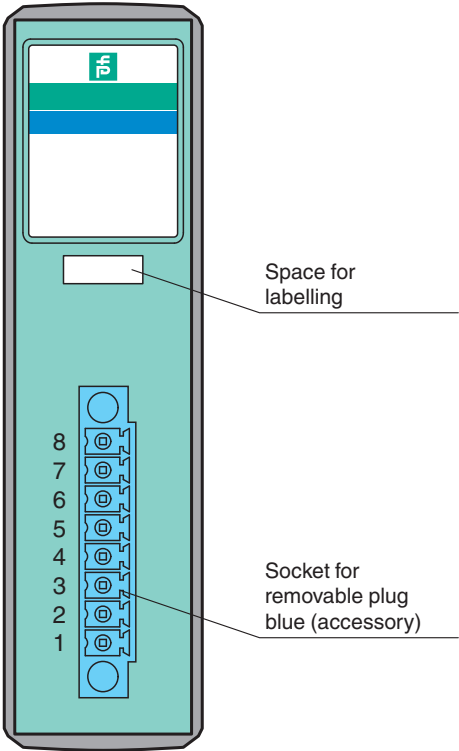

Release date: 2020-11-04 Date of issue: 2020-11-04 Filename: 304756\_eng.pdf