

# Cable connector, shielded V1S-W-15M-PUR-ABG0




- Degree of protection IP68 / IP69
- Halogen-free
- Shield not connected to screw connection
- Specific design protects against loosening and inaccurate installation

Male cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey, shielded



## Dimensions

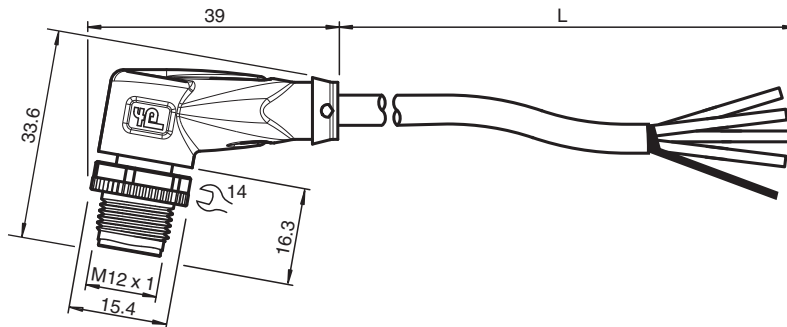

## Technical Data

### General specifications

|                   |  |                  |
|-------------------|--|------------------|
| Connector 1       |  |                  |
| Connection        |  | plug             |
| Construction type |  | M12              |
| Style             |  | angled           |
| Locking           |  | screw connection |
| Number of pins    |  | 4                |
| Coding            |  | A-coded          |
| Connector 2       |  |                  |
| Connection        |  | cable end        |

### Electrical specifications

|                   |                |                        |
|-------------------|----------------|------------------------|
| Operating voltage | U <sub>B</sub> | max. 48 V AC / 60 V DC |
| Operating current | I <sub>B</sub> | max. 4 A               |

### Conformity

|                      |  |                                      |
|----------------------|--|--------------------------------------|
| Degree of protection |  | EN 60529                             |
| Plug connection      |  | connector M12 x 1 : IEC 61076-2-101  |
| Halogen-free         |  | DIN VDE 0472-815<br>DIN EN 50267-2-1 |

### Ambient conditions

|                     |  |                                |
|---------------------|--|--------------------------------|
| Ambient temperature |  |                                |
| Plug connector      |  | -40 ... 90 °C (-40 ... 194 °F) |
| Cable, fixed        |  | -40 ... 80 °C (-40 ... 176 °F) |

Release date: 2023-09-04 Date of issue: 2023-09-04 Filename: 305414\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com



Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

|                                  |                                |                                                                 |
|----------------------------------|--------------------------------|-----------------------------------------------------------------|
| Cable, flexing                   | -25 ... 80 °C (-13 ... 176 °F) |                                                                 |
| Pollution degree                 |                                | 3                                                               |
| <b>Mechanical specifications</b> |                                |                                                                 |
| Plug connector                   |                                |                                                                 |
| Tightening torque                |                                | 0.6 Nm                                                          |
| Loosening protection             |                                | available                                                       |
| Tool installation                |                                | straight knurling and hexagon nut SW = 14 mm                    |
| Mating cycles                    |                                | min. 100                                                        |
| Shielding                        |                                | shield not connected to connector                               |
| Degree of protection             |                                | IP68 / IP69                                                     |
| Cable                            |                                | according to IEC/EN 60228 (DIN VDE 0295) class 5                |
| Sheath diameter                  |                                | 4.8 mm                                                          |
| Bending radius                   |                                | > 10 x cable diameter, moving<br>> 5 x cable diameter, fixed    |
| Sheath stripping force           |                                | max. 100 N / 300 mm                                             |
| Sheath color                     |                                | grey (similar to RAL 7001)                                      |
| Number of cores                  |                                | 4                                                               |
| Core cross section               |                                | 0.34 mm <sup>2</sup>                                            |
| Cores color                      |                                | Core 1: brown<br>Core 2: white<br>Core 3: blue<br>Core 4: black |
| Core construction                |                                | 19 x 0.15 mm Ø                                                  |
| Shield                           |                                | tinned copper braiding, 85 % coverage                           |
| Length                           | L                              | 15 m                                                            |
| Cable code                       |                                | Li 9Y 11YM 4 x 0.34                                             |
| <b>Material</b>                  |                                |                                                                 |
| Halogen-free                     |                                | yes                                                             |
| Plug connector                   |                                |                                                                 |
| Screw connection                 |                                | Zinc diecast, nickel-plated                                     |
| Body                             |                                | TPU, black                                                      |
| Contact surface                  |                                | gold plated (Au)                                                |
| Flammability                     |                                | V-2                                                             |
| Cable                            |                                |                                                                 |
| Sheathing                        |                                | PUR based on polyether                                          |
| Core insulation                  |                                | PP                                                              |
| Chemical resistance              |                                | good                                                            |

## Connection



## Accessories

|                                                                                     |                          |                             |
|-------------------------------------------------------------------------------------|--------------------------|-----------------------------|
|  | <b>MH V1-SCREWDRIVER</b> | Torque screwdriver (0.6 Nm) |
|-------------------------------------------------------------------------------------|--------------------------|-----------------------------|

## Accessories

|                                                                                   |                              |                                                  |
|-----------------------------------------------------------------------------------|------------------------------|--------------------------------------------------|
|  | <b>MH V1-BIT M12</b>         | plug-in cap M12                                  |
|  | <b>V1/V3-LABELHOLDER</b>     | Label holder                                     |
|  | <b>V1/V3-LABEL</b>           | Label plate                                      |
|  | <b>MH V1-Holder</b>          | Modular universal holder for M12 connectors      |
|  | <b>V1-CLIP</b>               | Unlocking protector for M12 connector            |
|  | <b>V1-MARKING-RING-COLOR</b> | Marking rings for M12 connectors, various colors |