



## Connection cable


### V15L-G-10M-PUR-U-V15L-G

- Degree of protection IP65 / IP67 / IP69
- Free of paint wetting interfering substances
- UL listed for USA and Canada
- Halogen-free
- 600 V AC rated operational voltage
- Screw connection suitable for tool assembly
- Image is generic for this device type and may deviate from the specific variant

Cordset M12 socket straight to M12 plug straight L-coded, 5-pin, PUR cable grey, UL approved



## Dimensions

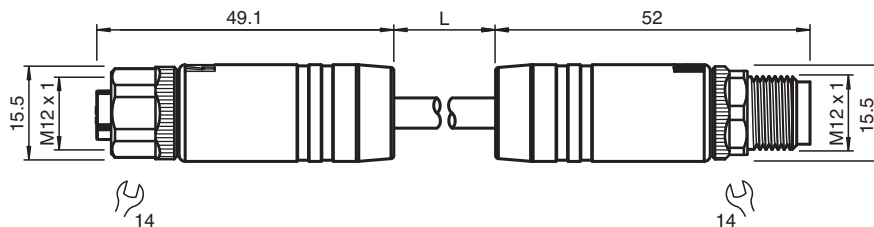

## Technical Data

### General specifications

|                   |  |                  |
|-------------------|--|------------------|
| Connector 1       |  |                  |
| Connection        |  | socket           |
| Construction type |  | M12              |
| Style             |  | straight         |
| Locking           |  | screw connection |
| Number of pins    |  | 5                |
| Coding            |  | L-coded          |
| Connector 2       |  |                  |
| Connection        |  | plug             |
| Construction type |  | M12              |
| Style             |  | straight         |
| Locking           |  | screw connection |
| Number of pins    |  | 5                |
| Coding            |  | L-coded          |

### Electrical specifications

|                         |       |                        |
|-------------------------|-------|------------------------|
| Rated operating voltage | $U_e$ | 600 V AC               |
| Operating voltage       | $U_B$ | max. 48 V AC / 63 V DC |
| Operating current       | $I_B$ | max. 16 A              |

### Conformity

|                      |  |                                     |
|----------------------|--|-------------------------------------|
| Degree of protection |  | EN 60529                            |
| Plug connection      |  | connector M12 x 1 : IEC 61076-2-111 |
| Flammability         |  | IEC 60332-1-2                       |
| Halogen-free         |  | DIN VDE 0472-815                    |

Release date: 2023-09-05 Date of issue: 2023-09-05 Filename: 308600\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com



Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

|                                   |   |                                                                                 |
|-----------------------------------|---|---------------------------------------------------------------------------------|
| Oil resistance                    |   | DIN EN 60811-404                                                                |
| <b>Approvals and certificates</b> |   |                                                                                 |
| UL approval                       |   | AWM STYLE 20939 80°C 600V VW-1 (cable)                                          |
| UL File Number                    |   | E520151                                                                         |
| <b>Ambient conditions</b>         |   |                                                                                 |
| Ambient temperature               |   |                                                                                 |
| Plug connector                    |   | -40 ... 125 °C (-40 ... 257 °F) note derating                                   |
| Cable, fixed                      |   | -40 ... 90 °C (-40 ... 194 °F) UL -40 ... 80 °C (-40 ... 176 °F)                |
| Cable, flexing                    |   | -30 ... 90 °C (-22 ... 194 °F) UL -30 ... 80 °C (-22 ... 176 °F)                |
| Pollution degree                  |   | 3                                                                               |
| <b>Mechanical specifications</b>  |   |                                                                                 |
| Plug connector                    |   |                                                                                 |
| Tightening torque                 |   | 0.6 Nm                                                                          |
| Tool installation                 |   | straight knurling and hexagon nut SW = 14 mm                                    |
| Mating cycles                     |   | min. 100                                                                        |
| Degree of protection              |   | IP65/IP67/IP69                                                                  |
| Cable                             |   | according to IEC/EN 60228 (DIN VDE 0295) class 5                                |
| Sheath diameter                   |   | 8 mm                                                                            |
| Bending radius                    |   | > 7.5 x cable diameter, moving<br>> 4 x cable diameter, fixed                   |
| Sheath color                      |   | grey (similar to RAL 7032)                                                      |
| Number of cores                   |   | 5                                                                               |
| Core cross section                |   | 1.5 mm <sup>2</sup>                                                             |
| Cores color                       |   | Core 1: brown<br>Core 2: white<br>Core 3: blue<br>Core 4: black<br>Core 5: pink |
| Length                            | L | 10 m                                                                            |
| Cable code                        |   | Li 9Y 11Y 5 x 1,50                                                              |
| <b>Material</b>                   |   |                                                                                 |
| PWIS free                         |   | yes                                                                             |
| Halogen-free                      |   | yes                                                                             |
| Plug connector                    |   |                                                                                 |
| Screw connection                  |   | Zinc diecast, nickel-plated                                                     |
| Body                              |   | TPE, black                                                                      |
| Seal                              |   | FKM                                                                             |
| Contact surface                   |   | Cu/Au                                                                           |
| Flammability                      |   | HB                                                                              |
| Cable                             |   |                                                                                 |
| Sheathing                         |   | PUR                                                                             |
| Core insulation                   |   | PP                                                                              |
| Oil resistance                    |   | yes                                                                             |
| Flammability                      |   | VW-1                                                                            |

## Connection



Accessories

|                                                                                   |            |                            |
|-----------------------------------------------------------------------------------|------------|----------------------------|
|  | VAZ-V1-B3L | Blind plug for M12 sockets |
|-----------------------------------------------------------------------------------|------------|----------------------------|

Release date: 2023-09-05 Date of issue: 2023-09-05 Filename: 308600\_eng.pdf