




Junction Box Ex e, Glass-Fiber Reinforced Polyester (GRP)

GR.TJE.13.18.09.B-S0003

- Carbon loaded, antistatic glass-fiber reinforced polyester
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22
- Ex eb, Ex ia and Ex tb certified
- 129 mm x 179 mm x 91 mm
- Modern design with high impact resistance
- Easy installation due to easily accessible mounting points
- Easy cover opening without damage due to multiple pry points
- Bottom face cable glands polyamide, 4x M16 1x M20



Dimensions

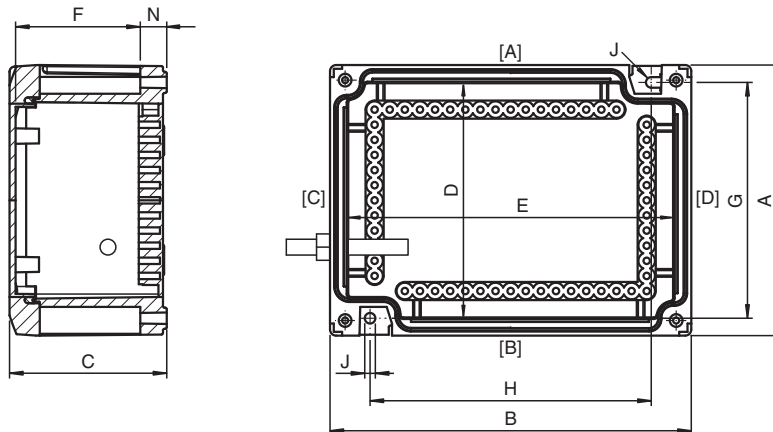

Dimension values see data table.

Image and drawing are generic for this device type and may deviate from the specific variant.

Technical Data

Electrical specifications

Operating voltage	690 V AC / DC max. for ATEX / IECEx 600 V AC / DC max. for North American approvals
Operating current	350 A max.

Mechanical specifications

Enclosure cover	fully detachable
Cover fixing	
Screws	M6 stainless steel combination Phillips and slotted screw
Number	2
Tightening torque	3.5 Nm
Cover seal	foamed silicone
Degree of protection	IP66 , NEMA Type 4X
Cable entry	thru-holes
Cable entry face B	
M16 quantity	4

Release date: 2023-08-28 Date of issue: 2023-08-28 Filename: 320194_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

M16 series		Cable Glands, Plastic
M16 type		CG.PIDS1.M16.*
M16 clamping range		4 ... 8 mm
M20 quantity		1
M20 series		Cable Glands, Plastic
M20 type		CG.PEDS1.M20.*
M20 clamping range		6 ... 12 mm
Terminal assembly		
Rail orientation		horizontal
Number of horizontal rails		1
Usable length per horizontal rail		101.5 mm
Terminal type		8 x WDU 2.5 5 x ZB4 2.5
Terminal capacity		2.5 mm ²
Number of terminals per horizontal rail		8
Material		
Enclosure		carbon loaded, antistatic glass-fiber reinforced polyester (GRP)
Finish		inherent color black
Grounding plate		2 mm brass optional
Mass		approx. 1 kg
Dimensions		
External dimension (A)		129 mm
External dimension (B)		179 mm
External dimension (C)		91.5 mm
Internal dimension (D)		106 mm
Internal dimension (E)		156 mm
Internal dimension (F)		69 mm
Mounting holes distance (G)		106 mm
Mounting holes distance (H)		126 mm
Mounting holes diameter (J)		7 mm
Thickness of mounting brackets (N)		18 mm
Mounting		2 screws
Grounding		none as standard optional M6 or M8 internal/external brass nickel-plated grounding bolt optional M6 or M8 internal/external stainless steel grounding bolt
Ambient conditions		
Ambient temperature		-60 ... 85 °C (-76 ... 185 °F)
Data for application in connection with hazardous areas		
EU-type examination certificate		CML 17 ATEX 3255X
Marking		Ex II 2 GD Ex eb IIC T* Gb Ex ia IIC T* Gb Ex tb IIC T** °C Db T6/T80 °C @ Ta +40 °C T5/T95 °C @ Ta +55 °C T4/T130 °C @ Ta +65 °C
International approvals		
IECEx approval		IECEx CML 17.0144X
UKCA approval		CML 21 UKEX 3896X
Further approvals		further on request
Conformity		
Degree of protection		EN60529 or UL 50 / UL 50E
CE marking		0102
General information		

Release date: 2023-08-28 Date of issue: 2023-08-28 Filename: 320194_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

Technical Data

Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .
Accessories	
Optional accessories	M6 or M8 internal/external brass nickel-plated grounding bolts M6 or M8 internal/external stainless steel grounding bolts

Release date: 2023-08-28 Date of issue: 2023-08-28 Filename: 320194_eng.pdf