



## Inclination sensor INX360DH-F199-IE2-V19


- Sturdy housing
- High accuracy of  $\leq \pm 0,15^\circ$
- Analog output 4 mA ... 20 mA
- 1-axis with  $360^\circ$  measuring range



### Function

This inclination sensor has a analog output 4 mA ... 20 mA. With its sturdy housing and its high accuracy, it is ideally suited for applications in the fields of solar, wind or mobile equipment.

### Dimensions

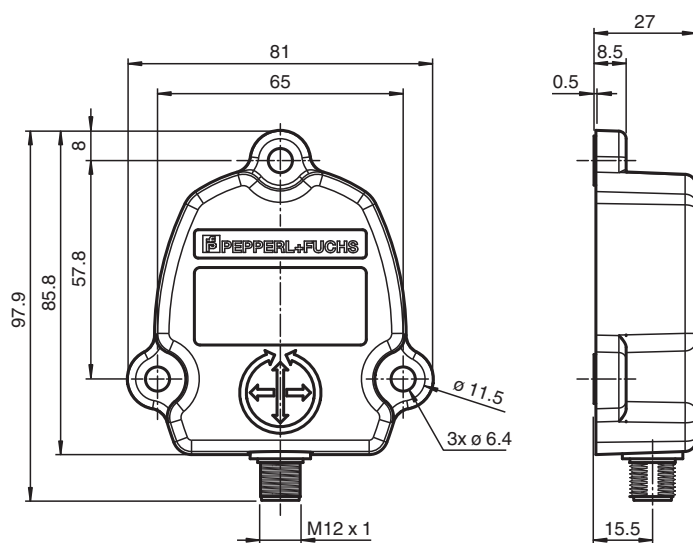

### Technical Data

#### General specifications

|                                |                            |
|--------------------------------|----------------------------|
| Type                           | Inclination sensor, 1-axis |
| Time delay before availability | 125 ms                     |
| Measurement range              | 0 ... 360 °                |
| Absolute accuracy              | $\leq \pm 0.15^\circ$      |

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data


|                                                 |                |                                          |
|-------------------------------------------------|----------------|------------------------------------------|
| Response delay                                  |                | ≤ 100 ms                                 |
| Resolution                                      |                | ≤ 0.01 °                                 |
| Temperature influence                           |                | ≤ 0.004 °/K                              |
| <b>Functional safety related parameters</b>     |                |                                          |
| MTTF <sub>d</sub>                               |                | 700 a at 40 °C                           |
| Mission Time (T <sub>M</sub> )                  |                | 20 a                                     |
| Diagnostic Coverage (DC)                        |                | 0 %                                      |
| <b>Electrical specifications</b>                |                |                                          |
| Operating voltage                               | U <sub>B</sub> | 10 ... 30 V DC                           |
| No-load supply current                          | I <sub>0</sub> | ≤ 65 mA at 10 V DC<br>≤ 60 mA at 24 V DC |
| <b>Analog output</b>                            |                |                                          |
| Output type                                     |                | current output 4 ... 20 mA               |
| Load resistor                                   |                | 270 Ω at 10 V DC                         |
| <b>Compliance with standards and directives</b> |                |                                          |
| Standard conformity                             |                |                                          |
| Noise immunity                                  |                | EN 61000-6-2                             |
| Emitted interference                            |                | EN 61000-6-4                             |
| Shock and impact resistance                     |                | DIN EN 60068-2-27, 100 g, 6 ms           |
| Vibration resistance                            |                | DIN EN 60068-2-6, 20 g, 10 ... 2000 Hz   |
| <b>Ambient conditions</b>                       |                |                                          |
| Ambient temperature                             |                | -40 ... 85 °C (-40 ... 185 °F)           |
| Storage temperature                             |                | -40 ... 85 °C (-40 ... 185 °F)           |
| <b>Mechanical specifications</b>                |                |                                          |
| Connection type                                 |                | 8-pin, M12 x 1 connector , A-coded       |
| Housing material                                |                | aluminum, corrosion-resistant            |
| Degree of protection                            |                | IP68 / IP69                              |
| Mass                                            |                | approx. 200 g                            |

## Accessories

|                                                                                     |                               |                                                         |
|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------|
|  | <b>V19-G-2M-PUR-ABG</b>       | Female cordset, M12, 8-pin, shielded, PUR cable         |
|  | <b>V19-G-2M-PUR-ABG-V19-G</b> | Connecting cable, M12 to M12, PUR cable 8-pin, shielded |
|  | <b>V19-G-0,5M-PVC-SUBD9</b>   | Adapter cable M12 x 1 to sub-D, including DC coupling   |

Mounting

X-Orientation



Electrical connection

| Signal               | 8-pin, M12 x 1 connector |
|----------------------|--------------------------|
| +U <sub>b</sub>      | 1                        |
| RxD                  | 2                        |
| TxD                  | 3                        |
| GND                  | 4                        |
| Analog output X axis | 5                        |
| Set 1                | 6                        |
| Static 2.2 mA        | 7                        |
| Set 2                | 8                        |
| Pinout               |                          |