



Place Holder Barrier KFD0-LGH-Y34868


- K-System place holder module
- Housing width 20 mm
- Marshalling for field and control side circuits
- No electrical function: empty housing

Place holder barrier for KF modules

Function

The device is an empty housing that fills unused space on the DIN mounting rail or Power Rail.

Connection

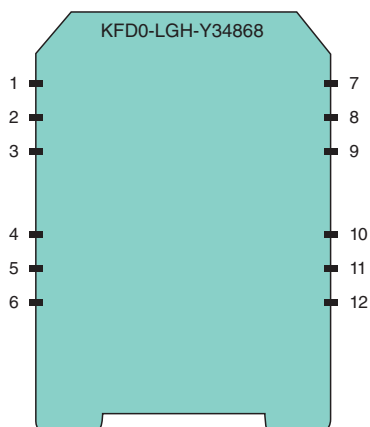

Technical Data

Electrical specifications

Rated voltage	U_r	$\leq 50 \text{ V}$
Rated current	I_r	$\leq 2 \text{ A}$

Indicators/settings

Labeling	space for labeling at the front
----------	---------------------------------

Conformity

Degree of protection	IEC 60529
----------------------	-----------

Ambient conditions

Ambient temperature	$-20 \dots 60 \text{ }^{\circ}\text{C}$ ($-4 \dots 140 \text{ }^{\circ}\text{F}$)
---------------------	---

Mechanical specifications

Degree of protection	IP20
Connection	without terminals
Mass	approx. 100 g
Dimensions	20 x 93 x 115 mm (0.8 x 3.7 x 4.5 inch) (W x H x D) , housing type B1

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

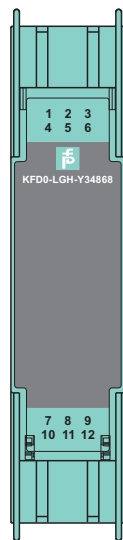

Release date: 2023-05-02 Date of issue: 2023-05-02 Filename: 034868_eng.pdf