




Stopping Plugs, Metal, Hexagon Head SP.MD.NPT3/8.BN.X.16.K50

- Stopping plug for unused cable entries
- Brass nickel-plated
- Thread NPT 3/8"
- Hexagon head
- Ex eb and Ex tb certified
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Suitable for operation in Class I, Zone 1/2/22
- Suitable for operation in Class I, Division 2 when installed in accordance with NEC501.10(B)(2)
- Degree of protection IP66 / IP68, UL Type 4X
- Packaging unit: 50 pieces, without accessories



Dimensions

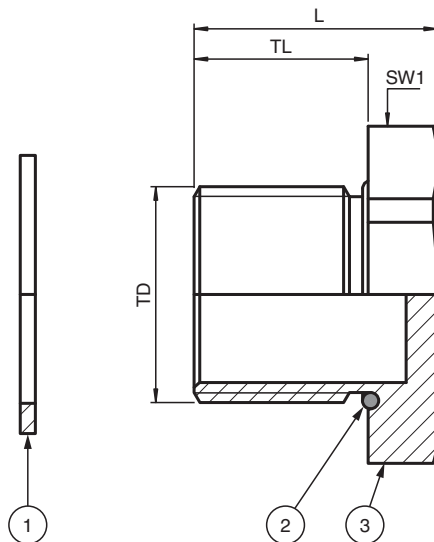

Details see data table

Legend	
1	Washer gasket (accessory, metric versions only)
2	O-Ring (metric versions only)
3	Stopping plug
L	Total length
SW*	Width across flats
TD	Thread size
TL	Thread length

Release date: 2022-05-04 Date of issue: 2022-05-04 Filename: 400847_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Mechanical specifications		
Thread type		NPT ANSI ASME B1.20.1
Thread size (TD)		NPT 3/8"
Degree of protection		IP66 / IP68 , UL Type 4X
Material		
Finish		inherent color silver
Stopping plug		brass, nickel-plated
Mass		
Individual component		approx. 24 g
Packing unit		approx. 1.32 kg
Dimensions		
Diameter thru-hole (DT)		17.2 ... 17.4 mm
Width across flats (SW1)		20 mm
Thread length (TL)		16 mm
Total length (L)		20 mm
Tightening torque		
Nut torque at enclosure (SW1)		7 Nm
Ambient conditions		
Ambient temperature		-60 ... 130 °C (-76 ... 266 °F) washer gasket: -40 ... 80 °C (-40 ... 176 °F)
Data for application in connection with hazardous areas		
EU-type examination certificate		CESI 15 ATEX 029 X
Marking		Ⓔ II 2 GD Ex eb IIC Gb Ex tb IIIC Db
International approvals		
UL approval		
cULus		E305142 tested to UL 50E and UL 508A
CSA approval		CSA C22.2, No. 14-13
IECEX approval		IECEX CES 15.0006X
EAC approval		RU C-DE.AA87.B.00459/20
Conformity		
Degree of protection		EN 60529
General information		
Delivery quantity		50
Scope of delivery		Stopping Plugs, Metal, Hexagon Head brief instructions (1 copy)
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .