




Stopping Plugs, Metal, Hexagon Head SP.MD.NPT1.SS.X.21.K25

- Stopping plug for unused cable entries
- Stainless Steel
- Thread NPT 1"
- Hexagon head
- Ex eb and Ex tb certified
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Suitable for operation in Class I, Zone 1/2/22
- Suitable for operation in Class I, Division 2 when installed in accordance with NEC501.10(B)(2)
- Degree of protection IP66 / IP68, UL Type 4X
- Packaging unit: 25 pieces, without accessories



Dimensions

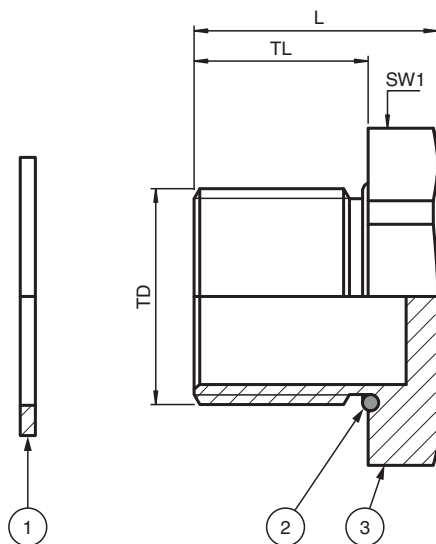

Details see data table

Legend	
1	Washer gasket (accessory, metric versions only)
2	O-Ring (metric versions only)
3	Stopping plug
L	Total length
SW*	Width across flats
TD	Thread size
TL	Thread length

Release date: 2024-03-19 Date of issue: 2024-03-19 Filename: 400857_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Mechanical specifications		
Thread type		NPT ANSI ASME B1.20.1
Thread size (TD)		NPT 1"
Degree of protection		IP66 / IP68 , UL Type 4X
Material		
Finish		inherent color silver
Stopping plug		stainless steel
Mass		
Individual component		approx. 87 g
Packing unit		approx. 2.39 kg
Dimensions		
Diameter thru-hole (DT)		33.5 ... 33.7 mm
Width across flats (SW1)		35 mm
Thread length (TL)		21 mm
Total length (L)		25 mm
Tightening torque		
Nut torque at enclosure (SW1)		11 Nm
Ambient conditions		
Ambient temperature		-60 ... 130 °C (-76 ... 266 °F) washer gasket: -40 ... 80 °C (-40 ... 176 °F)
Data for application in connection with hazardous areas		
EU-type examination certificate		CESI 15 ATEX 029X
Marking		Ⓔ II 2 GD Ex eb IIC Gb Ex tb IIIC Db
International approvals		
UL approval		
cULus		E305142 tested to UL 50E and UL 508A CSA C22.2, No. 14-13
IECEx approval		IECEx CES 15.0006X
UKCA approval		CML 22 UKEX 1267X
CCC approval		2021312313000343
Conformity		
Degree of protection		EN 60529
General information		
Delivery quantity		25
Scope of delivery		Stopping Plugs, Metal, Hexagon Head Brief instructions (1 copy)
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .