



Model Number


ASK /70 KL.2000MM

Female cordset, M9, 5-pin, cable

Features

- UL Recognized Component
- Screw lock
- Degree of protection IP67

Dimensions

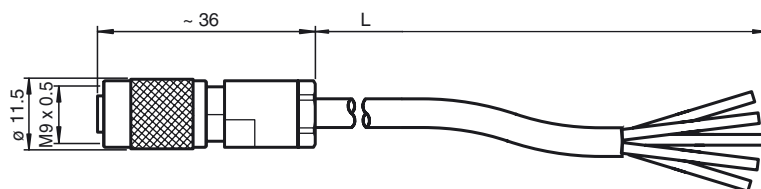

Technical data

General specifications

Number of pins	5
----------------	---

Electrical specifications

Operating voltage	U_B	max. 125 V DC
Test voltage		> 1500 V _{eff} AC
Operating current	I_B	max. 3 A
Volume resistance		< 3 mΩ

Ambient conditions

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Pollution Degree	1


Mechanical specifications

Contact elements	spring-loaded contact socket	
Pin diameter	1 mm	
Degree of protection	IP67	
Material		
Contacts	CuSn	
Contact surface	Au	
Body	PA 66 , black	
Slotted nut	CuZn, nickel-plated	
Cable	fine-strand, flexible	
Sheath diameter	Ø5.2 mm	
Color	black	
Cores	5 x 0.25 mm ²	
Conductor construction	28 x 0.07 mm Ø	
Length	L	2 m

Approvals and certificates

UL approval	cURus AWM 20549 AWM I/II A/B 80°C 300V FT2 (cable)
-------------	--

Electrical connection



1	—	WH
2	—	BN
3	—	GN
4	—	GY
5	—	YE